


DOUGLAS COUNTY SURVEYOR

NAD 756833.03 +155860.72
86 48'39" 123°23' 47"



T 22 S, R 6W, Sec. 15

Station: "K" PT.

Set By (Agency): DCS

Date: 1978

NGVD 29

K-018

VERTICAL CONTROL

Elevation: 1241.2 NGS(USC&GS) Line # _____ USGS Line # _____

Order _____ Agency: D.C.S.O. Proj. #: 2008 Date: 1979
(North County)
Of Precision VA

HORIZONTAL CONTROL

NAD 27


Oregon State Plane Coordinates: Y(Northing) 736,367.80 X(Easting) 1,234,402.76
(South Zone)

Order _____ Agency: D.C.S.O. Proj. #: 2008 Date: 1979
(North County)
Of Precision 1:50,000

Approximate Geographic Position: Latitude= 43° 39' 03" Longitude= 123° 23' 36"

DESCRIPTION: From Drain go West on Hwy 38 1.0 mi. to Hayhurst Rd., turn left on Hayhurst Rd., go 1.8 mi. to gravel pit on right, go 0.4 mi. through gravel pit (keeping to the left by crossing plank bridge) to road fork, keep right and go 0.2 mi. to road fork, keep right and go 0.4 mi. to road fork, keep left and go 2.0 mi. to Dim Road on right, go 0.6 mi. on Dim Road to fork, keep left and go on Jeep Road 0.4 mi. to landing at bottom of hill. Point, which is a 5/8 " iron rod, is 60 ft. uphill from landing, on Easterly side of hill. From monument "K" Pt. Rm 1 a boat spike in a tree bears S20°26' 13"E 16.26 ft. Rm 2 a boat spike in a stump bears S31°21'40"W, 50.93 ft.

SKETCH

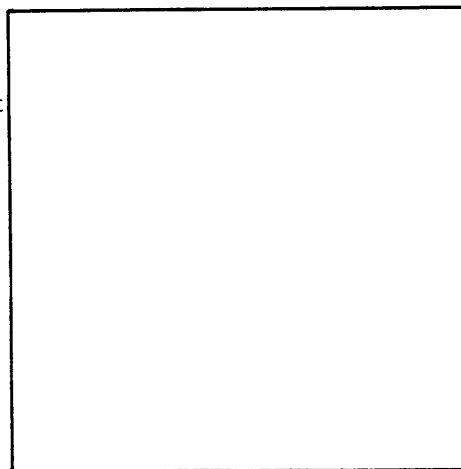

VICINITY: Approx. 5 mi. SW of Drain.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.