


OFFICE OF THE  
DOUGLAS COUNTY SURVEYOR

11/19/81

n-053  
NU 25

26S 3W 17

NAD 609494.12 4236843.39  
83 43°18'37" 123° 4'19"



T 26 S, R 3 W, Sec. 17

Station: NU-25

Set By (Agency): DCSO

Date: 1972

VERTICAL CONTROL

NGVD 29

Elevation: 722.370 NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order \_\_\_\_\_ Agency: DCSO Proj. #: 2006 Date: 1972  
Of Precision 2nd (River Floodplain)

HORIZONTAL CONTROL

OCS 27


Oregon State Plane Coordinates: Y(Northing) 609,529.71 X(Easting) 1,315,883.33  
(South Zone)

Order \_\_\_\_\_ Agency: DCSO Proj. #: 2006 Date: 1972  
Of Precision 1/25,000 (River Floodplain)

Approximate Geographic Position: Latitude= 43°18'37" Longitude= 123°04'15"

DESCRIPTION: Bronze disk set in concrete post  
marker sign along side. 300 ft. East of  
East end of Lone Rock Bridge. Disk marked  
"NU 25 1972".

SKETCH

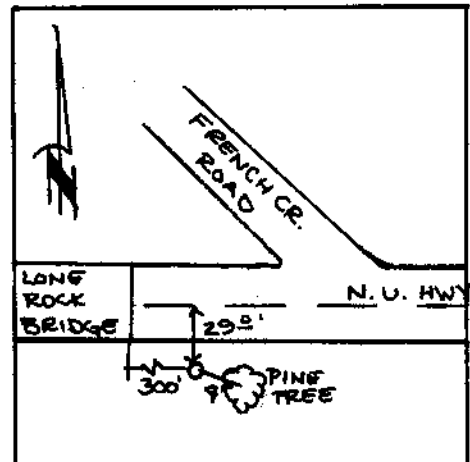

VICINITY: 1.5 mi. Easterly from Glide  
Ranger Sta. along Hwy 138.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.