

2/13/81


OFFICE OF THE

0-004
OAK HILL

255 6W 31

DOUGLAS COUNTY SURVEYOR

NAD 629295.58 4136165.06
88 43°21'10" 123°27'10"



T 25 S, R 6W, Sec. 31

Station: OAK HILL

Set By (Agency): DCSO

Date: 1974

VERTICAL CONTROL

Elevation: 370.060 NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision 2nd Agency: DCSO Proj. #: 2007 Date: 1991

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 629,330.33 X(Easting) 1,215,209.26
(South Zone)

Order
Of Precision 1/25,000 Agency: DCSO Proj. #: 2006 Date: 1974
(River Floodplain)

Approximate Geographic Position: Latitude= 43° 21' 20" Longitude= 123° 27' 05"

DESCRIPTION: FROM UMPQUA POST OFFICE PROCEED

W. 0.30 MILES TO INTERSECTION . GO LEFT

(C.R.#6)


ACROSS BRIDGE ON GARDEN VALLEY RD. 0.95

MILES TO STATION WHICH IS LOCATED AT THE
(C.R.#6) (C.R.#22)
INTERSECTION OF GARDEN VALLEY AND OAK HILL

ROAD MONUMENT IS APPROX. 15 FT. W. OF CENTER-
LINE INTERSECTION AND IS ON A CUT BANK APPROX.
3FT. HIGHER THAN THE ROAD SURFACE.

VICINITY: ON GARDEN VALLEY ROAD S. OF UMPQUA.

SKETCH

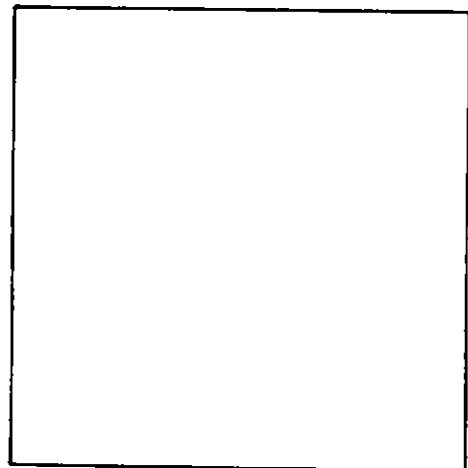

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.