


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR



T 23 S, R 5W, Sec. 15

Station: P-10

Set By (Agency): USGS

Date: 1917

P-002

VERTICAL CONTROL

NGVD 29
Elevation: 390.065 NGS(USC&GS) Line # _____ USGS Line # 6

Order
Of Precision 1st Agency: USC & GS Proj. #: _____ Date: 1956

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) _____ X(Easting) _____
(South Zone)

Order
Of Precision _____ Agency: _____ Proj. #: _____ Date: _____

Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: Disk stamped " prim. Trav.

Sta. No. 7 389 B 1903 1917" 24.2 ft. E. of

E. rail (SPRR) 0.8 ft. W. of a fence, about

1 ft. lower than the track, 70 ft. N. of

Twin culvert stream crossing 215 ft. N.


of N. edge of SB I-5 RR overcrossing.

Disk is riveted on top of a 3 1/2" iron pipe

projecting 1.1 ft. above the ground.

VICINITY: Along I-5 0.24 mi. N. of Yoncalla
exit overcrossing I-5.

SKETCH

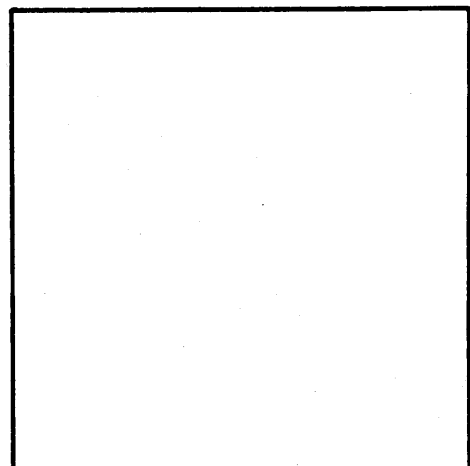

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.