OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

r-006
R 444

NAD	540595.96	4142492.42
83	43° 6'46"	123°25' 2"

Station: R 444 T 28 S, R 6 W , Sec 21
Set By (Agency): OSHD
Date Set: 1952
Recovered By RS,SJF
Date Recovered Oct. 24,1984
Recovered By
Date Recovered
Recovered By
Date Recovered



VERTICAL CONTROL NGVD 29

Elevation: 525.435 ft. NGS Line # 6 USGS Line # OSHD Line #
Precision: 1st. Agency: USC&GS Proj. # Date: 1957

HORIZONTAL CONTROL OCS 27

South Zone State Plane Coordinates: Y(Northing) 540,631.10 X(Easting) 1,221,534.14
Precision: 1/25,000 Agency: DCSO Proj. # 2008-2013 Date: 1984
Approximate Geographic Position: Latitude 43°06'47" Longitude 123°24'58"

DESCRIPTION and TO REACH

An OSHD disk stamped "R 444 1952" set flush in the southeast corner of southeast sidewalk of highway bridge over South Umpqua River.

TO REACH:

From the intersection of State Highway 99 and Thompson Ave.(Co. Rd. #266) in Winston, T28S,R6W,Sec. 21, proceed southwesterly approx. 0.2 miles along State Highway99 to bridge over South Umpqua River and monument on left.

SKETCH

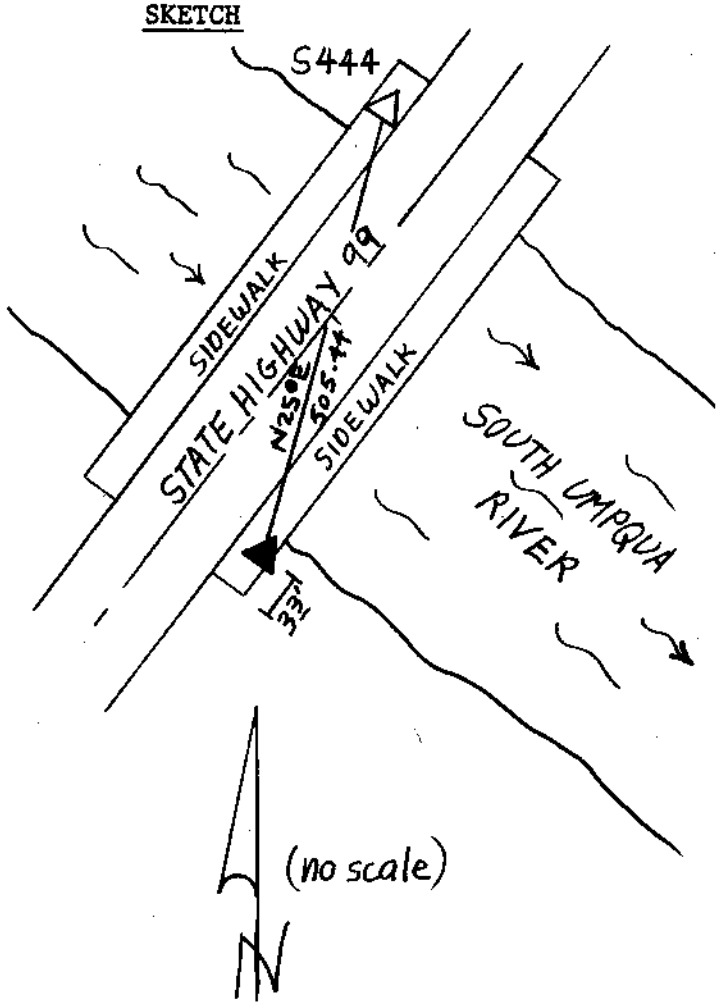

Reference Marks:

A OSHD disk stamped "S 444 1952"
bears N 27°11'45" E, 505.44 ft. (grid).

Note: For further information, contact the Douglas County Surveyor's Office, Room 205 Douglas County Justice Building, Roseburg, OR 97470. Phone 440-4278. Douglas County residents outside the Roseburg calling area, dial toll free 1-800-452-0991.