


OFFICE OF THE

DOUGLAS COUNTY SURVEYOR

r-034
REUBEN 1980

26S 4W 14

NAD 607476.44 4220548.05
83 43°18'12" 123° 7'59"



T 26 S, R 4 W., Sec. 14

Station: REUBEN

Set By (Agency): DCSO

Date: 1980

VERTICAL CONTROL

Elevation: _____ NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision _____ Agency: _____ Proj. #: _____ Date: _____

HORIZONTAL CONTROL

OCS 27


Oregon State Plane Coordinates: Y(Northing) 607,511.90 X(Easting) 1,299,588.23
(South Zone)

Order
Of Precision 1/25,000 Agency: DCSO Proj. #: 6012-12 CS#61/13 Date: 1980

Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: STATION MARK IS A STANDARD DOUG-
LAS COUNTY SURVEYORS OFFICE BRASS CAP
MARKED "REUBEN 1980". CAP IS SET FLUSH
WITH GROUND IN A 6"x40" CEMENT BELL TILE
FILLED WITH CONCRETE. MONUMENT IS 36 1/2
FEET NORTH OF NRTH'LY FOGLENE CO. RD. #4,
6 FEET ABOVE ASPHALT LEVEL. NORTHERLY
R/W FENCE IS 2 FEET NORTH. UTILITY POLE
#B1 6066 BEARS S 84° W 36 1/2 FEET.
WITNESS POST AND SIGN 2 FEET NORTH.

SKETCH

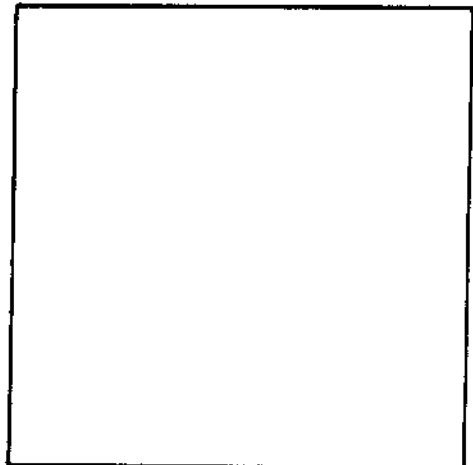

TO REACH: FROM THE INTERSECTION CO.
RD. #4 & CO. RD. #4B.3(WILD RIVER DR.
CROSSING) PROCEED EASTERLY ALONG CO.
RD. #4 TO MONUMENT ON LEFT 0.5 MILES.

VICINITY: 14.9 MILES NE OF ROSEBURG

NOTE: For Possible Further Information On This Station, Please Contact The Douglas
County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR.
97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the
Roseburg calling area dial toll free 1-800-452-0991.