


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

r-050
ROMAN 2

19S 9W 23

NAD 83 834845.85 4068090.86
43°54'43" 123°44'18"



T 19 S, R 9 W, Sec. 23

Station: Roman 2

Set By (Agency): DCSO

Date: 1970

VERTICAL CONTROL

NGVD 29 2862

Elevation: _____ NGS(USC&GS) Line # _____ USGS Line # _____

Order (Douglas-Lane Net)
Of Precision VA Agency: DCSO Proj. #: 2001 Date: 1970

HORIZONTAL CONTROL

NAD 27

Oregon State Plane Coordinates: Y(Northing) 834,880.54 X(Easting) 1,147,130.73
(South Zone)

Order (Douglas-Lane Net)
Of Precision 1/100,000 Agency: DCSO Proj. #: 2001 Date: 1970

Approximate Geographic Position: Latitude= 43° 54' 44" Longitude= 123° 44' 14"

DESCRIPTION: Station is a DCSO disk stamped "ROMAN 2 1970".

SKETCH


7/81 Station and RM3 gone; RML, RM2 intact; BLM "EC-1" loose.

For 'to reach' see current map of area.

A DCSO disk stamped "ROMAN 2 RM2 1970" bears S 81° 53' 28" W 98.48 (grid)

A DCSO disk stamped "ROMAN 2 RM1 1970" bears S 54° 25' 30" E 7.05 (grid)

A BLM disk stamped "EC-1 1967" bears S 56° 30' 48" W 13.59 (grid)

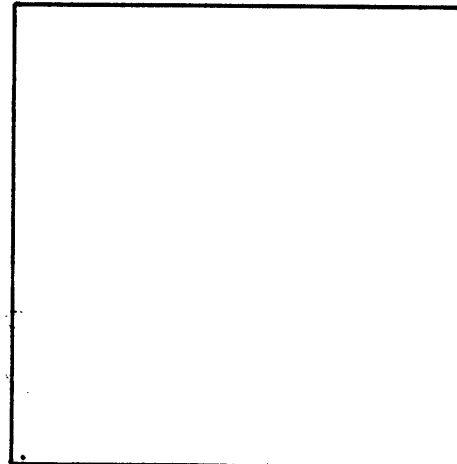

VICINITY: Roman Nose Mt.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.