


OFFICE OF THE

DOUGLAS COUNTY SURVEYOR

r-051	19S	9W	23
ROMAN 2	ECCENTRIC		
NAD	834834.64	4068047.64	
83	43°54'43"	123°44'19"	



T 19 S, R 9 W, Sec. 23

Station: Roman 2 Ecc

Set By (Agency): Lane Co. PWD

Date: 1973

VERTICAL CONTROL

NGVD 29

Elevation: 2861. NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order  
Of Precision VA Agency: LCPWD Proj. #: \_\_\_\_\_ Date: 1973

HORIZONTAL CONTROL

NAD 27

Oregon State Plane Coordinates: Y(Northing) 834,869.33 X(Easting) 1,147,087.51  
(South Zone)

Order  
Of Precision 1/50,000 Agency: LCPWD Proj. #: \_\_\_\_\_ Date: 1973

Approximate Geographic Position: Latitude= 43° 54' 44" Longitude= 123° 44' 14"


DESCRIPTION: Station is a LCPWD disk stamped  
"ROMAN 2 ECC 1973".

For 'to reach' see current map of area.

A DCSO disk stamped "ROMAN 2 RM 2 1970"  
bears S 87° 11' 15" W 54.33 (grid)  
A BLM disk stamped "EC-1 1967" bears  
N 82° 57' 22" E 32.21 (grid)

VICINITY: Roman Nose Mt.

SKETCH

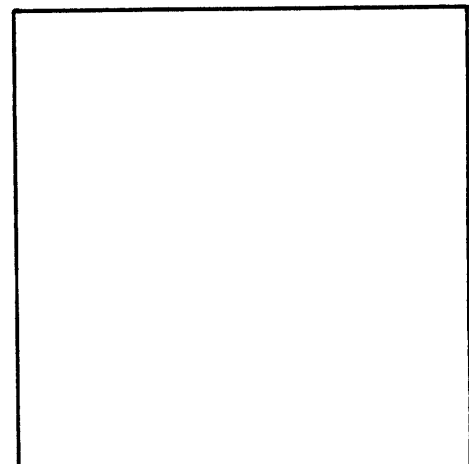

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.