OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

Station: RUNWAY T 28 S, R 6 W , Sec 27

Set By (Agency): Don Garrett L.S. #0544

Date Set: 1972

Recovered By SJF

Date Recovered May 18,1984

Recovered By

Date Recovered

Recovered By

Date Recovered

r-070 28S 6W 27
RUNWAY

NAD 83	537941.89 43° 6'22"	4149461.72 123°23'27"



VERTICAL CONTROL NGVD 29

Elevation: 1272.8 ft. NGS Line # _____ USGS Line # _____ OSHD Line # _____

Precision: V/A Agency: Don Bentz Proj. # _____ Date: 1972

HORIZONTAL CONTROL OCS 27 L.S. #0839

South Zone State Plane Coordinates: Y(Northing) 537,977.09 X(Easting) 1,228,503.41

Precision: 1/25,000 Agency: DCSO Proj. # 2005 C.S. 56/9 Date: 1972

Approximate Geographic Position: Latitude 43°06'23" Longitude 123°23'23"

DESCRIPTION and TO REACH

A 3 inch DCSO disk on a 2 inch iron pipe stamped " RUNWAY 1972 " and protruding 6 inches above the ground.

TO REACH:

From the intersection of Dole Rd. (Co.Rd.#14) and Roberts Mountain Road (Co. Rd. #123) in T29S,R6W,Sec.1, proceed approximately 2.6 miles to unpaved private road on right. (Locked gate: to obtain key, contact Roseburg Lumber.) Proceed southwesterly along unpaved private road approximately 0.65 miles to monument on right. Monument lies west of a NE/SW fenceline near top of a northwest slope.

SKETCH

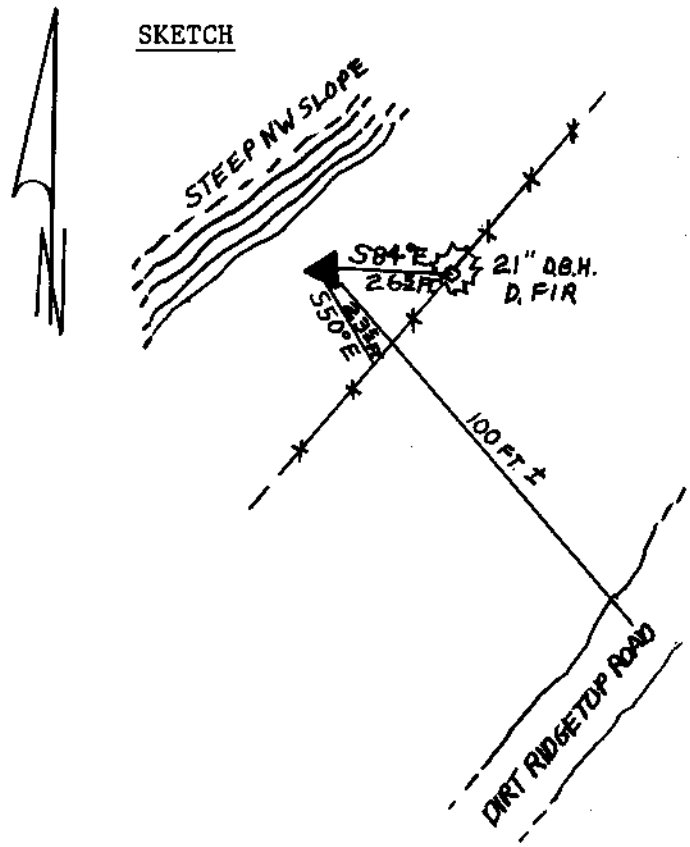

Reference Marks:

Note: For further information, contact the Douglas County Surveyor's Office, Room 205 Douglas County Justice Building, Roseburg, OR 97470. Phone 440-4278. Douglas County residents outside the Roseburg calling area, dial toll free 1-800-452-0991.