


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

S-046
SALT

22S 4W 5

NAD 745514.09 4207860.64
83 43°40'51" 123°11'50"



S-046

VERTICAL CONTROL

T 22 S, R 4W, Sec. 5

Station: SALT

Set By (Agency): DCSO

Date: 1979

Elevation: _____ NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision _____ Agency: _____ Proj. #: _____ Date: _____

HORIZONTAL CONTROL

NAD 27

Oregon State Plane Coordinates: Y(Northing) 745,548.79 X(Easting) 1,286,899.79
(South Zone)

Order
Of Precision 1/25,000 Agency: DCSO Proj. #: 2008 Date: 1979

Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: A standard brass cap set in conc.


filled bell tile 6"x39" buried 36" in the ground.

3.2 ft. east of guard rail, 9 ft. east of easterly

fogline exit #160, 4.7 ft. west of sign post/

survey marker.

SKETCH

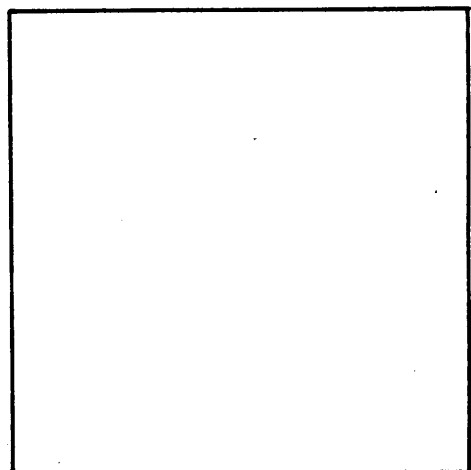

VICINITY: Approx. 100 ft. southerly of mile post

160 N. bound I-5.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.