


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

s-051 21S 12W 34
SC-2
NAD 761013.64 3965084.61
83 43°41'53" 124° 7' 0"



T 21 S, R 12W, Sec. 34
Station: SC-2
Set By (Agency): DCSO
Date: 1973

NGVD 29 S-051 VERTICAL CONTROL

Elevation: 64.123 NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision 2nd Agency: DCSO Proj. #: 2006 Date: 1973

HORIZONTAL CONTROL

NAD 27
Oregon State Plane Coordinates: Y(Northing) 761,048.69 X(Easting) 1,044,124.00
(South Zone)

Order
Of Precision 1/25,000 Agency: DCSO Proj. #: 2006 Date: 1973


Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: From intersection of Coast Hwy.

101 & U.S. Hwy.38 in Reedsport, proceed S'thly
on Hwy 101, 0.7 mi. to N. 18th St. Turn right
on N. 18th St. & go 0.1 mi. (2 blks.) to Green-
wood St. turn right on Greenwood St. and go
to its end (approx. 200'). Station on right
Standard brass cap in a drill hole in W'stly
edge of sidewalk on the E'stly side of Green-
wood St.

VICINITY: In Reedsport, W. of U.S. Hwy. 101
& S. of Scholfield Creek.

SKETCH

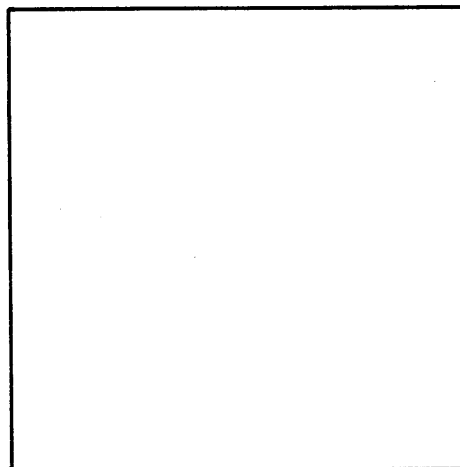

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.