


OFFICE OF THE  
DOUGLAS COUNTY SURVEYOR

s-053  
SC-4

225 12W 2

NAD 759620.09 3970209.41  
83 43°41'42" 124° 5'50"



T 22 S, R 12 W, Sec. 2

Station: SC-4

Set By (Agency): DCSO

Date: 1973

S-053

VERTICAL CONTROL NGVD 29

Elevation: 18.237 NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order (River Floodplain)  
Of Precision 2nd Agency: DCSO Proj. #: 2006 Date: 1973

HORIZONTAL CONTROL NAD 27


Oregon State Plane Coordinates: Y(Northing) 759,655.21 X(Easting) 1,049,248.75  
(South Zone)

Order (River Floodplain)  
Of Precision 1/25,000 Agency: DCSO Proj. #: 2006 Date: 1973

Approximate Geographic Position: Latitude= 43° 41' 42" Longitude= 124° 05' 45"

DESCRIPTION: A standard DCSO brass cap in  
a conc. filled bell tile 6"x36" buried  
28 in. in the ground, 10 ft. from SE end  
of railroad tressle crossing Scholfield  
Cr. 7.3 ft. Southerly of Southerly rail.  
Cap stamped "SC-4", no date.

SKETCH

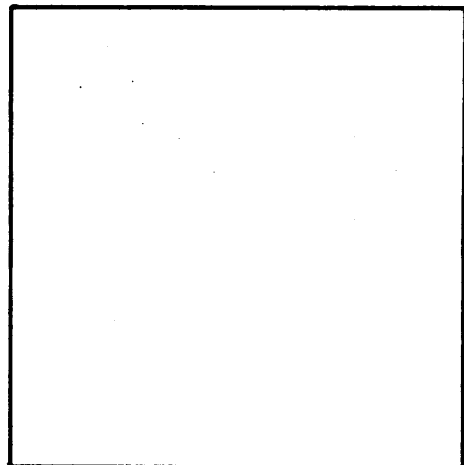

VICINITY: Approx. 3000 ft. SE'stly along

SPRR from intersection of RR and Winchester  
Ave in Reedsport.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas  
County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR.  
97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the  
Roseburg calling area dial toll free 1-800-452-0991.