


OFFICE OF THE

S-143
STUMP

31S 3W 2

DOUGLAS COUNTY SURVEYOR

NAD 465731.35 4247358.65
83 42°55' 1" 123° 0'59"



S-143

T 31 S, R 3W, Sec. 2

Station: Stump (Boat Spike)

Set By (Agency): DCSO

Date: 1975

VERTICAL CONTROL

NGVD 29

Elevation: 2683.420 NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision V.A. Agency: DCSO Proj. #: 2010-2 Date: 1975

HORIZONTAL CONTROL

OCS 27

Oregon State Plane Coordinates: Y(Northing) 465,767.58 X(Easting) 1,326,400.15
(South Zone)

Order
Of Precision 1/100,000 Agency: DCSO Proj. #: 2010-2 Date: 1975


Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: 6" spike in center of 5ft.

tree stump approx. 20 ft. W. of Rd, Station
lies in clear cut area. To reach: From Milo
Post Office go E'stly on Rd. #227 0.2 mi. to
Stout Creek Rd. turn right across bridge and
proceed 1 mi. to a sharp left turn, go lt. 2.6
mi. to intersection , take middle fork up hill
0.4 mi. to fork in road take left fork 0.6 mi
to station on lt. side of rd.

VICINITY: Approx. 3 mi. S.E. of Milo Post
Office.

SKETCH

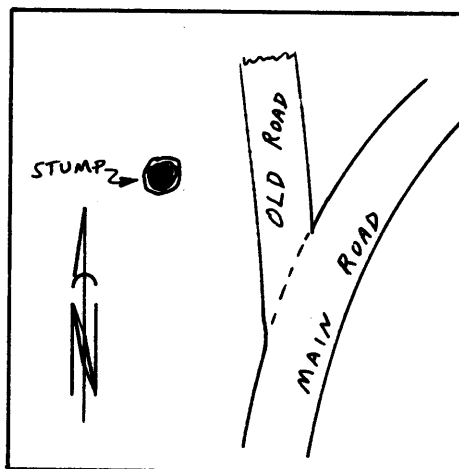

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.