


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR



S-200

T 27 S, R 4 W., Sec. 21

Station: SHAWN AZI RM 1

Set By (Agency): DCSO

Date: 1980

FB OK 2/2003

VERTICAL CONTROL

N64D 29

Elevation: 803⁷⁸ NGS(USC&GS) Line # _____ USGS Line # _____

Order Of Precision 3rd Agency: DCSO Proj. #: CS 66/63 Date: 2003

HORIZONTAL CONTROL

DCS 27


Oregon State Plane Coordinates: Y(Northing) 572,461.89 X(Easting) 1,286,418.32
(South Zone)

Order Of Precision 1/25,000 Agency: DCSO Proj. #: 2004-19 Date: 1980

Approximate Geographic Position: Latitude= 43°12' 22" Longitude= 123° 10' 37"

DESCRIPTION: A standard DCSO Brass cap set
in a conc. filled 6"x36" belltile buried
0.4 ft. above ground stamped "Shawn Azi
RM 1 1980" 80 ft. North of centerline, 2.5
ft. South of R/W fence, approx. 7 ft. higher
than asphalt.

SKETCH

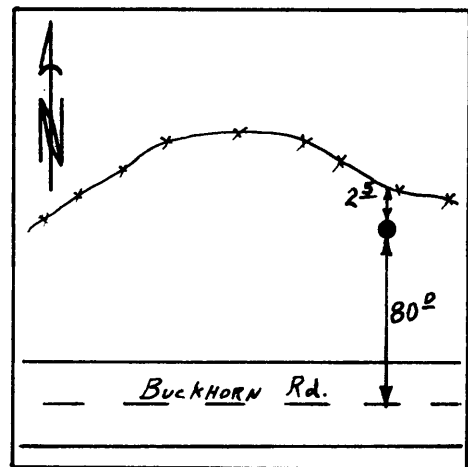

VICINITY: approx. 3.25 mi. Easterly along
Buckhorn Rd from the intersection of Buck-
horn Rd and Dixonville Rd.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.