


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

U-185
UG-74

259 70 25

NAD 527174.43 4127255.65
SS 43°20'55" 123°29' 9"



T 25 S, R 7 W, Sec. 36

Station: UW-14

Set By (Agency): DCSO

Date: 1974

VERTICAL CONTROL

Elevation: 425.301 NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision 2nd Agency: DCSO Proj. #: 2007 Date: 1991

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 627,209.46 X(Easting) 1,206,296.27
(South Zone)


Order
Of Precision 1/25,000 Agency: DCSO Proj. #: 2006 Date: 1974

Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: From P.O. at Umpqua, proceed
W'stly. 0.3 mi. to "T" intersection; go straight
on Hubbard Crk. Rd. 0.8 mi. to intersection;
go left 1.1 mi. to intersection and STA., which
is a brass cap set in a boulder, 120-ft. South
from \mathcal{E} of access road to Mode Rd.; 15-ft. East
(left) of Melrose-Umpqua Rd. \mathcal{E} ; approx. 3-ft.
higher than road \mathcal{E} .

VICINITY: Coles Valley Cemetery

SKETCH

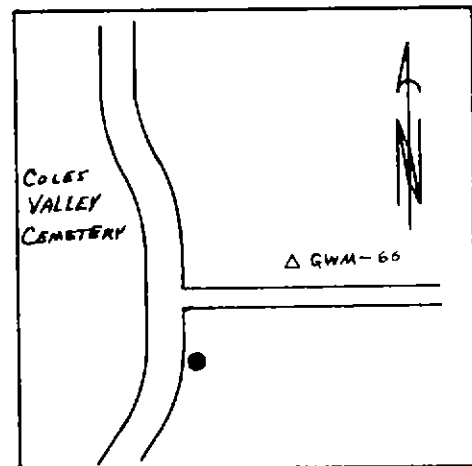

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.