

11/18/81

OFFICE OF THE

W-022

243 SW 17

WHEELER CANYON

DOUGLAS COUNTY SURVEYOR

NAD

672662.05

4172310.56

SS

43°28'40"


123°19'20"

T 24 S, R 5 W, Sec. 17

Station: WHEELER CANYON

Set By (Agency): DCSO

Date: 1977



VERTICAL CONTROL

Elevation: \_\_\_\_\_ NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order Of Precision \_\_\_\_\_ Agency: \_\_\_\_\_ Proj. #: \_\_\_\_\_ Date: \_\_\_\_\_

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 672,696.43 X(Easting) 1,251,351.24 (South Zone)


Order Of Precision 1/25,000 Agency: DCSO Proj. #: 2010-4 Date: 1978 (C.S. 59/47)

Approximate Geographic Position: Latitude= 43° 28' 41" Longitude= 123° 19' 08"

DESCRIPTION: A standard DCSO disk, stamped "WHEELER CANYON 1977". Set in a conc. filled 6"x30" sewer tile, buried 26" in the ground, approx. 4 ft. NE of an angle point in the Easterly R/W fence of I-5, 2 ft. SW of a steel fence and witness sign, 38' ft. SW of the centerline of Co. Rd. #285, on top of the first thru cut between Co. Rd. #285 and I-5, and 107 ft. NW of the North end of a guardrail.

TO REACH: From the Metz Hill interchange along I-5, proceed Northerly along Co. Rd. #285 to its junction with Co. Rd. #29, thence Northerly 0.75 mile along Co. Rd. #285 to the station on the left.

SKETCH

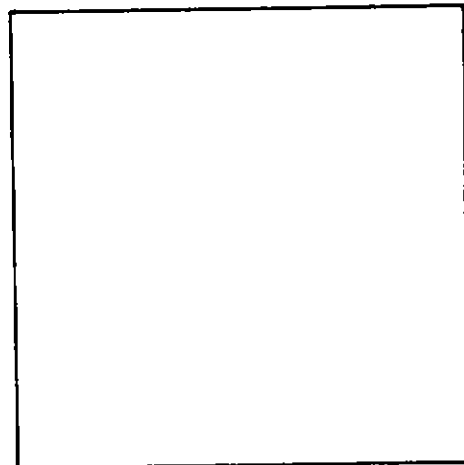

VICINITY: Along I-5, approx. 2 miles North of Metz Hill interchange.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.