


OFFICE OF THE  
DOUGLAS COUNTY SURVEYOR

N-085  
WINNIE  
NAD 83 430651.09 4143811.84  
83 43°21'26" 123°25'27"



T 25 S, R 6 W, Sec. 28

Station: WINNIE

Set By (Agency): DCSO

Date: 1980

VERTICAL CONTROL

Elevation: 432.683 NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order (Calapooya)  
Of Precision 2nd - I Agency: DCSO Proj. #: 2006 Date: 1981

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 630,685.78 X(Easting) 1,222,852.94  
(South Zone)

Order (Calapooya)  
Of Precision 1/25,000 Agency: DCSO Proj. #: 2006 Date: 1981

Approximate Geographic Position: Latitude= 43° 21' 36" Longitude= 123° 25' 22"

DESCRIPTION: Station is a standard DCSO

brass cap set in a 6"x42" conc. filled

belltile protruding 4" from the ground,

stamped "WINNIE 1980". Witness marker is

2.5' south of sta. in the fenceline;

station is S'thly 21.5 ft.  
from centerline of Co. Rd. #32, 46.2 ft.

N32°E to tele. pole #A5857, and N32°E 48.1'


to tele. box 60.

TO REACH: From intersection of Co Rds 6 & 32,  
cont. on Co Rd 32 1.55 mi. to sta. on right.

VICINITY: Approx. 1.5 miles ESE of Umpqua

store on Co Rd #32.

SKETCH

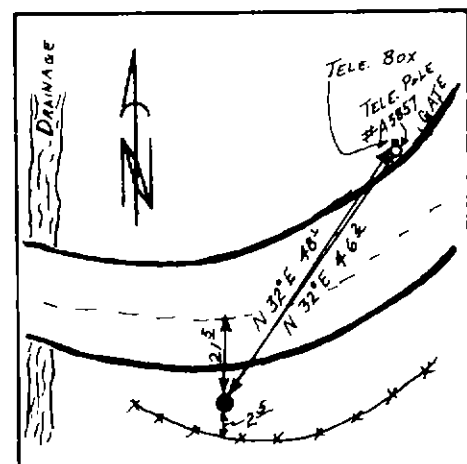

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.