

11/19/81


OFFICE OF THE

w-036  
WOLF

26S 7W 31

DOUGLAS COUNTY SURVEYOR

NAD 599106.14 4100805.47  
83 43°16' 9" 123°34'53"



T 26 S, R 7W, Sec. 31

Station: Wolf

Set By (Agency): USC&GS

Date: 1953

VERTICAL CONTROL

NGVD 29 2866

Elevation: 2865.8 NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order \_\_\_\_\_ (Douglas-Lane Net)  
Of Precision V.A. Agency: DCSO Proj. #: 2001 Date: 1970

HORIZONTAL CONTROL

OCS 27


Oregon State Plane Coordinates: Y(Northing) 599,140.91 X(Easting) 1,179,846.19  
(South Zone)

Order \_\_\_\_\_ (Douglas-Lane Net)  
Of Precision 1/100,000 Agency: DCSO Proj. #: 2001 Date: 1970

Approximate Geographic Position: Latitude= 43°16'09" Longitude= 123°34'49"

DESCRIPTION: Standard Disk set in concrete  
monument that projects 2" and is 55 ft. SW  
of the center of the lookout tower stamped  
"Wolf 1953"

SKETCH

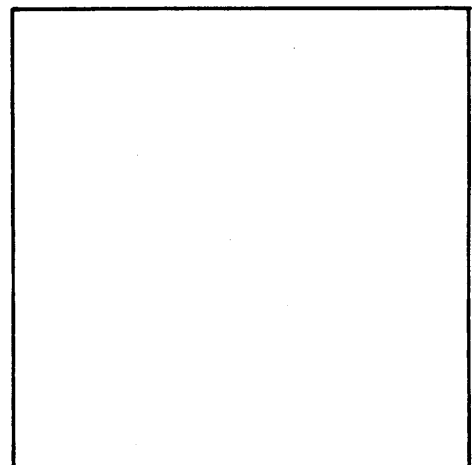

TO REACH: Beginning at Doerner Rd. (Rd. #90)  
& Callahan Rd. (Rd. #174) proceed 3.75 mi.  
to end of pavement, beginning of Co. Rd. #  
27-7-4 and end of Co. Rd. #174. Proceed  
along 27-7-4 0.8 mi. to intersection with  
26-7-19, cont. left along 27-7-4 0.1 mi. to  
intersection with 27-7-31, thence right along  
27-7-4 1 mi. to intersection with 25-8-1,  
turn right on 25-8-1. Thence cont. along  
25-8-1 0.55 mi. to dirt road on right, go  
up road on right to L.O. tower and station.

WOLF RM1 bears S 79° 32' 57" E 41.29 ft. (grid)  
WOLF RM2 bears S 7° 00' 12" E 41.86 ft. (grid)

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.