


Y-019 235 6W 27  
YELLOW RM 5

OFFICE OF THE  
DOUGLAS COUNTY SURVEYOR

NAD 698461.30 4151622.20  
83 43°32'48" 123°24'13"



T 23 S, R 6 W, Sec. 27

Station: Yellow RM 5

Set By (Agency): DCSO

Date: 1970

Y-019

VERTICAL CONTROL

NGVD 29

Elevation: 2453 NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order (Douglas-Lane)  
Of Precision VA Agency: DCSO Proj. #: 2001 Date: 1970

HORIZONTAL CONTROL

NAD 27


Oregon State Plane Coordinates: Y(Northing) 698,496.34 X(Easting) 1,230,662.22  
(South Zone)

Order (Douglas-Lane)  
Of Precision 1/100,000 Agency: DCSO Proj. #: 2001 Date: 1970

Approximate Geographic Position: Latitude= 43° 32' 48" Longitude= 123° 24' 09"

DESCRIPTION: To reach station from P.O. at Yoncalla, go W'stly on Hayhurst Rd 4.65 mi. to Skelly Rd. Go left (SW'stly) on Skelly Rd. 0.6 mi. to fork. Go right across bridge 1.55 mi. to steel gate. Pass thru gate and go 0.8 mi. to fork. Go right 1.2 mi. to fork. Go right 1.4 mi. to fork. Go left 1.8 mi. to fork. Go left 0.5 mi. to top of mountain and station.

SKETCH

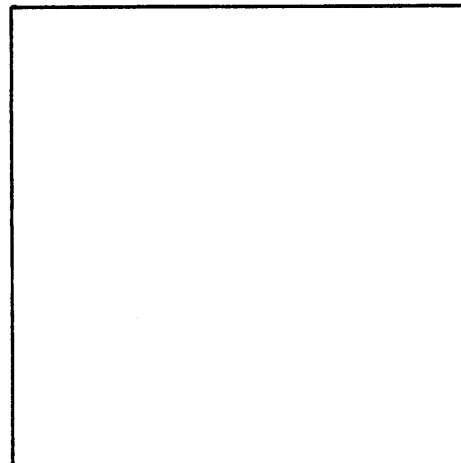

- A DCSO disk stamped "YELLOW RM 6 1970" bears N 78° 49' 07" E 65.94 (grid)
- A bronze disk stamped with a cross is Yellow 1904 and bears S 24° 50' 07" E 42.05 (grid)
- A standard disk stamped "YELLOW RM 2 1938" bears S 14° 31' 28" E 47.87 (grid)
- A standard disk stamped "YELLOW 1904 NO. 4 1970" bears N 32° 13' 28" W 28.11 (grid)
- The station YELLOW RM 5 1970 is now gone.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.