


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

P-053
PT 551+31.25

22S 4W 19

NAD 733638.98 4203594.35
83 43°38'52" 123°12'43"



T 22 S, R 4W, Sec. 19

Station: PT 551+31.25

Set By (Agency): O.S.H.D.

Date: _____

VERTICAL CONTROL

Elevation: _____ NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision _____ Agency: _____ Proj. #: _____ Date: _____

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 733,673.67 X(Easting) 1,282,633.74
(South Zone)

Order
Of Precision 1/25,000 Agency: DCSO Proj. #: 2008 Date: 1979

Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: Station mark is an Oregon St.

Hwy. Dept. Brass Cap stamped "PT 551+31.25"

set in a 10" diam. iron pipe filled with

concrete set 4" above ground and 3 1/2 ft.

Westerly of concrete curb along Westerly edge of


North bound lanes of I-5 Hwy. Station mark is

0.6 mi. North of the Cox Road overpass crossing

along I-5.

VICINITY: About 6 mi. South of Curtin.

SKETCH

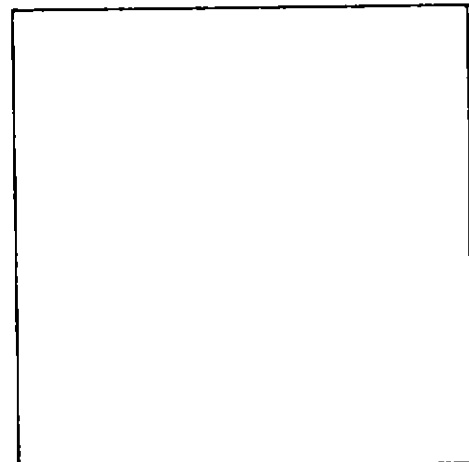

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.