


01/30/01

J-061
DRAIN

225 SW 17

OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

NAD 83 39491.23 4176544.03
43°39'41" 123°18'53"



T 22 S, R 5W, Sec. 17

Station: Drain

Set By (Agency): DCSO

Date: 1978

FD OK PER BENTZ 1995-0085 4/95
FD OK 8/00 DCSO

VERTICAL CONTROL

CORPCON 6 NAVD88 302.70 FT

Elevation: 299.09 NGS(USC&GS) Line # _____ USGS Line # _____

Order Of Precision 3rd Agency: DCSO Proj. #: _____ Date: 8/2000

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 739,526.04 X(Easting) 1,255,583.51
(South Zone)


Order Of Precision 1/15,000 Agency: DCSO Proj. #: 2008 Date: 1979
(North County)

Approximate Geographic Position: Latitude= 43° 39' 42" Longitude= 123° 18' 49"

DESCRIPTION: B.C. in drill hole in base of
R.R. signal No. 6088. From intersection of
Hwys. 38 & 99, proceed E'stly 0.15 mi. on
Hwy. 99 to SPRR. Cross tracks and turn Right
on first road, go 0.10 mi. to sta. on right.
Sta. is approx. 20' above road and 500' S'thly
along SPRR from intersection of SPRR and "B" St.
SPRR is a centerpunched bolt in the base of
signal pole #6089. (NE Bolt).

VICINITY: City of Drain, on E. side of SPRR.

SKETCH

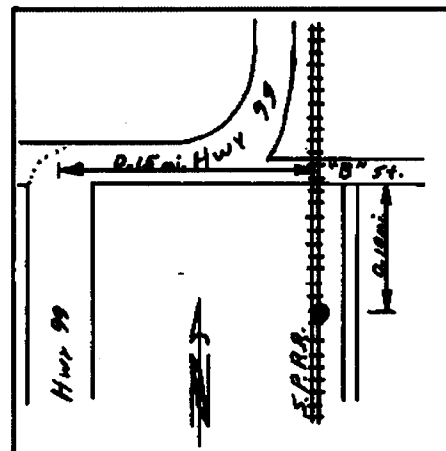

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.