


F-007

OFFICE OF THE  
DOUGLAS COUNTY SURVEYOR

F-007 228 SW 17  
F 555  
NAD 734518.54 4176455.02  
85 49439 137 125715751



T 22 S, R 5W, Sec. 17  
Station: F 555  
Set By (Agency): USC & GS  
Date: 1954

VERTICAL CONTROL

CORPCON 6 NAVD 88 315.906 FT

Elevation: 312.309 NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order  
Of Precision 1st Agency: USC & GS Proj. #: \_\_\_\_\_ Date: 1957

HORIZONTAL CONTROL


Oregon State Plane Coordinates: Y(Northing) 736,653.38 X(Easting) 1,255,694.47  
(South Zone)

Order  
Of Precision 1/15,000 Agency: DCSO Proj. #: 2008 Date: 1979

Approximate Geographic Position: Latitude= \_\_\_\_\_ Longitude= \_\_\_\_\_

DESCRIPTION: From intersection of Hwy 38 & Hwy 99 in Drain, go East along Hwy 99 approx. 0.1 mi to First St.; turn right on First St.; go 0.15 mi to covered bridge; continue 0.2 mi to trestle (go under); continue 0.1 mi to RR crossing and 0.1 mi to house. Cap is 98.9 ft. NW of NW corner of house, 29.6 ft. East of East rail, 23.5 ft. West of the most northerly of two large oak trees, 2 ft. South of witness post, 5 ft. higher than track, and set in the top of a concrete post projection 0.5 ft. above ground. A USC & GS disk stamped "F 555 1954"

SKETCH

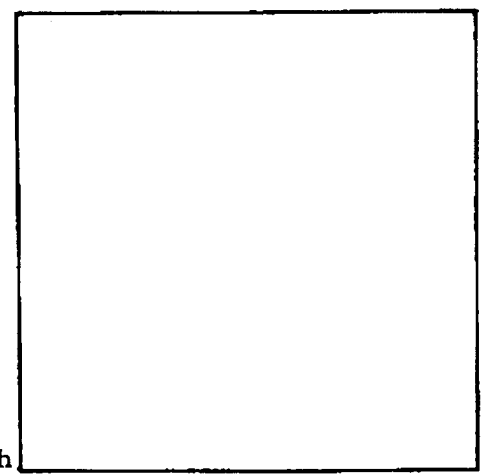

VICINITY: South of Drain City Limits= 0.8 mi. South along SPRR from old station at Drain.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.