


OFFICE OF THE

DOUGLAS COUNTY SURVEYOR

D-049  
WILLIAMS

DATE

MAP 743845.39 1137462.02  
SP 487401.07 1137462.02



T 22 S, R 6W, Sec. 7

Station: Bill

Set By (Agency): DCSO

Date: 1978

VERTICAL CONTROL

Elevation: \_\_\_\_\_ NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order  
Of Precision \_\_\_\_\_ Agency: \_\_\_\_\_ Proj. #: \_\_\_\_\_ Date: \_\_\_\_\_

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 743,684.39 X(Easting) 1,218,662.71  
(South Zone)


Order  
Of Precision 1/50,000 Agency: DCSO Proj. #: 2008 Date: 1979

Approximate Geographic Position: Latitude= \_\_\_\_\_ Longitude= \_\_\_\_\_

DESCRIPTION: B.C. stamped "Bill 1978"

set in belltile 5" below surface. Cap is  
8.9' N. of tele. pole #6-125, 28.5' S. of the  
Hwy. 38 centerline and 115' W'stly along Hwy.  
38 from road sign "22-6-7.0". Witness post  
is 8.5' S. of tele. pole.

SKETCH

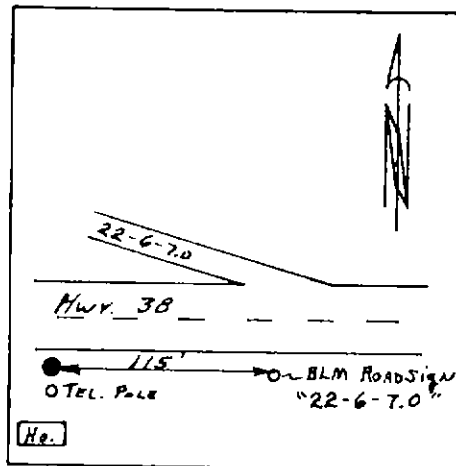

VICINITY: 7.2 mi. W'stly along Hwy. 38 from  
the intersection of Hwys. 38 and 99 in Drain.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.