

Douglas County Geodetic Data Sheet


Station: CHISELED X DCSO

Designation: C-126

T 22 R 12 S 07

Date Set: Set By (Agency): DCSO

Last Date Recovered:



VERTICAL CONTROL

NGVD 29 Elevation: Feet

Precision: Agency:

Project:

Date:

NAVD 88 Elevation: Meters

Precision: Agency:

Project:

Date:

NGS Line #

USGS Line #

OSHD Line #

File #

HORIZONTAL CONTROL

OCS 27 Y(Northing): 754,869.61 X(Easting): 1,027,718.73 Lat

Long:

Precision: 1/15,000

Agency: DCSO

Project: 2008

Date: 1980

OCS 83 Y(Northing): 754,834.60 X(Easting): 3,948,679.40 Lat: 43°40'45"

Long: 124°10'40"

Precision: Agency:

Project:

Date:

OCS 83/91 Y(Northing):

X(Easting):

Lat:

Long:

Precision: Agency:

Project:

Date:

OCS 27 Scaled Latitude: 43°40'46"

OCS 27 Scaled Longitude: 124°10'35"


DESCRIPTION:

STATION MARK IS CHISELED X IN SE CORNER OF CONCRETE PAD AT WEST END OF MOST NORTHERLY PENINSULA ON EAST SIDE OF HARBOR. THE LEGS OF THE X MEASURE APPROX 2 INCHES IN LENGTH. SEE SKETCH

COMMENTS:

FROM THE INTERSECTION OF 6TH AVE AND BEACH BLVD PROCEED NORTHERLY ALONG BEACH BLVD TO PAVED RD ON LEFT. TURN LEFT ON PENINSULA 0.10 MILES TO CONCRETE SLAB. NOTE - CANNERY; HOLIDAY CHARTERS AND SHAMROCK CHARTERS ALONG SAME PENINSULA. VICINITY - SALMON HARBOR AND WINCHESTER BAY OREGON.

SKETCH

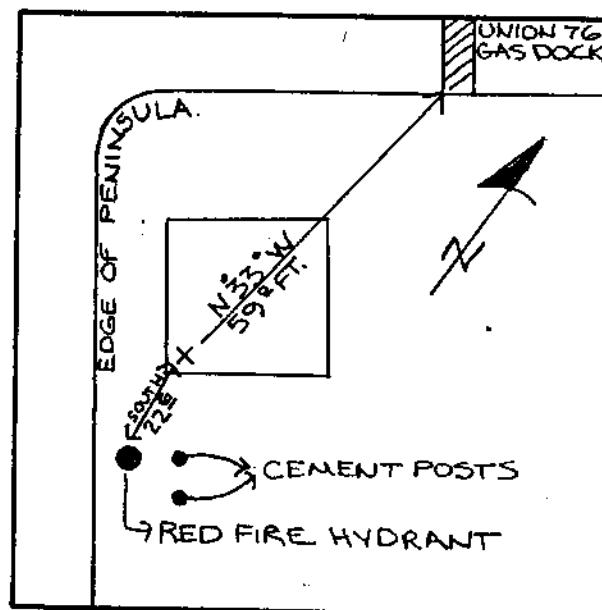

Note: For further information contact the Douglas County Surveyors Office, Room 105A Douglas County Courthouse, Roseburg, OR 97470. Phone 440-4272 or Fax (541)957-8150. Douglas County Residents outside Roseburg calling area, dial toll free 1-800-224-1619.