


OFFICE OF THE  
DOUGLAS COUNTY SURVEYOR

P-071  
PTS 101-12

22S 12W 8

NAD 752748.63 2432710.70  
SS 43°40'25" 124° 9' 41"



T 22 S, R 12 W, Sec. 8

Station: PTS 101-12

Set By (Agency): DCSO

Date: 1975

VERTICAL CONTROL

Elevation: \_\_\_\_\_ NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order  
Of Precision \_\_\_\_\_ Agency: \_\_\_\_\_ Proj. #: \_\_\_\_\_ Date: \_\_\_\_\_

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 752,983.68 X(Easting) 1,031,950.22  
(South Zone)

(T22S R12W)  
Order  
Of Precision 1/15,000 Agency: DCSO Proj. #: 6004-16 Date: 1975


Approximate Geographic Position: Latitude= 43° 40' 29" Longitude= 124° 09' 37"

DESCRIPTION: A standard DCSO brass cap set  
in a conc. filled 6"x36" bell tile buried  
flush with ground. 3.7 ft. Westerly of  
mailbox, #264, 2.5 ft. NW'ly of telephone  
box "T-793", 3.85 ft. N. of sign post,  
19.5 ft. S'ly of fog line, 80.3 ft., N 18°W  
of power pole "A 6083-14".

VICINITY: Reedsport area along Hwy 101

South approx. 2.45 mi. SW of Reedsport.

SKETCH

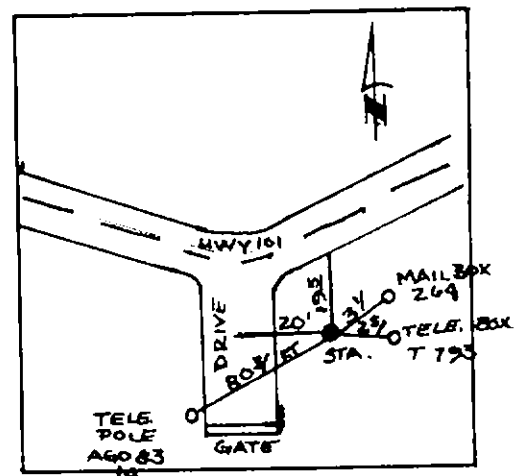

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.