


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

r-022 23S 5W 28
RANCH AZIMUTH

NAD 844478.60 4180700.27
ES 45°32'15" 129°17'54"



T 23 S, R 5 W, Sec. 28

Station: Ranch Azimuth

Set By (Agency): DCSO

Date: 1978

VERTICAL CONTROL

Elevation: _____ NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision _____ Agency: _____ Proj. #: _____ Date: _____

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 694,530.00 X(Easting) 1,259,940.37
(South Zone)


Order
Of Precision 1/25,000 Agency: DCSO Proj. #: 2010-6 Date: 1978

CS 60/23

Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: A standard DCSO brass cap marked
"Ranch Azimuth 1978" set in a concrete filled
6" x 36" sewer tile placed flush in the ground
along the N'thly shoulder of the S.B. off-
ramp from I-5 at exit #148 (Rice Hill) in
line with the N'thly prolongation of the
centerline of the first tangent section of
the freeway crossing Frontage Rd. 34 ft. N. of
the centerline of the freeway off ramp, 3 ft.
W. of a wooden sign post, 1 ft. S. of a metal
witness post and 2 ft. lower than the
roadway.

SKETCH

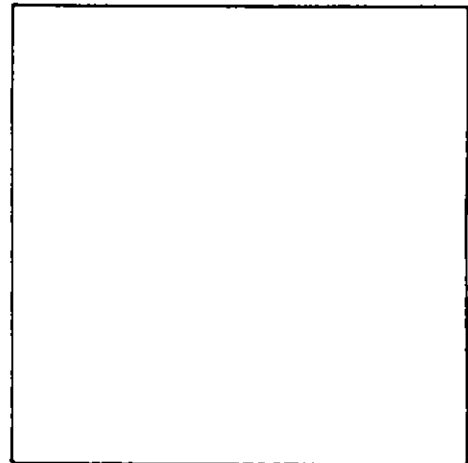

VICINITY: Vicinity of Rice Hill (Exit #148)
along I-5

NOTE: For Possible Further Information On This Station, Please Contact The Douglas
County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR.
97470 Phone 672-3311 Ext. 272. Douglas County residents outside the
Roseburg calling area dial toll free 1-800-452-0991.