



OFFICE OF THE
DOUGLAS COUNTY SURVEYOR



Station: LEE
Date Set: 7-27-93
Set By (Agency): DCSO
DCSO Designation: 1-073
Date Recovered: 3-2-93
Recovered By: RWS S.I.F. F.D. 12/31/97
Date Recovered: _____
Recovered By: _____
Date Recovered: _____
Recovered By: _____

T25S R5W Sec. 5



VERTICAL CONTROL

NGVD 29 Elevation: _____ FEET NAVD 88 Elevation: _____ METERS
NGS Line # _____ USGS LINE # _____ OSHD Line # _____ FILE # _____
Precision: _____ Agency: _____ Proj: _____ Date: _____

HORIZONTAL CONTROL


O.C.S. 27 Y(Northing): _____ O.C.S. 83 Y(Northing): 652139
(South Zone) X(Easting): _____ (South Zone) X(Easting): 4172327
Precision: G15 SCALED Agency: DCSO Proj: _____ Date: 2014
Approx. O.C.S. 27 Geographic Position: Latitude: _____ Longitude: _____
Approx. O.C.S. 83 Geographic Position: Latitude: 43° 25' 17" Longitude: 123° 19' 44"

Set: A standard NGS 3" brass cap set in a 8"x12" concrete filled bell tile protruding 2" above ground, stamped "LEE 1993". A white DCSO witness sign and post bears north 10 ft. in fence line.

To reach: From the intersection of Old Hwy. 99 N. (Co. Rd. #388) and Green Valley Rd. (Co. Rd. #23A) in T25S R5W Sec. 4 (intersection approx. 0.4 miles northerly along Hwy. 99 from intersection of Oak St. (Co. Rd. #22) in Oakland) proceed westerly along Green Valley Rd. 0.9 miles to monument on right, approx. 250 ft. easterly of Green Valley Rd. overpass of I-5.

OR

From the intersection of Rolling Ridge Rd. (Co. Rd. #76) and Green Valley Rd. (Co. Rd. #23) in T25S R6W Sec. 12 proceed northeasterly along Green Valley Rd. 2.05 miles to monument on left.

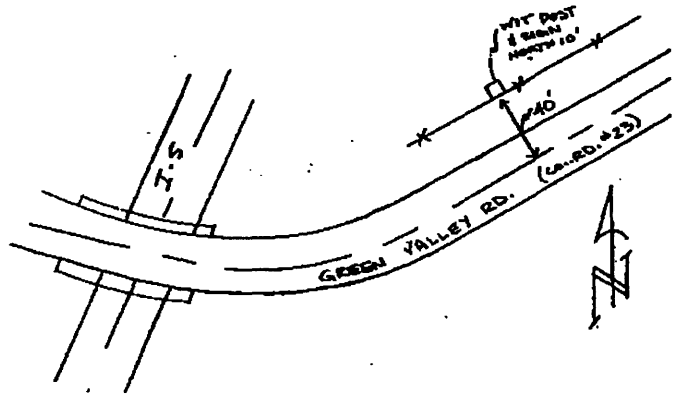

For Details see NGS website

Note: For further information contact the Douglas County Surveyors Office, Room 205 Douglas County Justice Building, Roseburg, OR 97470. Phone 440-4272. Douglas County Residents outside Roseburg calling area, dial toll free 1-800-477-0991.