


OFFICE OF THE

n-019
NATURE

205 SW 15

DOUGLAS COUNTY SURVEYOR

NAD 83 544025.65 4152583.87
43°23'51" 123°23'34"T 25 S, R 6 W, Sec. 15Station: NATURESet By (Agency): DCSODate: 1980


VERTICAL CONTROL

Elevation: 428.634 NGS(USC&GS) Line # _____ USGS Line # _____Order (Calapooya)
Of Precision 2nd - I Agency: DCSO Proj. #: 2006 Date: 1981

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 644,060.26 X(Easting) 1,231,624.85
(South Zone)Order (Calapooya)
Of Precision 1/25,000 Agency: DCSO Proj. #: 2006 Date: 1981Approximate Geographic Position: Latitude= 43° 23' 51" Longitude= 123° 23' 32"DESCRIPTION: Station mark is a standard DCSObrass cap set in conc. filled belltile 6"above ground - Cap is stamped "NATURE 1980".Witness post and sign set in random NE-SWfenceline bears West 7.5 ft., Co. Rd. r/w5/8" I.R. #60+50 bears S64°W 17 ft., Co. Rd.r/w 5/8" I.R. #59+50 bears N42°E 84.2 ft.Station mark is West 70 ft. from centerlineof Co. Rd. #77.

SKETCH

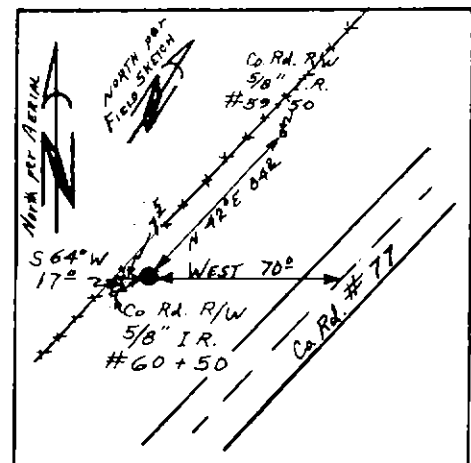VICINITY: From intersection of I-5 and Hwy 138
go West 2.4 mi. on Hwy 138 to intersection of
Hwy 138 and Co. Rd. #77. Proceed SW'ly 0.8
mi. along Co. Rd. #77 to station on right cutbank.NOTE: For Possible Further Information On This Station, Please Contact The Douglas
County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR.
97470 Phone 672-3311 Ext. 272. Douglas County residents outside the
Roseburg calling area dial toll free 1-800-452-0991.