

11/19/81


1-022
LANDER

27S 7W 5

OFFICE OF THE

DOUGLAS COUNTY SURVEYOR

NAD 591106.49 4107745.28
83 43°14'52" 123°33'15"



T 27 S, R 7 W, Sec. 5

Station: Lander

Set By (Agency): USC & GS

Date: 1942

VERTICAL CONTROL NGVD 29

Elevation: 2441.4 NGS(USC&GS) Line # _____ USGS Line # _____

Order (Roseburg Primary)
Of Precision VA Agency: DCSO Proj. #: 2002 Date: 1971

HORIZONTAL CONTROL OCS 27

Oregon State Plane Coordinates: Y(Northing) 591,141.92 X(Easting) 1,186,787.29
(South Zone)

Order (Roseburg Primary)
Of Precision 1/100,000 Agency: DCSO Proj. #: 2002 Date: 1971

Approximate Geographic Position: Latitude= 43°14'53"4 Longitude= 123°33'11"


DESCRIPTION: Beginning at the intersection
of Doerner Rd. (Co. Rd. #90) and Callahan
Rd. (Co. Rd. #174) proceed 3.75 mi. up #174
to end of pavement. Beginning of Co. Rd.
#27-7-4 and end of Co. Rd. #174. Proceed
along 27-7-4 approx. 0.6 mi. to station on
left on sandstone cliff.

LANDER RM 3 bears S 15° 20' 36" W 20.68ft. (grid)

LANDER RM 4 bears N 88° 39' 56" W 19.85ft. (grid)

VICINITY: 12 mi. W.N.W. of Roseburg.

SKETCH

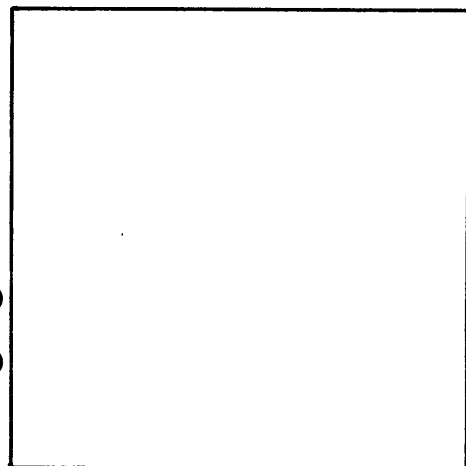

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.