


OFFICE OF THE

1-033
LENORA

28S 3E 3

DOUGLAS COUNTY SURVEYOR

NAD 552795.77 4401933.48
83 43°10' 1" 122°26'49"

T 28 S, R 3 E, Sec. 3

Station: Lenora

Set By (Agency): DCSO

Date: 1974

VERTICAL CONTROL NGVD 29

Elevation: 5916.2 NGS(USC&GS) Line # USGS Line #

Order

Of Precision VA Agency: DCSO Proj. #: 2004-8 Date: 1975

HORIZONTAL CONTROL OCS 27

Oregon State Plane Coordinates: Y(Northing) 552,832.74 X(Easting) 1,480,973.72
(South Zone)

Order


Of Precision 1/100,000 Agency: DCSO Proj. #: 2004-8 Date: 1975

Approximate Geographic Position: Latitude= Longitude=

DESCRIPTION: Brass cap set in a 4 ft x 5 ft

rock 0.2 ft. above ground (R.M.'s also set
in rock) on cut and burned part of N-S ridge.
monument is not on highest part of ridge.
To reach from the intersection of rd. no.
2739 and 2739-L (known as French Junct)
Proceed SE' stly on Rd. 2739-L 2.6 mi to
junct of Rd. 2739-L and Rd. #2716 - turn
left on to Rd #2716 and procede 1.1 mi.
to 4 wheel drive rd. on right - follow
rd. to station approx. 0.2 mi.

SKETCH

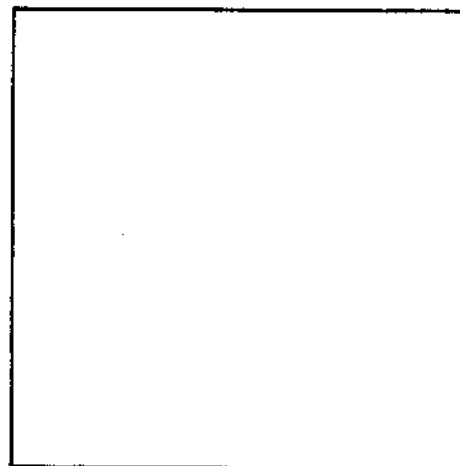VICINITY: From Hwy 138 intersection w/ rd.
no. 2739 on #2739 approx. 12 mi.NOTE: For Possible Further Information On This Station, Please Contact The Douglas
County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR.
97470 Phone 672-3311 Ext. 272. Douglas County residents outside the
Roseburg calling area dial toll free 1-800-452-0991.