OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

Station: SW Cor T 30 S, R 5 W, Sec 28

Set By (Agency): B.L.M.

Date Set: 1967

Recovered By RS,SJF

Date Recovered June 4,1984

Recovered By

Date Recovered

Recovered By

Date Recovered

300200





300-05W-28-011 30S 05W 28
SW CORNER

NAD 83	471762.52 42°55'36"	4169937.74 123°18'21"

VERTICAL CONTROL

Elevation: _____ NGS Line # _____ USGS Line # _____ OSHD Line # _____

Precision: _____ Agency: _____ Proj. # _____ Date: _____

HORIZONTAL CONTROL OCS 27

South Zone State Plane Coordinates: Y(Northing) 471,798.40 X(Easting) 1,248,979.12

Precision: 1/5,000 Agency: D.C.S.O. Proj. # 6009-8 CS 61/3 Date: 1979

Approximate Geographic Position: Latitude 42°55'36" Longitude 123°18'17"

DESCRIPTION and TO REACH

A B.L.M. disk stamped T30S S29 | S28 R5W 1967
S32 | S33

on a 2 1/2 inch iron pipe firmly set and protruding 8 inches from the ground.

TO REACH:

From the intersection of Canyonville-Riddle road (Co. Rd. #21) and the Canyonville Transfer site road (Co. Rd. #205) in T30S,R5W,Sec. 32 proceed easterly along Co. Rd. #21 approximately 0.3 miles to intersection with South Umpqua Rod and Gun Club access road on left. Proceed northerly along South Umpqua Rod and Gun Club access road approximately 0.4 miles to a "Y" intersection where a private drive leads off to left. Monument lies approximately 100 feet northerly from "Y" intersection and approximately 80 feet westerly from edge of driveway.

SKETCH

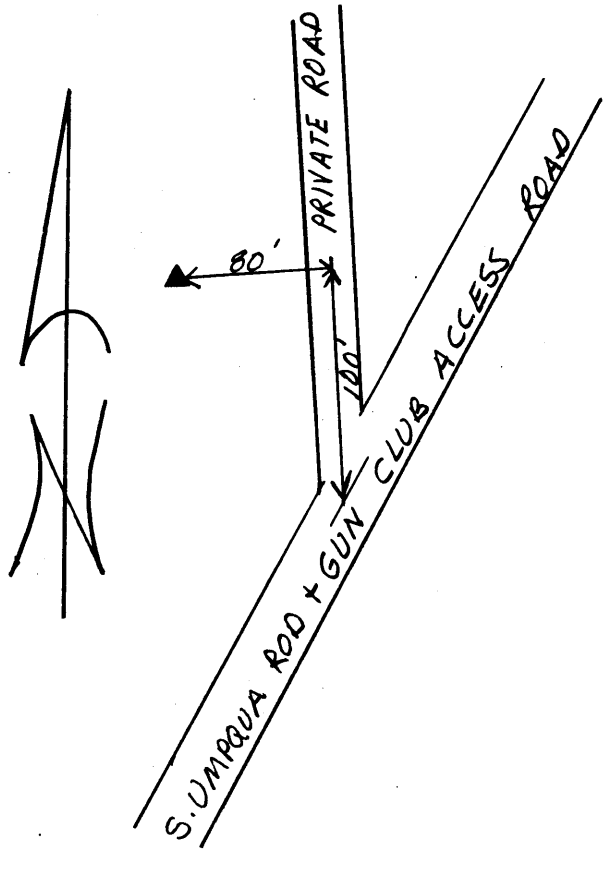

Reference Marks:

*See Douglas County Surveyor's office corner renewal records.

Note: For further information, contact the Douglas County Surveyor's Office, Room 205 Douglas County Justice Building, Roseburg, OR 97470. Phone 440-4278. Douglas County residents outside the Roseburg calling area, dial toll free 1-800-452-0991.