


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

U-098
U-96

21S 12W 16

NAD 780513.59 3962953.72
83 43°45' 5" 124° 7'41"



T 21 S, R 12 W, Sec. 16

Station: U-96

Set By (Agency): DSCO

Date: 1973

N6VD 29 U-098 VERTICAL CONTROL

Elevation: 286.4 NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision VA Agency: DCSO Proj. #: 2006 Date: 1974

HORIZONTAL CONTROL

NAD 27
Oregon State Plane Coordinates: Y(Northing) 780,548.71 X(Easting) 1,041,993.23
(South Zone)

Order
Of Precision 1/25,000 Agency: DCSO Proj. #: 2006 Date: 1973

Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: FROM THE INTERSECTION OF

COAST HWY. 101 & U.S. HWY. 38 IN REEDS-

PORT, PROCEED N'THLY ON HWY. 101, 3.8 MI.

THRU GARDINER TO A DEAD END GRAVEL RD.

ON THE LEFT, GO LEFT 0.1 MI. TO THE STA-

TION ON LEFT. STATION IS A BRASS CAP

STAMPED "U-96" SET IN CONCRETE, FLUSH


W/GROUND SURFACE; STATION OVERLOOKS

THE HORSESHOE BEND OF THE UMPQUA RIVER.

VICINITY: N. OF GARDINER OVERLOOKING

THE UMPQUA RIVER.

SKETCH

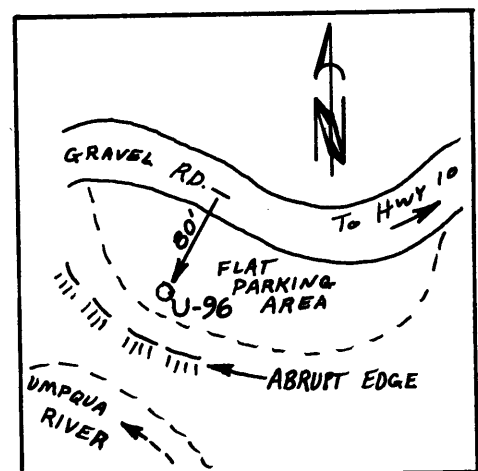

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.