


OFFICE OF THE  
DOUGLAS COUNTY SURVEYOR

P-020  
PACIFIC

223 SW 3

NAD 743563.89 4177990.45  
89 43°40'22" 123°18'36"



T 22 S, R 5 W Sec. 8

Station: PACIFIC

Set By (Agency): DCSO

Date: 1979

VERTICAL CONTROL

Elevation: \_\_\_\_\_ NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order  
Of Precision \_\_\_\_\_ Agency: \_\_\_\_\_ Proj. #: \_\_\_\_\_ Date: \_\_\_\_\_

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 743,598.73 X(Easting) 1,257,029.81  
(South Zone)

Order (North County)  
Of Precision 1/25,000 Agency: DCSO Proj. #: 2008 Date: 1979

Approximate Geographic Position: Latitude= 43°40'22" Longitude= 123°18'31"

DESCRIPTION: A standard DCSO brass cap in  
conc. filled bell tile 6"x39" buried flush  
with ground. 31 ft. West of Hwy 99 center-  
line, 22 ft. South of Southerly edge of  
driveway, 18 ft. NE of 4'x8' wooden sign


"WELCOME TO DRAIN PACIFIC GATEWAY".

Pacific Rm 1 is a brass cap in old gas pump  
island at south end. Bearing N25°36'37"E 57.69ft.  
from the monument. RM 2 is a brass cap drilled in  
conc. base of R.R. cross arm marker #6094  
(East side of tracks) and 20ft. S. of private  
R.R. crossing centerline. RM 2 bears S9°16'39"W  
256.8ft. from Pacific .

VICINITY: Northerly city limits of Drain

intersection of Hwy. 99 and Krewson St.

SKETCH

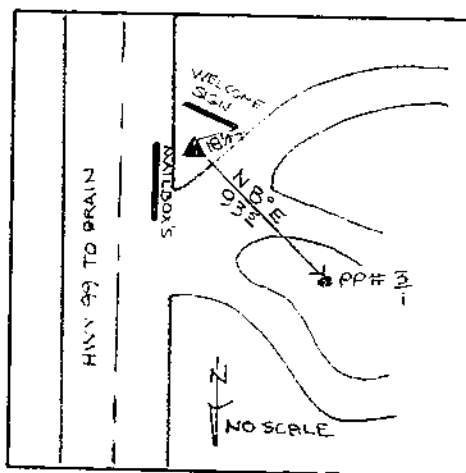

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors' Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.