


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

p-048
FOOH

ESS SW 27

NAD 83 581314.75 4149571.76
22 43°21'44" 123°24'51"



T 25 S, R 6 W, Sec. 27

Station: FOOH

Set By (Agency): DCSO

Date: 1980

VERTICAL CONTROL

Elevation: 397.814 NGS(USC&GS) Line # _____ USGS Line # _____

Order (Calapooya)
Of Precision 2nd - I Agency: DCSO Proj. #: 2006 Date: 1981

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 631,349.44 X(Easting) 1,228,612.80
(South Zone)


Order (Calapooya)
Of Precision 1/25,000 Agency: DCSO Proj. #: 2006 Date: 1981

Approximate Geographic Position: Latitude= 43° 21' 45" Longitude= 123°24'05"

DESCRIPTION: A standard DCSO brass cap set
in a conc. filled 6"x42" belltile buried 38"
in the ground; 22.0 ft. South of approx. E
Co. Rd.#32; 24.0 ft. East of private drive
to Knee residence; 9 ft. N'ly of fence; 47.7'
N57°W to Bell Tel. Co. phone box #39
LP6
TO REACH: From the intersection of Oakhill
Rd. #32 and Co. Rd. #6 proceed Easterly 2.6
mi. to mon. on right.

VICINITY: Approx. 2.5 mi. ESE from Umpqua
store.

SKETCH

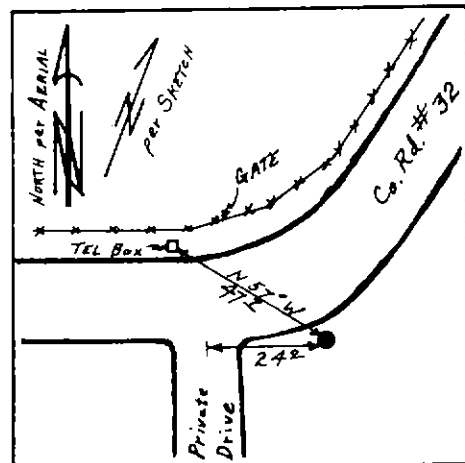

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.