


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR



S-201

T 27 S, R 4 W., Sec. 21

Station: SHAWN AZI RM 2

Set By (Agency): DCSO

Date: 1980

FD OK 02/2003

NGVD 29

VERTICAL CONTROL

Elevation: 798¹⁵ NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision 3rd Agency: DCSO Proj. #: CS66/63 Date: 2003

OCS 27

HORIZONTAL CONTROL


Oregon State Plane Coordinates: Y(Northing) 572,406.34 X(Easting) 1,286,314.02
(South Zone)

Order
Of Precision 1/25,000 Agency: DCSO Proj. #: 2004-19 Date: 1980

Approximate Geographic Position: Latitude= 43° 12' 22" Longitude= 123° 10' 39"
21.7 78.6

DESCRIPTION: A standard DCSO brass cap set
in a conc. filled 6"x36" belltile buried
0.2 ft. above ground. 9.0 ft. South of
sign post and fence, stamped "Shawn Azi RM 2
1980". 51.0 ft. North of centerline of
Buckhorn Rd. flush with pavement elev.

SKETCH

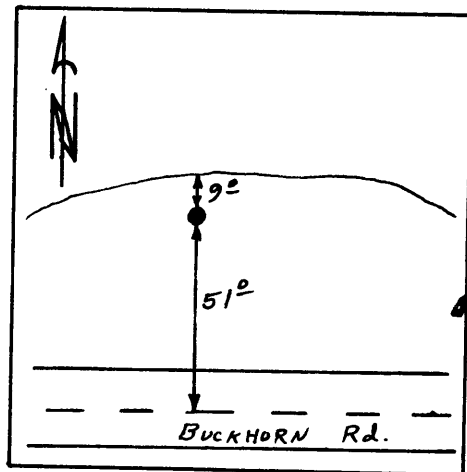

VICINITY: Approx. 3.25 mi. Easterly along Buck-
horn Rd. from the intersection of Buckhorn
Rd. and Dixonville Rd.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.