

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE
DEPENDENT RESURVEY OF A PORTION OF THE
NORTH BOUNDARY (SEVENTH STANDARD PARALLEL SOUTH),
SOUTH BOUNDARY,
SUBDIVISIONAL LINES, MINERAL SURVEY NOS. 141, 142, 197, 233, 319, AND 789,
AND SUBDIVISION OF SECTION LINES OF SECTION 21,
AND THE SUBDIVISION OF SECTIONS 2, 4, 9, 12, 22, AND 26,
TOWNSHIP 33 SOUTH, RANGE 5 WEST,
OF THE WILLAMETTE MERIDIAN,
IN THE STATE OF OREGON

EXECUTED BY

Kevin G. Mulder, Cadastral Surveyor

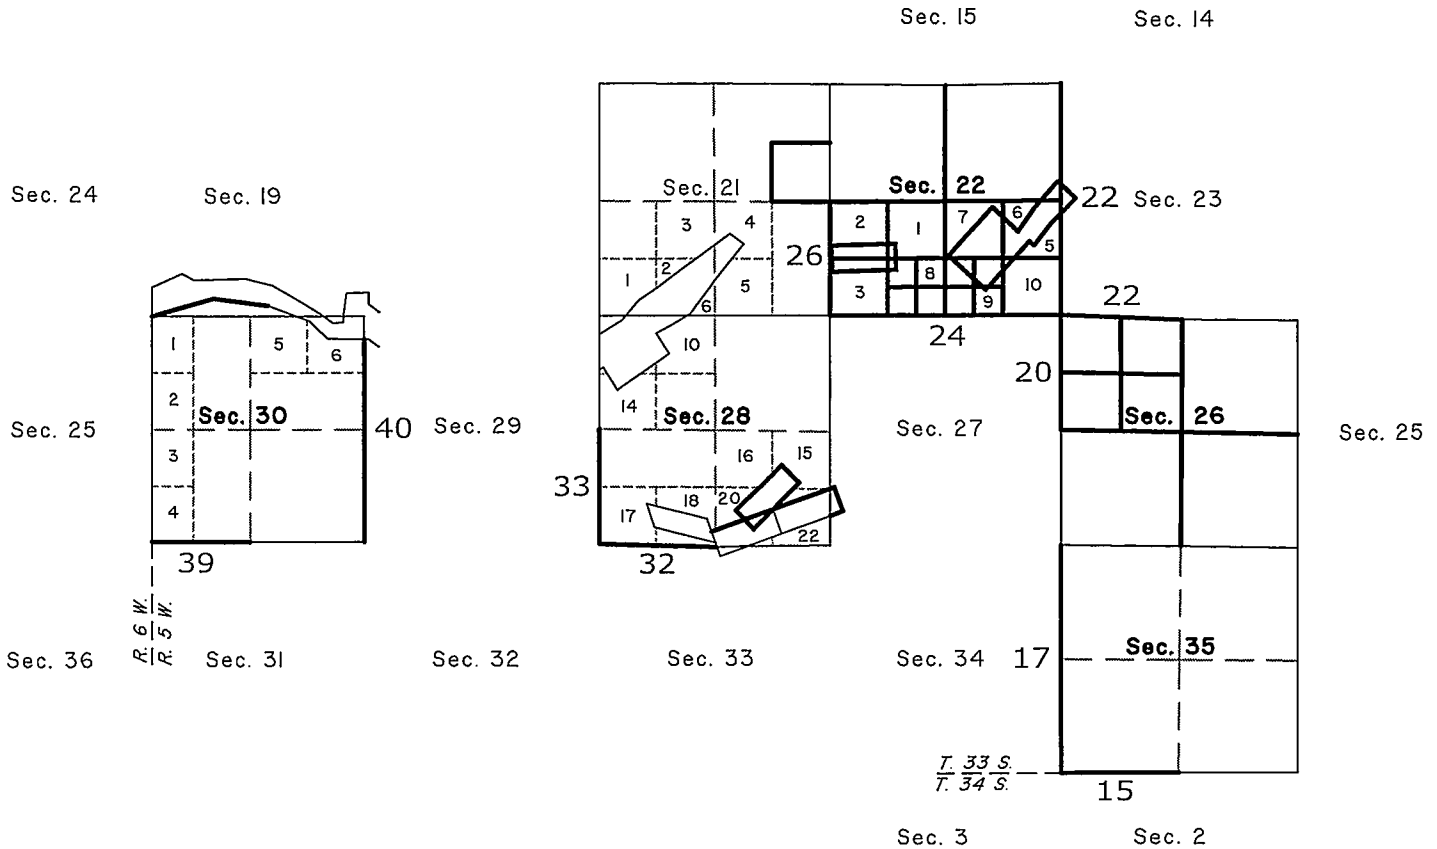
Under Special Instructions approved April 27, 2021,
which provided for the surveys included under Group No. 3006,
and Assignment Instructions dated April 27, 2021.

Survey commenced April 28, 2021

Survey completed November 29, 2022

INDEX DIAGRAM

TOWNSHIP 33 SOUTH RANGE 5 WEST



Dependent Resurvey of a Portion of Mineral Survey No. 141	Pages 42-45
Dependent Resurvey of a Portion of Mineral Survey No. 142	Pages 45-46
Dependent Resurvey of a Portion of Mineral Survey No. 197	Pages 46-49
Dependent Resurvey of a Portion of Mineral Survey No. 233	Pages 50-52
Dependent Resurvey of a Portion of Mineral Survey No. 319	Pages 52-57
Dependent Resurvey of a Portion of Mineral Survey No. 789	Pages 57-65
Dependent Resurvey of a Portion of the Subdivision of Section Lines of Section 21 ..	Pages 65-66
Subdivision of Section 22	Pages 74-79
Subdivision of Section 26	Pages 79-82

T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>The following field notes are those of the dependent resurvey of a portion of the north boundary (Seventh Standard Parallel South), south boundary, subdivisional lines, Mineral Survey Nos. 141, 142, 197, 233, 319, and 789, and subdivision of section lines of section 21, and the subdivision of sections 2, 4, 9, 12, 22, and 26, Township 33 South, Range 5 West, Willamette Meridian, Oregon.</p> <p>The history of the official surveys pertaining to this survey is as follows:</p> <p>In 1854, Butler Ives and George W. Hyde, U.S. Deputy Surveyors, surveyed the south boundary of T. 32 S., R. 5 W. (Seventh Standard Parallel South), and east boundary of T. 33 S., R. 6 W., as shown on the official plat of survey certified to be a correct copy of the original and approved November 7, 1906.</p> <p>In 1857, Sewall Truax, U.S. Deputy Surveyor, surveyed the north boundary of T. 34 S., R. 5 W., as shown on the official plat of survey approved April 10, 1858.</p> <p>In 1871, William H. Byars, U.S. Deputy Surveyor, surveyed a portion of the subdivisional lines of T. 32 S., R. 5 W., as shown on the official plat of survey approved April 26, 1872.</p> <p>In 1879, A. O. Eckelson, U.S. Deputy Surveyor, surveyed a portion of the west boundary of T. 33 S., R. 4 W., as shown in the official field notes approved June 17, 1879.</p> <p>In 1887, James S. Howard, U.S. Deputy Mineral Surveyor, surveyed Mineral Survey No. 141, as shown on the official plat of survey approved April 19, 1887.</p> <p>In 1887, James S. Howard, U.S. Deputy Mineral Surveyor, surveyed Mineral Survey No. 142, as shown on the official plat of survey approved April 19, 1887.</p> <p>In 1889, James S. Howard, U.S. Deputy Mineral Surveyor, surveyed Mineral Survey No. 197, as shown on the official plat of survey approved April 8, 1889.</p> <p>In 1891, W. F. Briggs, U.S. Deputy Mineral Surveyor, surveyed Mineral Survey No. 233, as shown on the official plat of survey approved November 16, 1891.</p> <p>In 1894, Edward F. Sharp, U.S. Deputy Surveyor, retraced a portion of the south boundary, dependently resurveyed a portion of the north boundary, and surveyed the subdivisional lines, as shown on the official plat of survey approved November 10, 1894.</p> <p>In 1896, Peter Applegate, U.S. Deputy Mineral Surveyor, surveyed Mineral Survey No. 319, as shown on the official plat of survey approved December 28, 1896.</p>

T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>A supplemental plat, showing changes in area and lottings in sections 22, 27, 28, and 33, consequent upon platting Mineral Survey Nos., 141, 142, 143, 197, and 319, as shown on the official plat approved January 29, 1897, and July 27, 1898.</p> <p>In 1901, Oscar F. Thiel, U.S. Deputy Surveyor, dependently resurveyed a portion of the south boundary and subdivisional lines, and surveyed the remainder of the subdivisional lines of T. 32 S., R. 5 W., as shown on the official plat of survey approved July 17, 1902.</p> <p>In 1902, William H. Byars, U.S. Deputy Surveyor, retraced a portion of the north boundary of T. 34 S., R. 5 W., as shown on the official plat of survey approved June 26, 1907.</p> <p>In 1916, Horace C. Hall, U.S. Deputy Mineral Surveyor, surveyed Mineral Survey No. 789, as shown on the official plat of survey approved June 20, 1916.</p> <p>In 1957, Hans W. Thielsen, Cadastral Surveyor, dependently resurveyed a portion of the subdivisional lines, as shown on the official plat of survey accepted August 7, 1958.</p> <p>In 1962, John M. Jelley and James E. Jelley, Cadastral Surveyors, remonumented certain original corner points, as described in the official field notes for T. 34 S., R. 5 W., approved September 16, 1963.</p> <p>In 1965-67, Joseph S. Gawron, John M. Jelley and Rollin D. Aanrud, Cadastral Surveyors, dependently resurveyed a portion of the north boundary and remonumented certain original corner points as shown on the official plat of survey accepted August 1, 1968.</p> <p>In 1968, Rollin D. Aanrud, Cadastral Surveyor, remonumented certain original corner points as shown in the official field notes approved August 16, 1971.</p> <p>In 1970, Lynn M. Roseberry, Cadastral Surveyor, dependently resurveyed a portion of the subdivisional lines and subdivided section 1 as shown on the official plat of survey accepted June 10, 1974.</p> <p>In 1973-74, Lynn M. Roseberry and Larry D. Evans, Cadastral Surveyors, dependently resurveyed a portion of the south boundary and remonumented certain original corner points as shown on the official plat accepted February 27, 1978.</p> <p>In 1977-80, Lynn M. Roseberry, Cadastral Surveyor, dependently resurveyed a portion of the subdivisional lines and claim lines, subdivided section 21, and remonumented certain original corner points, as shown on the official plat of survey accepted November 10, 1982.</p> <p>In 1978, Lynn M. Roseberry, Cadastral Surveyor, dependently resurveyed a portion of the east boundary and subdivisional lines of T. 33 S., R. 6 W., as shown on official plat of survey accepted May 27, 1982.</p>

T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	<p>In 1986-89, Terrence O. Nickerson, Cadastral Surveyor, dependently resurveyed a portion of the subdivisional lines, a portion of the subdivision of section lines of section 11, and certain claim lines as shown on the official plat of survey accepted June 4, 1991.</p> <p>In 1989-92, Terrence O. Nickerson, Cadastral Surveyor, dependently resurveyed a portion of the north boundary (Seventh Standard Parallel South), as shown on the official plat of survey accepted July 31, 1992.</p> <p>In 1995-96, Francis J. Simon, Cadastral Surveyor, dependently resurveyed a portion of the subdivisional lines as shown on the official plat of survey accepted September 1, 1998.</p> <p>In 2006-07, Arthur R. Rambo and Francis J. Simon, Cadastral Surveyors, dependently resurveyed a portion of the subdivisional lines of T. 32 S., R. 5 W., as shown on the official plat of survey accepted March 16, 2009.</p> <p>In 2010-11, Arthur R. Rambo, Cadastral Surveyor, resurveyed a portion of the subdivisional lines and certain claim lines of Mineral Survey No. 789, as shown on the official plat of survey accepted March 2, 2012.</p> <p>In 2012, Arthur R. Rambo, Cadastral Surveyor, dependently resurveyed a portion of the south boundary and subdivisional lines, as shown on the official plat of survey accepted February 22, 2013.</p> <p>The following local surveys filed in the Josephine County Surveyor's Office are referred to in subsequent corner descriptions and are referenced by surveyor's or engineer's last name, Professional Land Surveyor (PLS) No. or Professional Engineer (PE) No., and year.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;"><u>Date</u></th> <th style="text-align: left;"><u>Name and Registration Number</u></th> <th style="text-align: left;"><u>File Number</u></th> </tr> </thead> <tbody> <tr> <td>1953</td> <td>H.W. Lawrence, PE No. 1543</td> <td>118-53</td> </tr> <tr> <td>1968</td> <td>Thomas H. Mehl III, PLS No. 749</td> <td>C.S. Book 5, page 239</td> </tr> <tr> <td>1969</td> <td>Richard L. Templin, Jr., PE No. 3024</td> <td>117-69</td> </tr> <tr> <td>1976</td> <td>Glenn S. Baughman, PLS No. 536</td> <td>57-76</td> </tr> <tr> <td>1978</td> <td>Terrence O. Nickerson, PLS No. 1649</td> <td>302-78</td> </tr> <tr> <td>1979</td> <td>Terrence O. Nickerson, PLS No. 1649</td> <td>7-79</td> </tr> <tr> <td>1980</td> <td>Max H. Hull, PLS No. 901</td> <td>238-80</td> </tr> <tr> <td>1989</td> <td>Wallace D. Owen, PLS No. 424</td> <td>135-89</td> </tr> <tr> <td>1992</td> <td>Tallak D. Maakestad, PLS No. 2429</td> <td>73-92</td> </tr> <tr> <td>2007</td> <td>Ken W. Hoffine, PLS No. 2291</td> <td>41-2007</td> </tr> <tr> <td>2020</td> <td>William Colisch, PLS No. 2659</td> <td>9-2020</td> </tr> </tbody> </table> <p>The following local surveys filed in the Douglas County Surveyor's Office are referred to in subsequent corner descriptions and are referenced by surveyor's or engineer's last name, Professional Land Surveyor (PLS) No., Professional Engineer (PE) No., or official title, and year.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;"><u>Date</u></th> <th style="text-align: left;"><u>Name and Registration Number</u></th> <th style="text-align: left;"><u>File Number</u></th> </tr> </thead> <tbody> <tr> <td>1930</td> <td>Ben B. Irving, Douglas County Deputy Surveyor</td> <td>RM1-11</td> </tr> </tbody> </table>	<u>Date</u>	<u>Name and Registration Number</u>	<u>File Number</u>	1953	H.W. Lawrence, PE No. 1543	118-53	1968	Thomas H. Mehl III, PLS No. 749	C.S. Book 5, page 239	1969	Richard L. Templin, Jr., PE No. 3024	117-69	1976	Glenn S. Baughman, PLS No. 536	57-76	1978	Terrence O. Nickerson, PLS No. 1649	302-78	1979	Terrence O. Nickerson, PLS No. 1649	7-79	1980	Max H. Hull, PLS No. 901	238-80	1989	Wallace D. Owen, PLS No. 424	135-89	1992	Tallak D. Maakestad, PLS No. 2429	73-92	2007	Ken W. Hoffine, PLS No. 2291	41-2007	2020	William Colisch, PLS No. 2659	9-2020	<u>Date</u>	<u>Name and Registration Number</u>	<u>File Number</u>	1930	Ben B. Irving, Douglas County Deputy Surveyor	RM1-11
<u>Date</u>	<u>Name and Registration Number</u>	<u>File Number</u>																																									
1953	H.W. Lawrence, PE No. 1543	118-53																																									
1968	Thomas H. Mehl III, PLS No. 749	C.S. Book 5, page 239																																									
1969	Richard L. Templin, Jr., PE No. 3024	117-69																																									
1976	Glenn S. Baughman, PLS No. 536	57-76																																									
1978	Terrence O. Nickerson, PLS No. 1649	302-78																																									
1979	Terrence O. Nickerson, PLS No. 1649	7-79																																									
1980	Max H. Hull, PLS No. 901	238-80																																									
1989	Wallace D. Owen, PLS No. 424	135-89																																									
1992	Tallak D. Maakestad, PLS No. 2429	73-92																																									
2007	Ken W. Hoffine, PLS No. 2291	41-2007																																									
2020	William Colisch, PLS No. 2659	9-2020																																									
<u>Date</u>	<u>Name and Registration Number</u>	<u>File Number</u>																																									
1930	Ben B. Irving, Douglas County Deputy Surveyor	RM1-11																																									

T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	Date	Name and Registration Number	File Number
	1953	Norman D. Price, PLS No. 33	CS41/184
	1953	George J. Wenderoth, PLS No. 5	CS49/112
	1976	Richard L. Templin, Jr., PE No. 3024	CS58/93-3
	1987	Donald A. Bentz, PLS No. 839	M101-16
	2000	Kristian O. DeGroot, PLS No. 1941	M133-78
	2004	Max H. Hull, PLS No. 901	M144-18
	2015	Ronald A. Quimby, PLS No. 1654	M166-36
	2015	Ronald A. Quimby, PLS No. 1654	M166-39
	<p>In 1977, the Bureau of Land Management (BLM) conducted an administrative survey of a portion of the subdivisional lines and subdivided section 9, filed in the Medford District Office in Medford, Oregon.</p>		
	<p>In 1978, the BLM conducted an administrative survey of Mineral Survey No. 319, filed in the Medford District Office in Medford, Oregon.</p>		
	<p>In 1978, the BLM conducted an administrative survey of Mineral Survey No. 789, filed in the Medford District Office in Medford, Oregon.</p>		
	<p>In 1979, the BLM conducted an administrative survey of Mineral Survey Nos. 141, 142, 143, and 197, filed in the Medford District Office in Medford, Oregon.</p>		
	<p>The survey was executed in accordance with the specifications set forth in the <u>Manual of Surveying Instructions</u> (2009), and the special instructions approved April 27, 2021, for Group No. 3006, Oregon.</p>		
	<p>The directions of the lines are based on the true meridian as determined by Global Positioning System (GPS) techniques and carried forward by sustained angulation using conventional survey techniques. All measurements along the lines were derived through the use of electronic measuring equipment. Measured distances and directions have been adjusted by computer software that incorporates a least squares adjustment routine. The adjusted mean bearings and mean horizontal ground elevation distances are reported to the nearest second and 0.01 foot.</p>		
	<p>Preliminary to the resurvey the lines of the official original surveys and resurveys were retraced and search was made for all corners, lines, other calls of the record, and, where available, collateral evidence of local surveys and corners. Identified corners were perpetuated in their original positions; lost corners were reestablished and monumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.</p>		
	<p>Each new bearing tree has a 2 1/2 inch x 1/4 inch magnetic nail (Mag Nail) driven at the base on right side center and each monument established or reestablished has a magnet deposited in a white plastic case at the base of the stainless steel post, unless otherwise noted in the corner description.</p>		

T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	<p>Only those lines which bound the BLM administered land were posted with aluminum angle posts, 5 feet long, 1 inch x 1 inch, blazed, painted, and tagged with BLM boundary signs.</p> <p>The geographic position in NAD 1983 (2011) of the following corners as determined by ties from temporary GPS control points, established utilizing dual frequency, carrier phase GPS receivers, and processed using the National Geodetic Survey's Online Positioning User Service (OPUS):</p> <p>The corner of sections 2, 3, 34, and 35, on the south boundary of the township:</p> <p>Latitude: 42° 39' 07.22" N. Longitude: 123° 16' 09.20" W.</p> <p>The 1/4 section corner of sections 12 and 13:</p> <p>Latitude: 42° 42' 35.58" N. Longitude: 123° 14' 21.66" W.</p> <p>The 1/4 section corner of sections 26 and 27:</p> <p>Latitude: 42° 40' 25.96" N. Longitude: 123° 16' 09.35" W.</p> <p>The corner of sections 21, 22, 27, and 28:</p> <p>Latitude: 42° 40' 51.89" N. Longitude: 123° 17' 20.87" W.</p> <p>The corner of sections 9, 10, 15, and 16:</p> <p>Latitude: 42° 42' 36.18" N. Longitude: 123° 17' 20.53" W.</p> <p>The 1/4 section corner of sections 28 and 33:</p> <p>Latitude: 42° 39' 59.35" N. Longitude: 123° 17' 56.40" W.</p> <p>The 1/4 section corner of sections 4 and 5:</p> <p>Latitude: 42° 43' 55.46 " N. Longitude: 123° 18' 33.07" W.</p> <p>The corner of sections 29, 30, 31, and 32:</p> <p>Latitude: 42° 40' 00.35" N. Longitude: 123° 19' 44.21" W.</p> <p>The corner of sections 25, 30, 31, and 36, on the west boundary of the township:</p> <p>Latitude: 42° 40' 00.34" N. Longitude: 123° 20' 50.04" W.</p> <p>The crossing closing corner of sections 27 and 28 with line 1-2 of Dividend Quartz Lode, Mineral Survey No. 141:</p> <p>Latitude: 42° 40' 06.26" N. Longitude: 123° 17' 20.87" W.</p>
------	--

T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET

The corner of sections 19, 24, 25, and 30, identical with corner No. 1 of William Ruble Placer, Mineral Survey No. 233, on the west boundary of the township:

Latitude: 42° 40' 52.12" N. Longitude: 123° 20' 49.56" W.

The 1/4 section corner of sections 2 and 11:

Latitude: 42° 43' 28.53" N. Longitude: 123° 15' 33.69" W.

**Dependent Resurvey of a Portion of the
North Boundary (Seventh Standard Parallel South),
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

Restoring the 1854 survey by Butler Ives and George W. Hyde,
the 1894 resurvey by Edward F. Sharp,
the 1901 resurvey by Oscar F. Thiel,
the 1965-67 resurvey by Joseph S. Gawron et al.,
the 1977-80 remonumentation by Lynn M. Roseberry,
the 1989-92 resurvey by Terrence O. Nickerson,
and the 2006-07 resurvey by Arthur R. Rambo and Francis J. Simon

From the closing cor. of secs. 1 and 2, perpetuated by Irving, Douglas County Deputy Surveyor, in 1930; subsequently reported by Roseberry in 1970; and perpetuated by the Douglas County Surveyor's Office in 1985, filed under C.S. Files 62/25-9; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.

T 32 S	
S 35	

S 2	S 1
T 33 S R 5 W	
CC	
1965	

from which a bearing tree mkd. by Irving, not reported by Roseberry

A fir, 42 ins. diam., bears S. 35° W., 29.8 ft. dist., with a healed blaze.

and the remains of bearing trees reported by Roseberry

A rotted fir stump, size indeterminate, bears N. 85° E., 35.6 ft. dist., no marks visible. (Original)

A fir, 28 ins. diam., bears S. 14° E., 20.8 ft. dist., with a healed blaze.

and accessories established by the Douglas County Surveyor's Office

Dependent Resurvey of a Portion of the
North Boundary (Seventh Standard Parallel South),
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
1345.05	<p>An iron rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, N. 85° 35' 37" E., 89.59 ft. dist., with an aluminum cap mkd. DOUGLAS CO. SURVEYOR BO2.</p> <p>A rotted ponderosa pine stump, size indeterminate, bears N. 34° W., 51.8 ft. dist., no marks visible. The bridge spike set in the stump by the Douglas County Surveyor's Office was not recovered.</p> <p>N. 89° 42' 28" W., bet. secs. 2 and 35.</p> <p>The E 1/16 sec. cor. of sec. 2 only, established by Irving, Douglas County Deputy Surveyor, in 1930, and is accepted as the cor.; monumented with an iron pipe, 1 1/2 ins. diam., firmly set, projecting 6 ins. above the ground.</p> <p>At the corner point</p> <p>Drive an iron rod, 30 ins. long, 5/8 in. diam., 29 ins. inside the iron pipe, with aluminum cap mkd.</p> <hr style="width: 10%; margin: 10px auto;"/> <p style="text-align: center;">E 1/16 S 2 2021</p> <p>from which new accessories</p> <p>A wooden utility pole, bears S. 41° E., 91.1 ft. dist., with metal tag mkd. Pacificorp 01333005027900. Drive a Mag Nail at the base on right side center.</p> <p>A live oak, 14 ins. diam., bears S. 40 3/4° W., 40.8 ft. dist., mkd. E 1/16 S2 BT.</p> <p>The cor. is located at the top of a cut bank on the N. side of a gravel road, 12 ft. wide, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 37' 18" W., beginning new measurement.</p>
1037.71	<p>The standard 1/4 sec. cor. of sec. 35 only, T., 32 S., R. 5 W., determined at record dists. from the remains of bearing trees reported by Gawron et al., in 1965-67</p> <p>A cedar, 25 ins. diam., bears N. 31 3/4° E., 65.3 ft. dist., with a healed blaze. (Record, N. 43° E.)</p> <p>A rotted fir stump, size indeterminate, bears S. 52° E., 46.9 ft. dist., no marks visible. (Original)</p> <p>A fir, 31 ins. diam., bears N. 73° W., 114.8 ft. dist., with a healed blaze. (Record, N. 74° W.)</p>

**Dependent Resurvey of a Portion of the
North Boundary (Seventh Standard Parallel South),
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p>A fir, 24 ins. diam., bears N. 41° W., 48.8 ft. dist., with a healed blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 34 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">SC T 32 S R 5 W 1/4 S 35 ----- 2021</p> <p>and a new reference monument</p> <p>An iron rod, 30 ins. long, 5/8 in. diam., set 28 ins. in the ground, bears N. 20° 48' 49" W., 49.30 ft. dist., with aluminum cap mkd. RM SC 1/4 S35 49.30 FT TO COR 2021 and an arrow pointing to the cor.</p> <p>The cor. is located in a gravel road, 18 ft. wide, bears S. 45° E. and N. 45° W. The iron post set by Gawron et al., in 1965-67 was not recovered.</p> <p style="text-align: center;">-----</p> <p>N. 89° 32' 06" W., beginning new measurement.</p>
307.34	<p>The 1/4 sec. cor. of sec. 2 only, established by Irving, Douglas County Deputy Surveyor, in 1930; perpetuated by the Douglas County Surveyor's Office in 1967, under C.S. File 53/52-13, and again in 1980, under C.S. File 61/11-10; subsequently perpetuated by Quimby, PLS No. 1654, in 2015, filed in the Douglas County Surveyor's Office under M166-39; and is accepted as the cor.; monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above a mound of stone, 3 ft. base, 12 ins. high, with brass cap mkd.</p> <p style="text-align: center;">COUNTY SURVEYORS OFFICE T 32 S 1/4 ----- S 2 T 33 S R 5 W 1967</p> <p>from which the remains of a bearing tree mkd. by Irving</p> <p>A rotted fir stump, size indeterminate, bears S. 0 1/2° W., 48.7 ft. dist., no marks visible.</p> <p>and the remains of a bearing tree mkd. by the Douglas County Surveyor's Office in 1967</p> <p>A madrone snag, 6 ins. diam., bears S. 69° W., 15.6 ft. dist., with a healed double blaze.</p> <p>and bearing trees mkd. by the Douglas County Surveyor's Office in 1980</p>

Dependent Resurvey of a Portion of the
North Boundary (Seventh Standard Parallel South),
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>A fir, 16 ins. diam., bears N. 41 3/4° E., 71.5 ft. dist., with a healed blaze.</p> <p>A fir, 22 ins. diam., bears N. 74 3/4° W., 34.9 ft. dist., with a healed blaze.</p> <p>and bearing trees mkd. by Quimby</p> <p>A fir, 6 ins. diam., bears S. 43 3/4° E., 16.9 ft. dist., with illegible scribe marks visible on partially healed blaze.</p> <p>A fir, 9 ins. diam., bears S. 19° W., 12.2 ft. dist., with no marks visible on partially healed blaze.</p> <hr/> <p>N. 89° 48' 13" W., beginning new measurement.</p>
1347.98	<p>The W 1/16 sec. cor. of sec. 2 only, established by Templin, PE No. 3024, in 1976; perpetuated by Quimby, PLS No. 1654, in 2015, filed in the Douglas County Surveyor's Office under M166-39; and is accepted as the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, in a collar of stone, with yellow plastic cap mkd. TEMPLIN RE 3024, from which the remains of bearing trees mkd. by Templin</p> <p>A sugar pine snag, 28 ins. diam., bears S. 4 1/2° E., 23.7 ft. dist., with a healed double blaze.</p> <p>A fir stump, 37 ins. diam., bears S. 45 1/4° W., 42.0 ft. dist., no marks visible.</p> <p>and a bearing tree mkd. by Quimby</p> <p>A fir, 6 ins. diam., bears S. 70 1/2° E., 18.2 ft. dist., with a healed blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, directly over the iron rod, in a collar of stone, with brass cap mkd.</p> <hr/> <p>W 1/16 S 2 2021</p> <p>and a new bearing tree</p> <p>A fir, 11 ins. diam., bears S. 39 1/2° W., 14.6 ft. dist., mkd. W 1/16 S2 BT.</p> <hr/> <p>N. 89° 46' 45" W., beginning new measurement.</p>
1013.18	<p>The cor. of secs. 34 and 35 only, T., 32 S., R. 5 W., reported by Thiel in 1904; perpetuated by Irving, Douglas County Deputy Surveyor, in 1930; subsequently perpetuated by the Douglas County Surveyor's Office in 1967, under C.S. File 53/52-23; and further perpetuated by Quimby, PLS No. 1654, in 2015, filed in</p>

Dependent Resurvey of a Portion of the
North Boundary (Seventh Standard Parallel South),
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>the Douglas County Surveyor's Office under M166-36; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 14 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">COUNTY SURVEYORS OFFICE T 32 S R 5 W S 34 S 35 ----- CC T 33 S 1967</p> <p>from which a bearing tree reported by Thiel and bark scribed by Irving</p> <p style="padding-left: 40px;">A fir, 24 ins. diam., bears N. 23° E., 16.5 ft. dist., with a healed blaze and illegible scribe marks visible on bark.</p> <p>and a bearing tree mkd. by the Douglas County Surveyor's Office</p> <p style="padding-left: 40px;">A fir, 20 ins. diam., bears N. 20° W., 23.5 ft. dist., with a healed blaze.</p> <p>and bearing trees mkd. by Quimby</p> <p style="padding-left: 40px;">A fir, 7 ins. diam., bears S. 31 1/4° E., 4.9 ft. dist., with illegible scribe marks visible on partially healed blaze.</p> <p style="padding-left: 40px;">A fir, 19 ins. diam., bears S. 16 1/4° W., 14.8 ft. dist., with illegible scribe marks visible on partially healed blaze.</p> <p>From this cor., the closing cor. of secs. 2 and 3, perpetuated by Irving, Douglas County Deputy Surveyor, in 1930; subsequently perpetuated by the Douglas County Surveyor's Office in 1967, under C.S. File 53/52-19; and further perpetuated by Quimby, PLS No. 1654, in 2015, filed in the Douglas County Surveyor's Office under M166-36; bears S. 89° 40' 48" W. 334.18 ft. dist.; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 16 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">COUNTY SURVEYORS OFFICE T 32 S CC ----- S 3 S 2 T 33 S R 5 W 1967</p> <p>from which the remains of an original bearing tree</p> <p style="padding-left: 40px;">A fir stump, 21 ins. diam., bears N. 70° E., 21.8 ft. dist., with a healed blaze. This tree was mkd. again by Irving in 1930.</p> <p>and bearing trees mkd. by the Douglas County Surveyor's Office</p>

Dependent Resurvey of a Portion of the
North Boundary (Seventh Standard Parallel South),
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>A cedar, 19 ins. diam., bears S. 18 1/2° E., 48.3 ft. dist., with scribe marks 3S 5W visible on partially healed blaze.</p> <p>A fir, 30 ins. diam., bears S. 37 1/4° W., 21.5 ft. dist., with a healed blaze.</p> <p>and bearing trees mkd. by Quimby</p> <p>A fir, 5 ins. diam., bears N. 27 1/4° E., 14.5 ft. dist., with a healed blaze.</p> <p>A madrone, 8 ins. diam., bears N. 19 1/2° W., 19.0 ft. dist., with illegible scribe marks visible on partially healed blaze.</p>
	<hr/>
	<p>From Angle Point No. 2 bet. secs. 4 and 33, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, with top 6 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">AP 2 T 32 S R 5 W S 33</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">S 4 T 33 S 1980</p>
	<p>from which the remains of bearing trees reported by Roseberry</p> <p>A hemlock, 29 ins. diam., bears S. 11 1/2° W., 66.3 ft. dist., with a healed blaze.</p> <p>A rotted fir snag, size indeterminate, bears S. 51° W., 47.5 ft. dist., with scribe marks 33S R5W visible on open blaze. (Original)</p> <p>and a new bearing tree</p> <p>A fir, 9 ins. diam., bears N. 34 1/4° W., 16.6 ft. dist., mkd. AP2 S33 BT.</p> <p>N. 89° 54' 00" W., on the N. bdy. of T. 33 S., R. 5 W.</p>
<p>97.71</p>	<p>From this point, the closing cor. of secs. 32 and 33, T., 32 S., R. 5 W., perpetuated by Wenderoth, PLS No. 5, in 1953; subsequently perpetuated by the Douglas County Surveyor's Office in 1967, under C.S. File 53/52-49, bears North, 4.43 ft. dist.; monumented with an axle, 1 in. diam., firmly set, projecting 5 ins. above the ground, from which the remains of an original bearing tree</p> <p>A rotted fir stump, size indeterminate, bears N. 61° E., 21.8 ft. dist., no marks visible.</p> <p>and a bearing tree mkd. by Wenderoth</p>

Dependent Resurvey of a Portion of the
North Boundary (Seventh Standard Parallel South),
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>A maple, 18 ins. diam., bears N. 26 1/4° W., 42.3 ft. dist., with a healed blaze.</p> <p>and bearing trees mkd. by the Douglas County Surveyor's Office</p> <p>A fir, 30 ins. diam., bears N. 23 1/2° E., 20.8 ft. dist., with a healed blaze.</p> <p>A fir, 32 ins. diam., bears N. 0 3/4° W., 17.2 ft. dist., with a healed blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the axle, with brass cap mkd.</p> <div style="text-align: center;"> <p>CC</p> <p>T 32 S R 5 W</p> <p>S 32 S 33</p> <hr style="width: 100px; margin: 0 auto;"/> <p>S 4</p> <p>T 33 S R 5 W</p> <p>2021</p> </div>
419.02	<p>The original closing cor. of secs. 4 and 5, hereinafter described.</p> <hr/>
1002.06	<p>S. 89° 54' 00" W., bet. secs. 5 and 32.</p> <p>The E 1/16 sec. cor. of sec. 32 only, T., 32 S., R. 5 W., established by Bentz, PLS No. 839, in 1987; and is accepted as the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, with yellow plastic cap mkd. BENTZ SUR. INC., from which bearing trees mkd. by Bentz</p> <p>A fir, 27 ins. diam., bears N. 67 3/4° W., 21.7 ft. dist., with a healed double blaze.</p> <p>A hemlock, 17 ins. diam., bears N. 2 3/4° W., 14.7 ft. dist., with a healed double blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <div style="text-align: center;"> <p>E 1/16</p> <p>S 32</p> <hr style="width: 100px; margin: 0 auto;"/> <p>2021</p> </div> <p>From this cor., a point erroneously established as the E 1/16 sec. cor. of sec. 32 only, T., 32 S., R. 5 W., by Hull, PLS No. 901, in 2004; bears S. 12° 32' 47" W., 0.86 ft. dist. This point was not correctly positioned and was not accepted for the cor. or utilized for control in the course of this survey; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 4 ins. above</p>

Dependent Resurvey of a Portion of the
North Boundary (Seventh Standard Parallel South),
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>the ground, with yellow plastic cap mkd. HULL RS901; from which the bearing trees mkd. by Hull</p> <p>A chinquapin, 13 ins. diam., bears S. 77 3/4° E., 14.9 ft. dist., with illegible scribe marks visible on partially healed double blaze.</p> <p>A chinquapin, 25 ins. diam., bears S. 35 1/4° E., 6.1 ft. dist., with a healed double blaze.</p> <p>From this same cor., a point established by person(s) unknown, for an unknown purpose, bears N. 21° 55' 04" E., 22.50 ft. dist.; monumented with an iron pipe, 1 in. diam., firmly set, projecting 6 ins. above the ground, and was not utilized for control in the course of this survey.</p>
1323.89	<p>N. 89° 58' 52" W., bet. secs. 5 and 32.</p> <p>Point for the 1/4 sec. cor. of sec. 32 only, T., 32 S., R. 5 W., at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 32 S R 5 W 1/4 S 32</p> <hr style="width: 10%; margin: 0 auto;"/> <p>T 33 S R 5 W 2021</p> </div> <p>from which</p> <p>A hemlock, 13 ins. diam., bears N. 48 3/4° E., 32.4 ft. dist., mkd. 1/4 S32 BT.</p> <p>A hemlock, 3 ins. diam., bears N. 26 3/4° W., 20.6 ft. dist., mkd. X at breast height and BT at the base.</p>
3887.47	<p>The Angle Point bet. secs. 5 and 32, reported by Nickerson in 1989-92, monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 32 S R 5 W AP S 32</p> <hr style="width: 10%; margin: 0 auto;"/> <p>S 5 T 33 S 1989</p> </div> <p>from which the remains of bearing trees reported by Nickerson</p>

Dependent Resurvey of a Portion of the
North Boundary (Seventh Standard Parallel South),
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET

A rotted fir stump, size indeterminate, bears S. 41° E., 66.0 ft. dist., no marks visible.

A hemlock, 12 ins. diam., bears S. 30 1/2° E., 12.5 ft. dist., with a healed blaze.

A fir stump, 16 ins. diam., bears N. 30 1/4° W., 7.6 ft. dist., with a healed blaze.

and a new bearing tree

A fir, 5 ins. diam., bears N. 40 1/2° W., 13.2 ft. dist., mkd. X at breast height and BT at the base.

From this cor., the closing cor. of secs. 31 and 32, T., 32 S., R. 5 W., reported by Rambo and Simon in 2006-07, bears N. 89° 21' 01" W., 83.67 ft. dist.; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.

COUNTY SURVEYORS OFFICE

T 32 S R 5 W

S 31 | S 32

S 5

T 33 S R 5 W

1958

from which the remains of bearing trees reported by Rambo and Simon

A fir, 20 ins. diam., bears N. 39 1/2° E., 29.7 ft. dist., with a healed blaze.

A rotted fir stump, 36 ins. diam., bears N. 43° E., 37.6 ft. dist., no marks visible. (Original)

A fir, 16 ins. diam., bears N. 39 1/2° W., 15.0 ft. dist., with a healed blaze.

A quartz stone, 6 x 8 ins., projecting 4 ins. above the ground, and an iron pipe, 1 1/2 ins. diam., projecting 11 ins. above the ground, are both found alongside the iron post.

Dependent Resurvey of a Portion of the South Boundary,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p style="text-align: center;">Restoring the 1857 survey by Sewall Truax, the 1894 survey by Edward F. Sharp, the 1902 retracement by William H. Byars, the 1962 remonumentation by John M. Jelley and James E. Jelley, the 1973-74 resurvey by Lynn M. Roseberry and Larry D. Evans, and the 2012 resurvey by Arthur R. Rambo</p> <hr style="width: 20%; margin: auto;"/> <p>Beginning at the 1/4 sec. cor. of secs. 2 and 35, reported by Rambo in 2012, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 33 S R 5 W S 35 1/4 ——— S 2 T 34 S R 5 W 1962</p> </div> <p>from which the remains of bearing trees reported by Rambo</p> <p>A fir, 28 ins. diam., bears S. 54° E., 16.5 ft. dist., with a healed blaze.</p> <p>A cedar, 39 ins. diam., bears S. 69° W., 44.9 ft. dist., with illegible scribe marks visible on partially healed blaze. (Original)</p> <p>A fir, 12 ins. diam., bears N. 38 1/4° W., 13.2 ft. dist., with a healed double blaze.</p> <p>A madrone stump, 18 ins. diam., bears N. 13° W., 5.3 ft. dist., no marks visible.</p> <p>S. 89° 40' 02" W., bet. secs. 2 and 35.</p>
2689.25	<p>The cor. of secs. 2, 3, 34, and 35, reported by Roseberry and Evans in 1973- 74, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 33 S R 5 W S 34 S 35 ——— ——— S 3 S 2 T 34 S 1962</p> </div> <p>from which the remains of bearing trees reported by Roseberry and Evans</p> <p>A cedar, 20 ins. diam., bears N. 62 1/2° E., 115.9 ft. dist., with a healed blaze. (Record, 114.8 ft.)</p> <p>A fir snag, 26 ins. diam., bears N. 72 3/4° E., 63.0 ft. dist., with no marks visible on rotted blaze.</p>

**Dependent Resurvey of a Portion of the South Boundary,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	<p>A cedar, 16 ins. diam., bears S. 71 1/4° E., 55.8 ft. dist., with a healed blaze.</p> <p>A fir snag, 20 ins. diam., bears S. 15 1/2° E., 64.7 ft. dist., with no marks visible on rotted blaze.</p> <p>A cedar, 38 ins. diam., bears S. 80 3/4° W., 82.5 ft. dist., with scribe marks 4S R5W S3 BT visible on partially healed blaze.</p> <p>A cedar, 17 ins. diam., bears N. 50 1/4° W., 177.5 ft. dist., with a healed blaze.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of a Portion of the Subdivisional Lines, T. 33 S., R. 5 W., Willamette Meridian, Oregon</p> <hr/> <p style="text-align: center;">Restoring the 1894 survey by Edward F. Sharp, the 1957 resurvey by Hans W. Thielsen, the 1965-67 remonumentation by Joseph S. Gawron et al., the 1968 remonumentation by Rollin D. Aanrud, the 1973-74 remonumentation by Lynn M. Roseberry and Larry D. Evans, the 1977-80 resurvey by Lynn M. Roseberry, the 1986-89 resurvey by Terrence O. Nickerson, the 1995-96 resurvey by Francis J. Simon, and the 2010-11 resurvey by Arthur R. Rambo</p> <hr style="width: 20%; margin: auto;"/> <p>From the 1/4 sec. cor. of secs. 12 and 13, reported by Roseberry and Evans in 1973-74, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 33 S R 5 W S 12 1/4 ——— S 13 1974</p> </div> <p>from which the remains of bearing trees reported by Roseberry and Evans</p> <p>A fir, 39 ins. diam., bears N. 53 1/2° E., 17.2 ft. dist., with a healed blaze.</p> <p>A fir, 25 ins. diam., bears S. 43° E., 20.5 ft. dist., with a healed blaze. (Original)</p> <p>A fir snag, 13 ins. diam., bears N. 9° W., 6.6 ft. dist., with scribe marks 1/4 S visible on open blaze. (Original)</p> <p>S. 89° 05' 41" W., bet. secs. 12 and 13.</p>
1333.74	Point for the W 1/16 sec. cor. of secs. 12 and 13.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>S 12 W 1/16 ——— S 13 2021</p> </div> <p>from which</p> <p>A fir, 8 ins. diam., bears N. 35 3/4° E., 24.9 ft. dist., mkd. W 1/16 S12 BT.</p> <p>A fir, 4 ins. diam., bears S. 72 1/4° E., 11.7 ft. dist., mkd. X at breast height and BT at the base.</p>
2667.48	<p>The cor. of secs. 11, 12, 13, and 14, reported by Rambo in 2010-11, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 33 S R 5 W S 11 S 12 ————— ————— S 14 S 13 1967</p> </div> <p>from which the remains of bearing trees reported by Rambo</p> <p>A cedar snag, 29 ins. diam., bears N. 51 1/4° E., 37.0 ft. dist., with scribe marks 3 S 12 BT visible on partially healed blaze. (Original)</p> <p>A fir, 20 ins. diam., bears N. 57° E., 37.5 ft. dist., with a healed blaze.</p> <p>A fir, 46 ins. diam., bears S. 21 1/2° E., 51.5 ft. dist., with a healed blaze. (Original)</p> <p>A cedar, 35 ins. diam., bears S. 17° W., 47.5 ft. dist., with illegible scribe marks visible on partially healed blaze. (Original)</p> <p>A fir snag, 29 ins. diam., bears N. 11 1/4° W., 76.9 ft. dist., with scribe marks 3S 5W BT visible on partially healed blaze. (Record, N. 17° W., 78.5 ft.)</p> <p>The cor. is located at the base of a rock bluff, 45 ft. high., base bears SE and NW.</p> <hr/> <p>From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp.</p> <p>N. 0° 26' 54" W., bet. secs. 34 and 35.</p>
1319.85	<p>The S 1/16 sec. cor. of secs. 34 and 35, established by Nickerson, PLS No. 1649, in 1979; and is accepted as the cor.; monumented with an iron rod,</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>5/8 in. diam., firmly set, projecting 2 ins. above the ground, from which bearing trees mkd. by Nickerson</p> <p>A fir, 24 ins. diam., bears S. 28 1/4° E., 9.9 ft. dist., with a healed blaze. Add scribe marks S 1/16 S35 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p>A cedar, 26 ins. diam., bears N. 19° W., 7.3 ft. dist., with no marks visible on partially healed blaze. Add scribe marks S 1/16 S34 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the iron rod, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S 1/16 S 34 S 35 2021</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 26' 41" W., beginning new measurement.</p>
1319.10	<p>The 1/4 sec. cor. of secs. 34 and 35, reported by Gawron et al., in 1965-67, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W 1/4 S 34 S 35 1967</p> <p>from which bearing trees reported by Gawron et al.</p> <p>A fir, 30 ins. diam., bears S. 41° E., 5.9 ft. dist., with a healed blaze. (Original)</p> <p>A madrone, 20 ins. diam., bears N. 23° W., 19.1 ft. dist., with a healed blaze. (Original)</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 10' 57" W., beginning new measurement.</p>
1328.29	<p>The N 1/16 sec. cor. of secs. 34 and 35, established by Nickerson, PLS No. 1649, in 1979; and is accepted as the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, in collar of stone, from which the remains of bearing trees mkd. by Nickerson</p> <p>A fir, 21 ins. diam., bears S. 29° E., 55.4 ft. dist., with a healed blaze. Add scribe marks N 1/16 S35 BT on new blaze and drive a Mag Nail at the base on right side center.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	<p>A rotted fir stump, 42 ins. diam., bears N. 25 3/4° W., 24.3 ft. dist., with a healed blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, directly over the iron rod, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>N 1/16 S 34 S 35 2021</p> </div> <p>and a new bearing tree</p> <p>A fir, 10 ins. diam., bears S. 42 1/2° W., 18.3 ft. dist., mkd. X at breast height and BT at the base.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 10' 21" W., beginning new measurement.</p>
1327.99	<p>The cor. of secs. 26, 27, 34, and 35, reported by Gawron et al., in 1965-67; perpetuated by the Josephine County Surveyor's Office in 2009, recorded in C.S. Book 10, page 264; monumented with an iron post, 1 1/2 ins. diam., firmly set, with top 3 ins. below the surface of a gravel road, with brass cap mkd.</p> <div style="text-align: center;"> <p>COUNTY SURVEYOR T 33 S R 5 W S 27 S 26 ----- S 34 S 35 2009</p> </div> <p>from which the remains of accessories reported by Gawron et al.</p> <p>A fir snag, 40 ins. diam., bears N. 71° E., 48.2 ft. dist., with illegible scribe marks visible on open blaze. (Original)</p> <p>An iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, in a collar of stone, bears S. 52° 54' 21" E., 49.50 ft. dist., with brass cap mkd. RM T33S R5W RM S35 RM 1966 and an arrow pointing to the cor. (Record, S. 52 1/2° E.)</p> <p>A rotted fir stump, 30 ins. diam., bears S. 52° W., 50.8 ft. dist., no marks visible. (Original)</p> <p>A rotted fir stump, 32 ins. diam., bears S. 58° W., 51.5 ft. dist., with scribe marks T33S R5W S34 BT visible on open blaze.</p> <p>A rotted fir stump, 30 ins. diam., bears N. 74° W., 57.4 ft. dist., no marks visible.</p> <p>and bearing trees mkd. by the Josephine County Surveyor's Office</p>

**Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p>A fir, 13 ins. diam., bears S. 56 1/2° E., 24.2 ft. dist., with a healed double blaze.</p> <p>A fir, 14 ins. diam., bears N. 65 3/4° W., 43.9 ft. dist., with a healed double blaze.</p> <p>and a new bearing tree</p> <p>A fir, 19 ins. diam., bears S. 39° W., 20.6 ft. dist., mkd. X at breast height and BT at the base.</p> <p>The cor. is located in a gravel road, 12 ft. wide, bears S. 15° E. and N. 15° W.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 26 and 27, reported by Gawron et al., in 1965-67, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd.</p> <p align="center">T 33 S R 5 W 1/4 S 27 S 26 1966</p> <p>from which bearing trees reported by Gawron et al.</p> <p>A fir, 32 ins. diam., bears S. 47° E., 63.4 ft. dist., with a healed blaze.</p> <p>A yew, 11 ins. diam., bears S. 29 1/4° W., 35.3 ft. dist., with scribe marks 1/4 S27 BT visible on partially healed blaze. (Record, S. 31° W.)</p> <p>N. 0° 46' 24" W., bet. secs. 26 and 27.</p>
1142.29	<p>An original line tree, a fir, 48 ins. diam., mkd. with 2 notches on the N. and S. sides. This now becomes an angle point; from which new reference monuments</p> <p>An iron rod, 24 ins. long, 5/8 in. diam., set 23 ins. in the ground, bears N. 58° 26' 33" E., 14.10 ft. dist., with aluminum cap mkd. RM AP S26 14.10 FT TO COR 2021 and an arrow pointing to the cor.</p> <p>An iron rod, 24 ins. long, 5/8 in. diam., set 23 ins. in the ground, bears N. 47° 54' 45" W., 14.90 ft. dist., with aluminum cap mkd. RM AP S27 14.90 FT TO COR 2021 and an arrow pointing to the cor.</p> <hr/> <p>N. 0° 28' 05" E., beginning new measurement.</p>
180.03	<p>The N 1/16 sec. cor. of secs. 26 and 27, established by Nickerson, PLS No. 1649, in 1978; and is accepted as the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, from which bearing trees mkd. by Nickerson</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	<p>A live oak, 8 ins. diam., bears N. 17° E., 11.9 ft. dist., with no marks visible on partially healed blaze. Add scribe marks X at breast height and BT at the base on new blazes and drive a Mag Nail at the base on right side center.</p> <p>A fir, 23 ins. diam., bears N. 74 1/4° W., 46.1 ft. dist., with a healed blaze. Add scribe marks N 1/16 S27 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto;"> <tr><td>N 1/16</td></tr> <tr><td>S 27 S 26</td></tr> <tr><td>2021</td></tr> </table> <hr style="width: 20%; margin: 5px auto;"/> </div> <p>N. 0° 23' 17" E., beginning new measurement.</p>	N 1/16	S 27 S 26	2021							
N 1/16											
S 27 S 26											
2021											
1288.97	<p>The cor. of secs. 22, 23, 26, and 27, reported by Gawron et al., in 1965-67; perpetuated by the Josephine County Surveyor's Office in 2014, recorded in C.S. Book 11, page 278; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto;"> <tr><td>T 33 S</td><td>R 5 W</td></tr> <tr><td>S 22</td><td>S 23</td></tr> <tr><td colspan="2"><hr style="width: 100%;"/></td></tr> <tr><td>S 27</td><td>S 26</td></tr> <tr><td colspan="2">1967</td></tr> </table> </div> <p>from which the remains of bearing trees reported by Gawron et al.</p> <p>A rotted fir stump, size indeterminate, bears N. 61° E., 34.3 ft. dist., with scribe mark B visible on open blaze. (Original)</p> <p>A fir, 53 ins. diam., bears S. 74° E., 29.7 ft. dist., with a healed blaze and a spike at the base on left side center.</p> <p>A fir, 45 ins. diam., bears S. 66° W., 17.8 ft. dist., with a healed blaze and a spike at the base on left side center. (Original)</p> <p>A fir, 39 ins. diam., bears N. 68 3/4° W., 39.6 ft. dist., with a healed blaze and a spike at the base on right side center. (Original) (Record, N. 66 1/2° W.)</p> <p>and a bearing tree mkd. by the Josephine County Surveyor's Office</p> <p>A fir, 32 ins. diam., bears N. 21 3/4° E., 29.4 ft. dist., with a healed double blaze and a spike at the base on right side center.</p> <hr style="width: 100%; margin-top: 10px;"/>	T 33 S	R 5 W	S 22	S 23	<hr style="width: 100%;"/>		S 27	S 26	1967	
T 33 S	R 5 W										
S 22	S 23										
<hr style="width: 100%;"/>											
S 27	S 26										
1967											

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>From the 1/4 sec. cor. of secs. 23 and 26, reported by Simon in 1995-96, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W S 23 1/4 _____ S 26 1974</p> <p>from which bearing trees reported by Simon</p> <p style="padding-left: 40px;">A fir, 42 ins. diam., bears S. 3° W., 77.2 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A live oak, 20 ins. diam., bears N. 10 1/4° W., 69.0 ft. dist., with a healed blaze. (Record, N. 9 1/4° W.)</p> <p>N. 87° 40' 01" W., bet. secs. 23 and 26.</p>
1070	Gravel road, 16 ft. wide, bears N. 60° E. and S. 60° W.
1371.77	<p>The W 1/16 sec. cor. of secs. 23 and 26, established by Nickerson, PLS No. 1649, in 1978; and is accepted as the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, from which bearing trees mkd. by Nickerson</p> <p style="padding-left: 40px;">A fir, 25 ins. diam., bears N. 1° E., 15.2 ft. dist., with a healed blaze. Add scribe marks W 1/16 S23 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p style="padding-left: 40px;">A fir, 23 ins. diam., bears S. 82 3/4° W., 18.3 ft. dist., with a healed blaze. Add scribe marks X at breast height and BT at the base on new blazes and drive a Mag Nail at the base on right side center.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <p style="text-align: center;">S 23 W 1/16 _____ S 26 2021</p> <p style="text-align: center;">_____</p> <p>N. 87° 39' 23" W., beginning new measurement.</p>
1371.44	<p>The cor. of secs. 22, 23, 26, and 27.</p> <p style="text-align: center;">_____</p> <p>N. 0° 12' 12" E., bet. secs. 22 and 23.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
1328.97	Point for the S 1/16 sec. cor. of secs. 22 and 23. Not monumented.
2381.45	<p>Intersect line 6-1 of G. & A. Lode, Mineral Survey No. 789.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 30 ins. in the ground, with aluminum cap mkd.</p> <div data-bbox="812 504 1006 714" style="text-align: center;"> </div>
2657.94	<p>The cor. is located in a gravel road, 12 ft. wide, bears S. 40° E. and N. 40° W.</p> <p>The 1/4 sec. cor. of secs. 22 and 23, reported by Rambo in 2010-11, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.</p> <div data-bbox="812 924 1006 1050" style="text-align: center;"> </div> <p>from which bearing trees reported by Rambo</p> <ul style="list-style-type: none"> A fir, 34 ins. diam., bears S. 24 1/4° E., 56.8 ft. dist., with a healed blaze. (Original) A cedar, 20 ins. diam., bears S. 52 3/4° W., 19.4 ft. dist., with a healed blaze. A ponderosa pine, 30 ins. diam., bears N. 39° W., 38.3 ft. dist., with a healed blaze. (Original) <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 15' 49" W., beginning new measurement.</p>
412.30	<p>Intersect line 1-2 of G. & A. Lode, Mineral Survey No. 789.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 19 ins. in the ground, with aluminum cap mkd.</p> <div data-bbox="812 1638 1006 1869" style="text-align: center;"> </div>

**Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET 2656.80	<p>The cor. of secs. 14, 15, 22, and 23, reported by Gawron et al., in 1965-67; perpetuated by the Josephine County Surveyor's Office in 2014, recorded in C.S. Book 11 page 280; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">T 33 S</td> <td style="padding: 0 5px;">R 5 W</td> </tr> <tr> <td style="padding: 0 5px;">S 15</td> <td style="padding: 0 5px;">S 14</td> </tr> <tr> <td colspan="2" style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; height: 1px;"></td> </tr> <tr> <td style="padding: 0 5px;">S 22</td> <td style="padding: 0 5px;">S 23</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">1967</td> </tr> </table> </div> <p>from which the remains of bearing trees reported by Gawron et al.</p> <ul style="list-style-type: none"> A fir, 29 ins. diam., bears N. 59 1/2° E., 25.7 ft. dist., with a healed blaze and a spike at the base on right side center. (Record, N. 57° E.) A cedar, 33 ins. diam., bears S. 54 1/2° E., 40.3 ft. dist., with a healed double blaze and a spike at the base on left side center. (Original) (Record, S. 57° E.) A fir snag, 23 ins. diam., bears S. 44 1/2° W., 32.6 ft. dist., with a healed double blaze. (Original) (Record, S. 41 1/2° W., 33.7 ft.) A cedar, 42 ins. diam., bears S. 86 1/4° W., 42.9 ft. dist., with a healed blaze and a spike at the base on left side center. (Record, S. 81° W.) A fir, 22 ins. diam., bears N. 59 3/4° W., 43.9 ft. dist., with a healed blaze and a spike at the base on right side center. (Record, N. 64° W.) A rotted fir stump, 24 ins. diam., bears N. 56° W., 33.0 ft. dist., with a healed blaze. (Original) (Record, N. 60° W.) <hr style="border: 0.5px solid black; margin: 10px 0;"/> <p>From the cor. of secs. 22, 23, 26, and 27.</p> <p>N. 89° 26' 33" W., bet. secs. 22 and 27.</p>	T 33 S	R 5 W	S 15	S 14			S 22	S 23	1967	
T 33 S	R 5 W										
S 15	S 14										
S 22	S 23										
1967											
1326.44	Point for the E 1/16 sec. cor. of secs. 22 and 27. Not monumented.										
1989.66	<p>Point for the W-E 1/64 sec. cor. of secs. 22 and 27.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">S 22</td> </tr> <tr> <td style="padding: 0 5px;">W-E 1/64</td> </tr> <tr> <td style="padding: 0 5px;">S 27</td> </tr> <tr> <td style="padding: 0 5px;">2021</td> </tr> </table> </div> <p>from which</p>	S 22	W-E 1/64	S 27	2021						
S 22											
W-E 1/64											
S 27											
2021											

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	<p>A fir, 8 ins. diam., bears N. 6 1/2° E., 16.6 ft. dist., mkd. X at breast height and BT at the base.</p> <p>A fir, 8 ins. diam., bears S. 63 1/2° E., 10.1 ft. dist., mkd. WE 1/64 S27 BT.</p>
2652.88	<p>The 1/4 sec. cor. of secs. 22 and 27, reported by Roseberry and Evans in 1973-74, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W S 22 1/4 ——— S 27 1974</p> <p>from which the remains of bearing trees reported Roseberry and Evans</p> <p>A cedar stump, 17 ins. diam., bears S. 8° E., 10.2 ft. dist., with a healed blaze.</p> <p>A decayed pine stump, size indeterminate, bears S. 18 1/2° W., 56.8 ft. dist., with no marks visible on exposed blaze. (Original)</p> <p>A ponderosa pine, 21 ins. diam., bears N. 31° W., 27.7 ft. dist., with a healed blaze.</p> <p>and a new bearing tree</p> <p>A cedar, 13 ins. diam., bears S. 42 1/2° W., 8.7 ft. dist., mkd. 1/4 S27 BT.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 45' 48" W., beginning new measurement.</p>
671.36	<p>Point for the E-W 1/64 sec. cor. of secs. 22 and 27.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S 22 E-W 1/64 S 27 2021</p> <p>from which</p> <p>A fir, 13 ins. diam., bears N. 35° E., 22.2 ft. dist., mkd. X at breast height and BT at the base.</p> <p>A fir, 16 ins. diam., bears S. 2 1/4° E., 31.1 ft. dist., mkd. EW 1/64 S27 BT.</p>
1342.72	<p>Point for the W 1/16 sec. cor. of secs. 22 and 27. Not monumented.</p>

**Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET											
2685.44	<p>The cor. of secs. 21, 22, 27, and 28, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T 33 S</td> <td>R 5 W</td> </tr> <tr> <td>S 21</td> <td>S 22</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td>S 28</td> <td>S 27</td> </tr> <tr> <td colspan="2">1967</td> </tr> </table> </div> <p>from which the remains of bearing trees reported by Roseberry</p> <p>A madrone, 17 ins. diam., bears N. 45° E., 36.3 ft. dist., with a healed blaze. (Original)</p> <p>A madrone snag, 16 ins. diam., bears S. 40° E., 13.5 ft. dist., with a healed blaze. (Original) (Record, 14.5 ft.)</p> <p>A cedar, 30 ins. diam., bears S. 87° W., 34.3 ft. dist., with a healed blaze. (Original)</p> <p>A fir, 23 ins. diam., bears N. 54° W., 20.5 ft. dist., with a healed blaze. (Original)</p> <p>and a new bearing tree</p> <p>A fir, 19 ins. diam., bears S. 56 3/4° E., 29.4 ft. dist., mkd. T33S R5W S27 BT.</p>	T 33 S	R 5 W	S 21	S 22			S 28	S 27	1967	
T 33 S	R 5 W										
S 21	S 22										
S 28	S 27										
1967											
	<hr/> <p>N. 0° 04' 14" W., bet. secs. 21 and 22.</p>										
1321.71	<p>Point for the S 1/16 sec. cor. of secs. 21 and 22. Not monumented.</p>										
2643.42	<p>The 1/4 sec. cor. of secs. 21 and 22, reported by Roseberry in 1977-80; perpetuated by the Josephine County Surveyor's Office in 2016, recorded in C.S. Book 12, page 50; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T 33 S</td> <td>R 5 W</td> </tr> <tr> <td colspan="2">1/4</td> </tr> <tr> <td>S 21</td> <td>S 22</td> </tr> <tr> <td colspan="2">1968</td> </tr> </table> </div> <p>from which the remains of bearing trees reported by Roseberry</p> <p>A black oak, 23 ins. diam., bears S. 41° E., 37.6 ft. dist., with a healed blaze. (Original)</p> <p>A cedar, 22 ins. diam., bears S. 10° E., 23.1 ft. dist., with a healed blaze and a spike at the base on right side center.</p>	T 33 S	R 5 W	1/4		S 21	S 22	1968			
T 33 S	R 5 W										
1/4											
S 21	S 22										
1968											

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	<p>A ponderosa pine snag, 16 ins. diam., bears S. 88 1/2° W., 26.4 ft. dist., with a healed blaze.</p> <p>and bearing trees mkd. by the Josephine County Surveyor's Office</p> <p>A fir, 14 ins. diam., bears S. 85 1/4° E., 16.7 ft. dist., with illegible scribe marks visible on partially healed double blaze and a spike at the base on left side center.</p> <p>A fir, 7 ins. diam., bears N. 52 3/4° W., 16.7 ft. dist., with illegible scribe marks visible on partially healed double blaze and a spike at the base on left side center.</p> <hr/> <p>From the cor. of secs. 9, 10, 15, and 16, perpetuated by Mehl, PLS No. 749, in 1968; and subsequently perpetuated by the Josephine County Surveyor's Office in 1988, recorded in C.S. Book 8, page 170; from original evidence no longer in existence; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>COUNTY SURVEYOR T 33 S R 5 W 9 10 ----- 16 15 1988</p> </div> <p>from which bearing trees mkd. by Mehl</p> <p>A fir, 11 ins. diam., bears N. 27° E., 18.0 ft. dist., with a healed blaze.</p> <p>A fir, 25 ins. diam., bears S. 1° W., 29.4 ft. dist., with a healed blaze.</p> <p>A fir, 27 ins. diam., bears N. 10 1/4° W., 20.5 ft. dist., with a healed blaze.</p> <p>and a bearing tree of unknown origin, reported by the Josephine County Surveyor's Office</p> <p>A madrone snag, 14 ins. diam., bears N. 68 1/4° E., 9.5 ft. dist., with illegible scribe marks visible on bark and a spike at the base of blaze.</p> <p>and a bearing tree mkd. by the Josephine County Surveyor's Office</p> <p>A fir, 19 ins. diam., bears S. 76° E., 35.9 ft. dist., with a healed blaze.</p> <p>N. 0° 19' 52" E., bet. secs. 9 and 10.</p>
2205.48	<p>The remains of an original line tree, a fir snag, 58 ins. diam., mkd. with 2 notches on the N. and S. sides. This now becomes an angle point; from which new reference monuments</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>An iron rod, 30 ins. long, 5/8 in. diam., set 28 ins. in the ground, bears S. 56° 12' 30" E., 15.80 ft. dist., with aluminum cap mkd. RM AP S10 15.80 FT TO COR 2021 and an arrow pointing to the cor.</p> <p>An iron rod, 30 ins. long, 5/8 in. diam., set 28 ins. in the ground, bears S. 69° 35' 53" W., 21.40 ft. dist., with aluminum cap mkd. RM AP S9 21.40 FT TO COR 2021 and an arrow pointing to the cor.</p> <hr/> <p>N. 0° 15' 37" W., beginning new measurement.</p> <p>469.92 Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W 1/4 S 9 S 10 2021</p> <p>from which a bearing tree mkd. by the BLM during an administrative survey in 1977</p> <p>A ponderosa pine, 32 ins. diam., bears N. 7° W., 86.2 ft. dist., with a healed blaze. Add scribe marks 1/4 S9 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p>and a new bearing tree</p> <p>A ponderosa pine, 21 ins. diam., bears S. 48 3/4° E., 16.3 ft. dist., mkd. 1/4 S10 BT.</p> <p>The iron rod set by the BLM administrative survey was not recovered.</p>
1141.24	<p>Point for the S-N 1/64 sec. cor. of secs. 9 and 10.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S-N 1/64 S 9 S 10 2021</p> <p>from which</p> <p>A fir, 16 ins. diam., bears N. 78° E., 7.6 ft. dist., mkd. SN 1/64 S10 BT.</p> <p>A fir, 9 ins. diam., bears S. 74 1/2° W., 6.4 ft. dist., mkd. X at breast height and BT at the base.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET											
	<p>From this cor., a point established as the S-N 1/64 sec. cor. of secs. 9 and 10 by the BLM during an administrative survey in 1977, bears N. 63° 26' 13" W., 10.72 ft. dist. This point was established without federal or state authority and was not utilized for control in the course of this survey; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, from which bearing trees mkd. by the BLM</p> <p>A fir, 27 ins. diam., bears S. 47° E., 12.8 ft. dist., with a healed blaze.</p> <p>A cedar, 9 ins. diam., bears N. 38 3/4° W., 10.2 ft. dist., with a healed blaze.</p> <p>Drive iron rod 3 ins. below the surface of the ground.</p>										
1812.56	Point for the N 1/16 sec. cor. of secs. 9 and 10. Not monumented.										
3155.20	<p>The cor. of secs. 3, 4, 9, and 10, reported by Thielsen in 1957; perpetuated by the Josephine County Surveyor's Office in 2014, recorded in C.S. Book 11, page 277; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td colspan="2">T 33 S R 5 W</td> </tr> <tr> <td>S 4</td> <td>S 3</td> </tr> <tr> <td colspan="2">-----</td> </tr> <tr> <td>S 9</td> <td>S 10</td> </tr> <tr> <td colspan="2">1957</td> </tr> </table> </div> <p>from which bearing trees reported by Thielsen</p> <p>A fir, 50 ins. diam., bears N. 68° E., 29.0 ft. dist., with a healed blaze. (Original)</p> <p>A fir, 36 ins. diam., bears S. 7 1/2° E., 82.5 ft. dist., with a healed blaze.</p> <p>A fir, 38 ins. diam., bears N. 34° W., 9.2 ft. dist., with a healed blaze and a spike at the base on right side center. (Original)</p> <p>and bearing trees mkd. by the Josephine County Surveyor's Office</p> <p>A madrone, 9 ins. diam., bears N. 35 1/2° E., 26.2 ft. dist., with scribe marks CS S3 BT visible on partially healed double blaze and a spike at the base on left side center.</p> <p>A fir, 7 ins. diam., bears S. 5 1/4° E., 25.8 ft. dist., with a healed double blaze and a spike at the base on right side center.</p> <p>A fir, 12 ins. diam., bears S. 55 3/4° W., 12.8 ft. dist., with a healed double blaze and a spike at the base on left side center.</p> <hr/> <p>N. 0° 12' 49" W., bet. secs. 3 and 4.</p>	T 33 S R 5 W		S 4	S 3	-----		S 9	S 10	1957	
T 33 S R 5 W											
S 4	S 3										

S 9	S 10										
1957											

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
1684.35	<p>The remains of an original line tree, a fir snag, 69 ins. diam., mkd. with 2 notches on the N. and S. sides. This now becomes an angle point; from which new reference monuments</p> <p>An iron rod, 30 ins. long, 5/8 in. diam., set 28 ins. in the ground, bears N. 48° 17' 31" E., 17.70 ft. dist., with aluminum cap mkd. RM AP S3 17.70 FT TO COR 2021 and an arrow pointing to the cor.</p> <p>An iron rod, 30 ins. long, 5/8 in. diam., set 28 ins. in the ground, bears N. 43° 27' 29" W., 17.70 ft. dist., with aluminum cap mkd. RM AP S4 17.70 FT TO COR 2021 and an arrow pointing to the cor.</p> <hr/> <p>N. 0° 04' 55" E., beginning new measurement.</p>
1032.05	<p>Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, to the top, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W 1/4 S 4 S 3 2021</p> <p>from which</p> <p>A live oak, 6 ins. diam., bears N. 19 1/4° E., 30.6 ft. dist., mkd. X at breast height and BT at the base.</p> <p>A live oak, 7 ins. diam., bears S. 33 3/4° W., 30.6 ft. dist., mkd. 1/4 S4 BT.</p>
1485	<p>Top of ridge, bears N. 45° E. and S. 45° W.</p>
1951.00	<p>An original line tree, a fir, 60 ins. diam., mkd. with 2 notches on the N. and S. sides. This now becomes an angle point; from which new reference monuments</p> <p>An iron rod, 30 ins. long, 5/8 in. diam., set 28 ins. in the ground, bears S. 80° 15' 49" E., 16.10 ft. dist., with aluminum cap mkd. RM AP S3 16.10 FT TO COR 2021 and an arrow pointing to the cor.</p> <p>An iron rod, 30 ins. long, 5/8 in. diam., set 28 ins. in the ground, bears S. 19° 17' 49" W., 16.10 ft. dist., with aluminum cap mkd. RM AP S4 16.10 FT TO COR 2021 and an arrow pointing to the cor.</p> <hr/> <p>N. 0° 04' 55" E., beginning new measurement.</p>
451.73	<p>Point for the N 1/16 sec. cor. of secs. 3 and 4.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S 4 S 3 2021</p> <p>from which</p> <p style="padding-left: 40px;">A fir, 7 ins. diam., bears N. 84 1/2° E., 14.7 ft. dist., mkd. N 1/16 S3 BT.</p> <p style="padding-left: 40px;">A fir, 5 ins. diam., bears N. 51 1/4° W., 21.5 ft. dist., mkd. X at breast height and BT at the base.</p>
1725.60	<p>The original closing cor. of secs. 3 and 4, perpetuated by Price, PLS No. 33, in 1953; and subsequently perpetuated by Quimby, PLS No. 1654, in 2015, filed in the Douglas County Surveyor's Office under M166-36; monumented with an iron pipe, 1 1/2 ins. diam., firmly set, projecting 14 ins. above the ground, with nail and washer on top mkd. RS 33, from which the remains of an original bearing tree</p> <p style="padding-left: 40px;">A rotted fir snag, size indeterminate, bears S. 42 1/4° W., 47.1 ft. dist., with illegible scribe marks visible on open blaze. (Record, 66.0 ft.)</p> <p>and bearing trees mkd. by Quimby</p> <p style="padding-left: 40px;">A fir, 33 ins. diam., bears N. 32° E., 6.9 ft. dist., with scribe marks T33S R5W S3 BT visible on partially healed blaze.</p> <p style="padding-left: 40px;">A fir, 11 ins. diam., bears S. 8° W., 11.6 ft. dist., with no marks visible on partially healed blaze.</p> <p style="padding-left: 40px;">A chinquapin, 8 ins. diam., bears S. 45 3/4° W., 28.6 ft. dist., with scribe marks T33S R5W S4 BT visible on partially healed blaze.</p> <p style="padding-left: 40px;">A fir, 27 ins. diam., bears N. 11 3/4° W., 38.1 ft. dist., with no marks visible on partially healed blaze.</p> <p>Alongside the iron pipe, found the original basalt stone, 12 x 10 x 6 ins., loosely set, with chisel marks CC visible on the S. side.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, directly over the iron pipe, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 32 S R 5 W S 33</p> <hr style="width: 20%; margin: auto;"/> <p style="text-align: center;">S 4 S 3 T 33 S R 5 W CC 2021</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>Bury the original stone alongside the stainless steel post.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 28 and 33, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W S 28 1/4 ——— S 33 1966</p> <p>from which the remains of bearing trees reported by Roseberry</p> <p style="padding-left: 40px;">A rotted white oak snag, size indeterminate, bears N. 43 3/4° E., 10.6 ft. dist., with no marks visible on decayed blaze. (Original)</p> <p style="padding-left: 40px;">A fir, 38 ins. diam., bears N. 45 1/2° E., 19.1 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A fir, 21 ins. diam., bears S. 80° W., 5.3 ft. dist., with a healed blaze.</p> <p>N. 88° 42' 59" W., bet. secs. 28 and 33.</p>
218.35	<p>An original line tree, reported by Roseberry in 1977-80, a fir, 61 ins. diam., mkd. with 2 notches on the E. and W. sides. This now becomes an angle point; from which new reference monuments</p> <p style="padding-left: 40px;">An iron rod, 24 ins. long, 5/8 in. diam., set 22 ins. in the ground, bears S. 40° 48' 23" W., 15.50 ft. dist., with aluminum cap mkd. RM AP S33 15.50 FT TO COR 2021 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">An iron rod, 24 ins. long, 5/8 in. diam., set 22 ins. in the ground, bears N. 35° 45' 05" W., 10.20 ft. dist., with aluminum cap mkd. RM AP S28 10.20 FT TO COR 2021 and an arrow pointing to the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 88° 42' 59" W., beginning new measurement.</p>
1137.90	<p>Point for the W 1/16 sec. cor. of secs. 28 and 33. Not monumented.</p> <p>From this cor., a point erroneously established as the W 1/16 sec. cor. of secs. 28 and 33, by Colisch, PLS No. 2659, in 2020, bears S. 89° 58' 17" W., 7.13 ft. dist. This point was established using improper control and was not accepted for the cor. or utilized for control in the course of this survey; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 1 in. above the ground, with yellow plastic cap mkd. COLISCH PLS 2659; from which bearing trees mkd. by Colisch</p> <p style="padding-left: 40px;">A madrone, 13 ins. diam., bears S. 34° E., 15.3 ft. dist., with no marks visible on partially healed blaze.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET											
2508.28	<p>A madrone, 17 ins. diam., bears N. 88 1/4° W., 25.3 ft. dist., with no marks visible on partially healed blaze.</p> <p>The cor. of secs. 28, 29, 32, and 33, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T 33 S</td> <td>R 5 W</td> </tr> <tr> <td>S 29</td> <td>S 28</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td>S 32</td> <td>S 33</td> </tr> <tr> <td colspan="2">1966</td> </tr> </table> </div> <p>from which the remains of bearing trees reported by Roseberry</p> <p>A fir, 42 ins. diam., bears N. 27 1/2° E., 53.1 ft. dist., with a healed blaze.</p> <p>A cedar, 19 ins. diam., bears S. 17° E., 12.2 ft. dist., with a healed blaze.</p> <p>A fir, 13 ins. diam., bears S. 48 1/2° W., 39.6 ft. dist., with a healed blaze.</p> <p>A rotted fir stump, size indeterminate, bears N. 53 1/4° W., 13.2 ft. dist., with scribe marks 33S R5W S29 visible on open blaze. (Original)</p> <p>A fir, 25 ins. diam., bears N. 6 1/2° W., 29.3 ft. dist., with a healed blaze. (Record, 30.4 ft.)</p>	T 33 S	R 5 W	S 29	S 28			S 32	S 33	1966	
T 33 S	R 5 W										
S 29	S 28										
S 32	S 33										
1966											
1325.28	<p>N. 0° 33' 36" E., bet. secs. 28 and 29.</p> <p>The S 1/16 sec. cor. of secs. 28 and 29, reported by Roseberry in 1977-80, monumented with an iron rod, 5/8 in. diam., firmly set, projecting 6 ins. above the ground, from which bearing trees reported by Roseberry</p> <p>A fir, 17 ins. diam., bears N. 31° E., 19.1 ft. dist., with a healed blaze.</p> <p>A cedar, 31 ins. diam., bears N. 49° W., 8.6 ft. dist., with a healed blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>S 1/16</td> <td></td> </tr> <tr> <td>S 29</td> <td>S 28</td> </tr> <tr> <td colspan="2">2021</td> </tr> </table> </div>	S 1/16		S 29	S 28	2021					
S 1/16											
S 29	S 28										
2021											
661.78	<p>N. 0° 30' 33" E., beginning new measurement.</p> <p>The N-S 1/64 sec. cor. of secs. 28 and 29, established by Maakestad, PLS No. 2429, in 1992; and is accepted as the cor.; monumented with an iron rod,</p>										

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>5/8 in. diam., firmly set, projecting 1 in. above the ground, with aluminum cap mkd. MAAKESTAD RPLS 2429.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <p style="text-align: center;">N-S 1/64 S 29 S 28 2021</p> <p>from which new bearing trees</p> <p style="padding-left: 40px;">A cedar, 9 ins. diam., bears N. 6 3/4° E., 27.3 ft. dist., mkd. NS 1/64 S28 BT.</p> <p style="padding-left: 40px;">A cedar, 9 ins. diam., bears N. 48 3/4° W., 27.7 ft. dist., mkd. X at breast height and BT at the base.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N. 0° 31' 39" E., beginning new measurement.</p>
661.90	<p>The 1/4 sec. cor. of secs. 28 and 29, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 16 ins. above the ground, in a mound of stone, 4 ft. base, to the top, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W 1/4 S 29 S 28 1966</p> <p>from which the remains of a bearing tree reported by Roseberry</p> <p style="padding-left: 40px;">A roothole bears N. 40 3/4° E., 77.9 ft. dist., alongside of which is a down and decayed ponderosa pine, size indeterminate, with no marks visible on decayed blaze. (Original)</p> <p>and new bearing trees</p> <p style="padding-left: 40px;">A white oak, 6 ins. diam., bears S. 73 1/2° E., 32.4 ft. dist., mkd. 1/4 S28 BT.</p> <p style="padding-left: 40px;">A cedar, 6 ins. diam., bears S. 23 1/4° W., 21.8 ft. dist., mkd. X at breast height and BT at the base.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>From the 1/4 sec. cor. of secs. 9 and 16, perpetuated by Baughman, PLS No. 536, in 1976; monumented with an iron post, 2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	<p style="text-align: center;">COUNTY SURVEYOR T 33 S R 5 W 9 1/4 S _____ 16 1976</p> <p>from which the remains of original bearing trees</p> <p style="padding-left: 40px;">A rotted fir stump, size indeterminate, bears N. 60 1/2° E., 45.5 ft. dist., with scribe marks 1/4 S visible on open blaze.</p> <p style="padding-left: 40px;">A rotted fir stump, size indeterminate, bears S. 75° W., 30.4 ft. dist., with scribe marks 1/4 S visible on open blaze.</p> <p>and bearing trees mkd. by Baughman</p> <p style="padding-left: 40px;">A madrone, 10 ins. diam., bears N. 30 1/2° E., 4.7 ft. dist., with illegible scribe marks visible on bark.</p> <p style="padding-left: 40px;">A fir, 23 ins. diam., bears S. 78° E., 19.7 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A madrone, 13 ins. diam., bears N. 72 1/2° W., 27.4 ft. dist., with illegible scribe marks visible on bark.</p> <p>S. 89° 58' 50" W., bet. secs. 9 and 16.</p> <p>669.24 The E-W 1/64 sec. cor. of secs. 9 and 16, established by Lawrence, PE No. 1543, in 1953; and is accepted as the cor.; monumented with an iron pipe, 1/2 in. diam., firmly set, projecting 11 ins. above the ground, from which a bearing tree mkd. by Lawrence</p> <p style="padding-left: 40px;">A chinquapin, 16 ins. diam., bears S. 85 1/2° E., 6.7 ft. dist., with no marks visible on rotted blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, directly over the iron pipe, with brass cap mkd.</p> <p style="text-align: center;">S 9 E-W 1/64 S 16 2021</p> <p>and a new bearing tree</p> <p style="padding-left: 40px;">A chinquapin, 11 ins. diam., bears N. 29 1/4° E., 14.7 ft. dist., mkd. X at breast height and BT at the base.</p> <p style="text-align: center;">_____</p> <p>N. 89° 53' 11" W., beginning new measurement.</p>
------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

<p>FEET 666.18</p>	<p>The W 1/16 sec. cor. of secs. 9 and 16, established by Lawrence, PE No. 1543, in 1953; and is accepted as the cor.; monumented with an iron pipe, 1/2 in. diam., firmly set, projecting 1 in. above the ground, in a collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, directly over the iron pipe, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>S 9 W 1/16 ——— S 16 2021</p> </div> <p>from which new bearing trees</p> <p style="margin-left: 40px;">A fir, 17 ins. diam., bears N. 3° E., 38.7 ft. dist., mkd. W 1/16 S9 BT.</p> <p style="margin-left: 40px;">A cedar, 14 ins. diam., bears S. 52° W., 9.8 ft. dist., mkd. W 1/16 S16 BT.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 44' 55" W., beginning new measurement.</p>
<p>1357.19</p>	<p>The cor. of secs. 8, 9, 16, and 17, reported by Gawron et al., in 1965-67, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T 33 S R 5 W S 8 S 9 ————— S 17 S 16 1967</p> </div> <p>from which the remains of bearing trees reported by Gawron et al.</p> <p style="margin-left: 40px;">A fir, 20 ins. diam., bears N. 20° E., 15.6 ft. dist., with a healed blaze. (Record, 27.1 ft.)</p> <p style="margin-left: 40px;">A fir, 11 ins. diam., bears S. 35 1/2° E., 9.9 ft. dist., with a healed blaze.</p> <p style="margin-left: 40px;">A rotted fir stump, size indeterminate, bears S. 32 1/2° E., 35.0 ft. dist., with illegible scribe marks visible on rotted blaze. (Original)</p> <p style="margin-left: 40px;">A fir, 11 ins. diam., bears S. 57 1/2° W., 8.7 ft. dist., with a healed blaze. (Record, 9.9 ft.)</p> <p style="margin-left: 40px;">A fir, 17 ins. diam., bears N. 46 1/4° W., 9.9 ft. dist., with a healed blaze. (Record, N. 53 1/2° W.)</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 0° 00' 15" E., bet. secs. 8 and 9.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
1260	Speaker Road, asphalt surface, 24 ft. wide, bears S. 80° E. and N. 80° W.
1340.98	<p>Point for the S 1/16 sec. cor. of secs. 8 and 9.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S 1/16 S 8 S 9 2021</p> <p>from which a bearing tree mkd. by the BLM during an administrative survey in 1977</p> <p style="padding-left: 40px;">A cedar, 22 ins. diam., bears S. 77 3/4° E., 20.1 ft. dist., with a healed blaze. Add scribe marks S 1/16 S9 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p>and a new bearing tree</p> <p style="padding-left: 40px;">A fir, 8 ins. diam., bears S. 27 1/2° W., 13.5 ft. dist., mkd. X at breast height and BT at the base.</p> <p>From this cor., a point established as the S 1/16 sec. cor. of secs. 8 and 9 by the BLM during an administrative survey in 1977, bears N. 30° 18' 36" W., 0.22 ft. dist. This point was established without federal or state authority and was not utilized for control in the course of this survey; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 3 ins. above the ground.</p> <p>Remove the iron rod and deposit inside the stainless steel post.</p>
2681.96	<p>The 1/4 sec. cor. of secs. 8 and 9, reported by Gawron et al., in 1965-67, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W 1/4 S 8 S 9 1967</p> <p>from which bearing trees reported by Gawron et al.</p> <p style="padding-left: 40px;">A cedar, 36 ins. diam., bears S. 49 3/4° E., 115.5 ft. dist., with a healed blaze. (Record, S. 49° E.)</p> <p style="padding-left: 40px;">A fir, 41 ins. diam., bears S. 44° W., 34.3 ft. dist., with a healed blaze. (Original)</p> <p style="padding-left: 40px;">A fir, 29 ins. diam., bears N. 40° W., 141.9 ft. dist., with a healed blaze.</p> <hr/>

**Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p>From the 1/4 sec. cor. of secs. 4 and 5, reported by Roseberry and Evans in 1973-74, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd.</p> <p align="center">T 33 S R 5 W 1/4 S 5 S 4 1974</p> <p>from which bearing trees reported by Roseberry and Evans</p> <p>A fir, 45 ins. diam., bears S. 67° E., 54.5 ft. dist., with a healed blaze.</p> <p>A fir, 32 ins. diam., bears S. 26 1/2° W., 23.1 ft. dist., with a healed blaze.</p> <p>N. 0° 43' 28" E., bet. secs. 4 and 5.</p>
2697.12	<p>The original closing cor. of secs. 4 and 5, at intersection with the N. bdy. of the Tp. (Seventh Standard Parallel South), perpetuated by Wenderoth, PLS No. 5, in 1953; subsequently perpetuated by the Douglas County Surveyor's Office in 1967, under C.S. File 53/52-56; and again in 2000, under C.S. File 66/16-17; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <p align="center">COUNTY SURVEYORS OFFICE T 32 S R 5 W ----- S 5 S 4 T 33 S 1967</p> <p>from which the remains of an original bearing tree</p> <p>A rotted fir stump, size indeterminate, bears S. 34 1/2° E., 87.1 ft. dist., with illegible scribe marks visible on open blaze.</p> <p>and a bearing tree mkd. by the Douglas County Surveyor's Office in 1967</p> <p>A hemlock, 17 ins. diam., bears S. 21 3/4° E., 34.8 ft. dist., with a healed double blaze.</p> <p>and a bearing tree mkd. by the Douglas County Surveyor's Office in 2000</p> <p>A hemlock, 25 ins. diam., bears N. 88 1/2° E., 12.2 ft. dist., with illegible scribe marks visible on partially healed double blaze.</p> <p>and a new bearing tree</p> <p>A hemlock, 10 ins. diam., bears S. 46° W., 7.5 ft. dist., mkd. T33S R5W S5 CC BT.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	<p>From this cor., a point established by Wenderoth, bears N. 52° 18' 55" E., 6.43 ft. dist., monumented with a welded angle iron, firmly set, projecting 10 ins. above the ground, and was not utilized for control in the course of this survey. It appears that the welded angle iron was moved from the position that it was originally established.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 30 and 31, reported by Gawron et al., in 1965-67; perpetuated by the Josephine County Surveyor's Office in 2013, recorded in C.S. Book 11, page 210; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 33 S R 5 W S 30 1/4 ——— S 31 1966</p> </div> <p>from which the remains of bearing trees reported by Gawron et al.</p> <p style="padding-left: 40px;">A fir, 20 ins. diam., bears N. 70° E., 40.9 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A rotted fir stump, 37 ins. diam., bears S. 39 1/2° E., 19.8 ft. dist., with a healed blaze. (Original)</p> <p style="padding-left: 40px;">A fir, 36 ins. diam., bears N. 20° W., 7.9 ft. dist., with a healed blaze. (Original)</p> <p>and a bearing tree mkd. by the Josephine County Surveyor's Office</p> <p style="padding-left: 40px;">A fir, 11 ins. diam., bears S. 45 1/4° W., 6.4 ft. dist., with a healed double blaze.</p> <p>S. 89° 48' 08" W., bet. secs. 30 and 31.</p>
2290.53	<p>The cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp., reported by Roseberry in 1978, monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with bronze cap mkd.</p> <div style="text-align: center;"> <p>OREGON STATE BOARD OF FORESTRY T 33 S S 25 S 30 R 6 W ——— ——— R 5 W S 36 S 31 1959 RS 359</p> </div> <p>from which the remains of bearing trees reported by Roseberry</p> <p style="padding-left: 40px;">A fir, 22 ins. diam., bears N. 38° E., 13.2 ft. dist., with a healed blaze.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET											
	<p>A rotted fir stump, 57 ins. diam., bears S. 38 1/2° E., 70.0 ft. dist., no marks visible.</p> <p>A fir, 25 ins. diam., bears S. 65 1/4° W., 26.4 ft. dist., with a healed blaze.</p> <p>A rotted fir stump, 52 ins. diam., bears N. 49 3/4° W., 42.2 ft. dist., with a healed blaze. (Original)</p> <p>and new bearing trees</p> <p>A fir, 10 ins. diam., bears S. 46° E., 31.1 ft. dist., mkd. T33S R5W S31 BT.</p> <p>A madrone, 10 ins. diam., bears N. 17 1/4° W., 21.6 ft. dist., mkd. X at breast height and BT at the base.</p> <hr/> <p>From the cor. of secs. 29, 30, 31, and 32, reported by Gawron et al., in 1965-67, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">T 33 S R 5 W</td> </tr> <tr> <td style="text-align: center;">S 30</td> <td style="text-align: center;">S 29</td> </tr> <tr> <td colspan="2" style="text-align: center;">-----</td> </tr> <tr> <td style="text-align: center;">S 31</td> <td style="text-align: center;">S 32</td> </tr> <tr> <td colspan="2" style="text-align: center;">1967</td> </tr> </table> <p>from which a bearing tree reported by Gawron et al.</p> <p>A live oak, 19 ins. diam., bears S. 12° W., 21.1 ft. dist., with no marks visible on rotted blaze. (Original)</p> <p>and new bearing trees</p> <p>A fir, 13 ins. diam., bears N. 63 1/2° E., 10.9 ft. dist., mkd. T33S R5W S29 BT.</p> <p>A fir, 14 ins. diam., bears S. 30° E., 13.5 ft. dist., mkd. T33S R5W S32 BT.</p> <p>A fir, 6 ins. diam., bears N. 33 1/2° W., 24.0 ft. dist., mkd. X at breast height and BT at the base.</p> <p>N. 0° 34' 41" W., bet. secs. 29 and 30.</p>	T 33 S R 5 W		S 30	S 29	-----		S 31	S 32	1967	
T 33 S R 5 W											
S 30	S 29										

S 31	S 32										
1967											
1311.73	<p>The S 1/16 sec. cor. of secs. 29 and 30, established by Templin, PE No. 3024, in 1969; and is accepted as the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 8 ins. above the ground, from which bearing trees mkd. by Templin</p> <p>A maple, 17 ins. diam., bears N. 45 1/4° W., 27.6 ft. dist., with a healed blaze.</p> <p>A fir, 39 ins. diam., bears N. 20 1/2° W., 49.2 ft. dist., with a healed blaze.</p>										

**Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <p style="text-align: center;">S 1/16 S 30 S 29 2021</p> <p>and a new bearing tree</p> <p style="padding-left: 40px;">A fir, 12 ins. diam., bears N. 61 1/4° E., 27.7 ft. dist., mkd. X at breast height and BT at the base.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 07' 06" W., beginning new measurement.</p>
1311.35	<p>The 1/4 sec. cor. of secs. 29 and 30, reported by Roseberry in 1977-80, monumented with the original cor. tree, a madrone, 15 ins. diam., with a healed blaze, from which accessories reported by Roseberry</p> <p style="padding-left: 40px;">A fir, 25 ins. diam., bears N. 2° E., 23.1 ft. dist., with a healed blaze. (Original)</p> <p style="padding-left: 40px;">A fir snag, 39 ins. diam., bears S. 20° W., 17.8 ft. dist., with a healed blaze. (Original)</p> <p style="padding-left: 40px;">An iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, bears N. 45° 00' 00" W., 4.30 ft. dist., with brass cap mkd. T33S R5W 1/4 S30 RM 1967 and an arrow pointing to the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 24' 07" W., beginning new measurement.</p>
860.24	<p>The remains of an original line tree, reported by Roseberry in 1977-80, a burnt and decayed double fir snag, 60 ins. diam., mkd. with 2 notches on the S. side. This now becomes an angle point; from which new reference monuments</p> <p style="padding-left: 40px;">An iron rod, 24 ins. long, 5/8 in. diam., set 23 ins. in the ground, bears S. 36° 50' 42" E., 13.00 ft. dist., with aluminum cap mkd. RM AP S29 13.00 FT TO COR 2021 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">An iron rod, 24 ins. long, 5/8 in. diam., set 23 ins. in the ground, bears S. 40° 30' 09" W., 13.60 ft. dist., with aluminum cap mkd. RM AP S30 13.60 FT TO COR 2021 and an arrow pointing to the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 26' 47" E., beginning new measurement.</p>
1197.98	<p>The crossing closing cor. of secs. 29 and 30 with line 5-6 of William Ruble Placer, Mineral Survey No. 233, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p>

**Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET

MS 233
WR

S 30 | S 29
T 33 S R 5 W
CCC
1977

from which bearing trees reported by Roseberry

A fir, 13 ins. diam., bears S. 13 3/4° E., 37.6 ft. dist., with a healed blaze.

A fir, 19 ins. diam., bears S. 59 3/4° W., 23.1 ft. dist., with a healed blaze.

From this cor., a point reported by Roseberry, bears S. 41° 00' 00" E., 53.65 ft. dist. (Record, 54.12 ft.); monumented with an iron pipe, 1/2 in. diam., firmly set, projecting 6 ins. above the ground, with lead cap mkd. 1543 WRM S29 S30, from which a bearing tree reported by Roseberry

A fir, 18 ins. diam., bears S. 66 1/2° W., 58.4 ft. dist., with a healed double blaze.

Also from this cor., a point established by Hull, PLS No. 901, in 1980, bears S. 9° 34' 05" E., 38.93 ft. dist.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, with yellow plastic cap mkd. HULL RS901.

**Dependent Resurvey of a Portion of Mineral Survey No. 141,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

Restoring the 1887 survey by James S. Howard
and the 1977-80 resurvey by Lynn M. Roseberry

From the crossing closing cor. of secs. 27 and 28 with line 1-2 of Dividend Quartz Lode, Mineral Survey No. 141, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, in a collar of stone, with brass cap mkd.

D-141

S 28 | S 27
T 33 S | R 5 W
CCC
1978

from which bearing trees reported by Roseberry

A cedar, 18 ins. diam., bears S. 33 3/4° E., 60.9 ft. dist., with a healed blaze. (Record, S. 32° E., 60.1 ft.)

Dependent Resurvey of a Portion of Mineral Survey No. 141,
T. 33 S., R. 5 W., Willamette Meridian, Oregon


FEET	
304.34	<p>A cedar, 24 ins. diam., bears S. 27 1/4° W., 48.6 ft. dist., with a healed blaze. (Record, S. 29° W., 49.5 ft.)</p> <p>N. 69° 40' 17" E., on a portion of line 1-2 of Dividend Quartz Lode, Mineral Survey No. 141.</p> <p>Corner No. 2 of Dividend Quartz Lode, Mineral Survey No. 141, reported by Roseberry in 1977-80; perpetuated by the Josephine County Surveyor's Office in 2020, as shown on the preliminary record dated September 30, 2020, not recorded at the time of this survey; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd.</p> <div data-bbox="795 682 1006 871" style="text-align: center;"> <p>MS 141 D 2 S 27 T 33 S R 5 W 1978</p> </div> <p>from which the remains of bearing trees reported by Roseberry</p> <p>A fir, 22 ins. diam., bears S. 67 3/4° E., 25.7 ft. dist., with a healed blaze.</p> <p>A rotted fir stump, size indeterminate, bears West, 13.5 ft. dist., with scribe marks BT visible on open blaze. (Original)</p> <p>A fir, 28 ins. diam., bears N. 71 1/4° W., 53.1 ft. dist., with a healed blaze. (Record, N. 68° W.)</p> <p>and a bearing tree mkd. by the Josephine County Surveyor's Office</p> <p>A madrone, 10 ins. diam., bears N. 37 3/4° E., 25.0 ft. dist., with scribe marks CS visible on partially healed upper blaze and S27 BT visible on partially healed lower blaze.</p>
592.70	<p>N. 20° 28' 31" W., on line 2-3 of Dividend Quartz Lode, Mineral Survey No. 141.</p> <p>Corner No. 3 of Dividend Quartz Lode, Mineral Survey No. 141, reported by Roseberry in 1977-80; perpetuated by the Josephine County Surveyor's Office in 2020, as shown on the preliminary record dated October 7, 2020, not recorded at the time of this survey; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of Mineral Survey No. 141,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<div data-bbox="820 325 1006 504" data-label="Diagram"> <p>T 33 S R 5 W S 27 D 3 MS 141 1978</p> </div> <p data-bbox="389 535 1218 567">from which the remains of bearing trees reported by Roseberry</p> <ul data-bbox="430 598 1429 840" style="list-style-type: none"> A cedar, 19 ins. diam., bears S. 72° E., 53.5 ft. dist., with a healed blaze and a spike at the base on right side center. (Record, S. 71° E.) A fir, 26 ins. diam., bears S. 15 1/2° W., 54.5 ft. dist., with a healed blaze and a spike at the base on right side center. (Record, S. 16 1/2° W.) A rotted fir stump, size indeterminate, bears S. 31° W., 9.9 ft. dist., with no marks visible on open blaze. (Original)
83.31	<p data-bbox="389 903 1315 966">S. 70° 07' 06" W., on line 3-4 of Dividend Quartz Lode, Mineral Survey No. 141.</p> <p data-bbox="389 997 1421 1176">The crossing closing cor. of secs. 27 and 28 with line 3-4 of Dividend Quartz Lode, Mineral Survey No. 141, reported by Roseberry in 1977-80; perpetuated by the Josephine County Surveyor's Office in 2020, as shown on the preliminary record dated October 7, 2020, not recorded at the time of this survey; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p> <div data-bbox="803 1207 1015 1386" data-label="Diagram"> <p>CCC T 33 S R 5 W S 28 S 27 D-141 1978</p> </div> <p data-bbox="389 1417 1023 1449">from which bearing trees reported by Roseberry</p> <ul data-bbox="430 1480 1380 1627" style="list-style-type: none"> A cedar, 16 ins. diam., bears N. 51 1/4° E., 35.0 ft. dist., with a healed blaze and a spike at the base on right side center. A cedar, 32 ins. diam., bears N. 48 3/4° W., 34.5 ft. dist., with a healed blaze and a spike at the base on right side center. (Record, 35.6 ft.)
1399.12	<p data-bbox="389 1690 1023 1722">S. 69° 37' 40" W., beginning new measurement.</p> <p data-bbox="389 1753 1429 1900">Corner No. 4 of Dividend Quartz Lode, Mineral Survey No. 141, identical with Corner No. 3 of St. Peters Quartz Lode, Mineral Survey No. 142, on line 2-3 of Division Quartz Lode, Mineral Survey No. 197, reported by Roseberry in 1977-80; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p>

**Dependent Resurvey of a Portion of Mineral Survey No. 141,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET




from which the remains of bearing trees reported by Roseberry

- A fir snag, 19 ins. diam., bears S. 83° E., 9.9 ft. dist., with illegible scribe marks visible on open blaze.
- A cedar, 12 ins. diam., bears S. 66 1/4° E., 16.5 ft. dist., with a healed blaze.
- A cedar, 17 ins. diam., bears S. 3° W., 6.6 ft. dist., with a healed blaze.

**Dependent Resurvey of a Portion of Mineral Survey No. 142,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

Restoring the 1887 survey by James S. Howard
and the 1977-80 resurvey by Lynn M. Roseberry

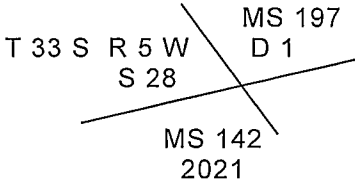
From Corner No. 2 of St. Peters Quartz Lode, Mineral Survey No. 142, on line 1-2 of Summit Quartz Lode, Mineral Survey No. 143, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, in a mound of stone, 3 ft. base, to the top, with brass cap mkd.



from which the remains of bearing trees reported by Roseberry

- A fir, 24 ins. diam., bears N. 57 1/2° E., 30.7 ft. dist., with a healed blaze.
- A fir, 31 ins. diam., bears N. 89° E., 42.9 ft. dist., with a healed blaze. (Record, N. 87° E.)
- A rotted fir stump, size indeterminate, bears S. 20° E., 8.6 ft. dist., no marks visible. (Original)

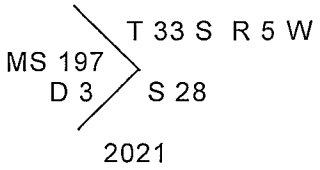
**Dependent Resurvey of a Portion of Mineral Survey No. 142,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
768.00	<p>N. 70° 25' 03" E., on line 2-3 of St. Peters Quartz Lode, Mineral Survey No. 142.</p> <p>Corner No. 1 of Division Quartz Lode, Mineral Survey No. 197, reestablished by the BLM during an administrative survey in 1979, at intersection with line 5-2 of Division Quartz Lode, Mineral Survey No. 197; reported by the Josephine County Surveyor's Office in 2007, recorded in C.S. Book 10, page 158. There is no remaining evidence of the original cor., therefore this point is accepted as a careful and faithful reestablishment of the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 6 ins. above the ground, in a collar of stone, from which bearing trees mkd. by the BLM</p> <p>A fir, 16 ins. diam., bears S. 56 3/4° W., 30.6 ft. dist., with a healed blaze. Add scribe marks X at breast height and BT at the base on new blazes and drive a Mag Nail at the base on right side center.</p> <p>A fir, 19 ins. diam., bears N. 27° W., 7.4 ft. dist., with a healed blaze. Add scribe marks MS 197 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the iron rod, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>N. 70° 26' 38" E., beginning new measurement.</p>
711.68	<p>Corner No. 3 of St. Peters Quartz Lode, Mineral Survey No. 142, identical with Corner No. 4 of Dividend Quartz Lode Mineral Survey No. 141, on line 2-3 of Division Quartz Lode, Mineral Survey No. 197, hereinbefore described.</p> <hr/> <p align="center">Dependent Resurvey of a Portion of Mineral Survey No. 197, T. 33 S., R. 5 W., Willamette Meridian, Oregon</p> <hr/> <p align="center">Restoring the 1889 survey by James S. Howard</p> <hr/> <p>Note: In 1979, the BLM executed an administrative survey of Division Quartz Lode, Mineral Survey No. 197. There was no original evidence of the cors. recovered for Mineral Survey No. 197 and the cors. were reestablished at record bearing and dist. from Corner No. 3 of St. Peters Quartz Lode, Mineral Survey No. 142, identical with Corner No. 4 of Dividend Quartz Lode, Mineral Survey No. 141, on line 2-3 of Division Quartz Lode, Mineral Survey No. 197.</p>

Dependent Resurvey of a Portion of Mineral Survey No. 197,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>The BLM administrative survey cors. were determined to be reestablished using a proper procedure. During the course of this survey, the administrative cors. were recovered and were found to be within an acceptable tolerance relative to the calculated positions and were utilized as hereinafter described. The report by Kevin G. Mulder, Cadastral Surveyor, dated August 11, 2021, further documents the evaluation of certain cors. and details the findings of this dependent resurvey of Mineral Survey No. 197.</p> <p>From Corner No. 1 of Division Quartz Lode, Mineral Survey No. 197, hereinbefore described.</p> <p>S. 44° 53' 14" E., on line 1-2 of Division Quartz Lode, Mineral Survey No 197.</p>
307.23	<p>Corner No. 2 of Division Quartz Lode, Mineral Survey No. 197, reestablished by the BLM during an administrative survey in 1979; and reported by the Josephine County Surveyor's Office in 2007, recorded in C.S. Book 10, page 157. There is no remaining evidence of the original cor., therefore this point is accepted as a careful and faithful reestablishment of the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, from which the remains of bearing trees mkd. by the BLM</p> <p>A fir, 15 ins. diam., bears N. 58° E., 2.9 ft. dist., with a healed blaze. Add scribe marks MS 197 D2 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p>A rotted madrone stump, size indeterminate, bears N. 43 1/4° W., 14.1 ft. dist., with no marks visible on partially healed blaze and a spike in the face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p>and a new bearing tree</p> <p>A fir, 7 ins. diam., bears S. 51 1/4° E., 20.2 ft. dist., mkd. X at breast height and BT at the base.</p>
643.26	<p>N. 44° 52' 07" E., on line 2-3 of Division Quartz Lode, Mineral Survey No. 197.</p> <p>Corner No. 4 of Dividend Quartz Lode, Mineral Survey No. 141, identical with Corner No. 3 of St. Peters Quartz Lode, Mineral Survey No. 142, hereinbefore described.</p> <hr style="width: 20%; margin: 0 auto;"/>

**Dependent Resurvey of a Portion of Mineral Survey No. 197,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
857.08	<p>N. 45° 53' 44" E., beginning new measurement.</p> <p>Corner No. 3 of Division Quartz Lode, Mineral Survey No. 197, reestablished by the BLM during an administrative survey in 1979. There is no remaining evidence of the original cor., therefore this point is accepted as a careful and faithful reestablishment of the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, from which bearing trees mkd. by the BLM</p> <p>A fir, 13 ins. diam., bears N. 38° E., 25.9 ft. dist., with a healed blaze and a spike in the face. Add scribe marks X at breast height and BT at the base on new blazes and drive a Mag Nail at the base on right side center.</p> <p>A fir, 17 ins. diam., bears N. 59 1/2° W., 33.3 ft. dist., with a healed blaze. Add scribe marks MS 197 D3 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <div style="text-align: center;">  </div>
600.02	<p>N. 44° 46' 27" W., on line 3-4 of Division Quartz Lode, Mineral Survey No 197.</p> <p>Corner No. 4 of Division Quartz Lode, Mineral Survey No. 197, reestablished by the BLM during an administrative survey in 1979. There is no remaining evidence of the original cor., therefore this point is accepted as a careful and faithful reestablishment of the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 14 ins. above the ground, from which bearing trees mkd. by the BLM</p> <p>A fir, 24 ins. diam., bears S. 13 3/4° E., 39.9 ft. dist., with a healed blaze. Add scribe marks MS 197 D4 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p>A fir, 25 ins. diam., bears S. 79° W., 2.3 ft. dist., with a healed blaze. Add scribe marks X at breast height and BT at the base on new blazes and drive a Mag Nail at the base on right side center.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the iron rod, with brass cap mkd.</p>



Dependent Resurvey of a Portion of Mineral Survey No. 197,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
1502.38	<div data-bbox="812 304 998 451" style="text-align: center;"> <p>T 33 S R 5 W S 28 D 4 MS 197 2021</p> </div> <p data-bbox="393 485 1343 573">Note: A search was made for the middle lode cor. on line 3-4 of Division Quartz Claim, Mineral Survey No. 197, and no original evidence was recovered.</p> <hr/> <p data-bbox="393 632 1414 663">S. 45° 28' 22" W., on line 4-5 of Division Quartz Lode, Mineral Survey No 197.</p> <p data-bbox="393 695 1406 909">Corner No. 5 of Division Quartz Lode, Mineral Survey No. 197, reestablished by the BLM during an administrative survey in 1979, and reported by the Josephine County Surveyor's Office in 2007, recorded in C.S. Book 10, page 159. There is no remaining evidence of the original cor., therefore this point is accepted as a careful and faithful reestablishment of the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 8 ins. above the ground, from which the remains of bearing trees mkd. by the BLM</p> <p data-bbox="435 938 1422 1029">A fir, 28 ins. diam., bears N. 40 1/2° E., 32.5 ft. dist., with a healed blaze. Add scribe marks S28 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p data-bbox="435 1058 1347 1119">A cedar stump, 24 ins. diam., bears S. 8 1/4° W., 20.4 ft. dist., with a healed blaze.</p> <p data-bbox="393 1150 641 1180">At the corner point</p> <p data-bbox="393 1209 1406 1270">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <div data-bbox="738 1291 1039 1449" style="text-align: center;"> <p>T 33 S R 5 W S 28 MS 197 D 5 2021</p> </div> <p data-bbox="393 1480 698 1509">and a new bearing tree</p> <p data-bbox="435 1539 1369 1600">A fir, 11 ins. diam., bears S. 72 1/4° W., 31.4 ft. dist., mkd. X at breast height and BT at the base.</p>
293.28	<hr/> <p data-bbox="393 1659 1414 1690">S. 45° 04' 18" E., on line 5-1 of Division Quartz Lode, Mineral Survey No. 197.</p> <p data-bbox="393 1719 1386 1780">Corner No. 1 of Division Quartz Lode, Mineral Survey No. 197, hereinbefore described.</p> <hr/>

**Dependent Resurvey of a Portion of Mineral Survey No. 233,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p align="center">Restoring the 1891 survey by W.F. Briggs and the 1977-80 resurvey by Lynn M. Roseberry</p> <hr/> <p>From Corner No. 1 of William Ruble Placer, Mineral Survey No. 233, identical with the cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., reported by Roseberry in 1978; perpetuated by the Josephine County Surveyor's Office in 2019, as shown on the preliminary record dated November 14, 2019, not recorded at the time of this survey; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, in a mound of stone, 3 ft. base, to the top, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p>from which bearing trees reported by Roseberry</p> <ul style="list-style-type: none"> A fir, 16 ins. diam., bears N. 37° E., 51.5 ft. dist., with a healed blaze and a spike at the base on left side center. A fir, 21 ins. diam., bears N. 48° W., 45.5 ft. dist., with a healed blaze and a spike at the base on left side center. <p>and bearing trees mkd. by the Josephine County Surveyor's Office</p> <ul style="list-style-type: none"> A fir, 18 ins. diam., bears S. 88 1/4° E., 44.7 ft. dist., with illegible scribe marks visible on partially healed double blaze and a spike at the base on left side center. A fir, 11 ins. diam., bears S. 21 1/4° W., 27.1 ft. dist., with illegible scribe marks visible on partially healed double blaze and a spike at the base on left side center. <p>N. 74° 58' 08" E., on line 1-2 of William Ruble Placer, Mineral Survey No. 233.</p> <p>364.02 From this point, a point established by Josephine County Public Works in 1968, in an unrecorded survey, as reported by Owen, PLS No. 424, in 1989, bears South, 2.48 ft. dist.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 1 in. above the ground.</p> <p>795.52 From this point, a point established by Josephine County Public Works in 1968, in an unrecorded survey, as reported by Owen, PLS No. 424, in 1989, bears South, 5.36 ft. dist.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 1 in. above the ground.</p>

Dependent Resurvey of a Portion of Mineral Survey No. 233,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
937.21	<p>From this point, a point established by Josephine County Public Works in 1968, in an unrecorded survey, as reported by Owen, PLS No. 424, in 1989, bears South, 6.36 ft. dist.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 1 in. above the ground.</p>
1481.78	<p>Point for Corner No. 2 of William Ruble Placer, Mineral Survey No. 233, determined at record bearing and dist. from the remains of a bearing tree reported by Roseberry in 1977-80</p> <p style="padding-left: 40px;">A rotted fir snag, 20 ins. diam., bears S. 15° W., 28.4 ft. dist., with a healed double blaze.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 20px 0;">  <p>MS 233 WR 2</p> <hr style="width: 50%; margin: 0 auto;"/> <p>S19 2021</p> </div> <p>and new accessories</p> <p style="padding-left: 40px;">A maple, 6 ins. diam., bears S. 39 3/4° E., 10.5 ft. dist., mkd. X at breast height and BT at the base.</p> <p style="padding-left: 40px;">An iron rod, 24 ins. long, 5/8 in. diam., set 23 ins. in the ground, for a reference monument, bears S. 40° 50' 15" W., 24.70 ft. dist., with aluminum cap mkd. RM MS 233 WR 2 24.70 FT TO COR 2021 and an arrow pointing to the cor.</p> <p>The iron rod and iron post set by Roseberry were not recovered. The cor. is located on the left bank of Coyote Creek, 10 ft. wide, course N. 80° W.</p>
1251.40	<p>S. 82° 58' 02" E., on line 2-3 of William Ruble Placer, Mineral Survey No. 233.</p> <p>Corner No. 3 of William Ruble Placer, Mineral Survey No. 233, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, in a mound of stone, 3 ft. base, to the top, with brass cap mkd.</p> <div style="text-align: center; margin: 20px 0;">  <p>MS 233 WR 3</p> <hr style="width: 50%; margin: 0 auto;"/> <p>S19 1977</p> </div> <p>from which the remains of bearing trees reported by Roseberry</p>

**Dependent Resurvey of a Portion of Mineral Survey No. 233,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET

A fir stump, 16 ins. diam., bears N. 3 1/2° E., 71.9 ft. dist., with a healed blaze.

A fir, 21 ins. diam., bears West, 12.2 ft. dist., with a healed blaze.

and a new bearing tree

A fir, 10 ins. diam., bears S. 35 1/4° E., 44.3 ft. dist., mkd. X at breast height and BT at the base.

From this cor., a point reported by Roseberry, bears S. 17° 16' 00" W., 22.11 ft. dist.; monumented with an iron rod, 5/8 in. diam. (Record, 1/2 in. diam.), firmly set, projecting 4 ins. above the ground.

**Dependent Resurvey of a Portion of Mineral Survey No. 319,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

Restoring the 1897 survey by Peter Applegate

From Corner No. 1 of Marshall Quartz Claim, Mineral Survey No. 319, perpetuated by the BLM during an administrative survey in 1978; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, in the scattered remains of the original mound of stone, from which bearing trees mkd. by the BLM

A fir, 23 ins. diam., bears N. 76° E., 6.0 ft. dist., with a healed blaze. Add scribe marks S22 BT on new blaze and drive a Mag Nail at the base on right side center.

A fir, 17 ins. diam., bears S. 30 1/2° W., 6.3 ft. dist., with a healed blaze. Add scribe marks X at breast height and BT at the base on new blazes and drive a Mag Nail at the base on right side center.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the iron rod, in a collar of stone, with brass cap mkd.

S22



COR 1
ML
MS 319

2021

From this cor., the 1/4 sec. cor. of secs. 21 and 22, bears N. 0° 55' 23" W., 1007.46 ft. dist., hereinbefore described.

N. 88° 25' 05" E., on line 1-2 of Marshall Quartz Claim, Mineral Survey No. 319.

Dependent Resurvey of a Portion of Mineral Survey No. 319,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
1324.26	<p>Intersect the N. and S. center line of the SW 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 21 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;">  </div>
1453.69	<p>Corner No. 2 of Marshall Quartz Claim, Mineral Survey No. 319, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 2007, recorded in C.S. Book 10, page 125; from original evidence no longer in existence; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>COUNTY SURVEYOR T 33 S R 5 W MS 319</p>  </div> <p>from which a bearing tree mkd. by the BLM</p> <p style="padding-left: 40px;">A madrone, 17 ins. diam., bears S. 10 1/2° E., 42.6 ft. dist., with no marks visible on partially healed blaze and a spike at the base of the blaze.</p> <p>and bearing trees mkd. by the Josephine County Surveyor's Office</p> <p style="padding-left: 40px;">A fir, 6 ins. diam., bears S. 59° E., 14.1 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A fir, 15 ins. diam., bears S. 38 1/4° W., 7.2 ft. dist., with a healed blaze.</p>
291.97	<p>S. 2° 31' 44" E., on line 2-3 of Marshall Quartz Claim, Mineral Survey No. 319.</p> <p>The middle lode cor. on line 2-3 of Marshall Quartz Claim, Mineral Survey No. 319, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 2007, recorded in C.S. Book 10, page 126; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p>



Dependent Resurvey of a Portion of Mineral Survey No. 319,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p style="text-align: center;">COUNTY SURVEYOR T 33 S R 5 W MS 319 MLE 2007</p> <p>from which an original bearing tree</p> <p style="padding-left: 40px;">A black oak, 29 ins. diam., bears N. 56 3/4° W., 71.0 ft. dist., with a healed double blaze. (Record, N. 54° W.)</p> <p>and bearing trees mkd. by the Josephine County Surveyors Office</p> <p style="padding-left: 40px;">A cedar, 16 ins. diam., bears S. 35° W., 36.2 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A fir, 10 ins. diam., bears N. 28° W., 12.8 ft. dist., with a healed blaze.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 1° 51' 54" E., beginning new measurement.</p>
59.81	<p>Intersect the E. and W. center line of the SW 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">ML S 22 S ————— S MS 319 2021</p>
301.73	<p>Corner No. 3 of Marshall Quartz Claim, Mineral Survey No. 319, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 2007, recorded in C.S. Book 10, page 150; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">COUNTY SURVEYOR T 33 S R 5 W MS 319 COR NO. 3 2007</p> <p>from which the remains of the original bearing trees</p> <p style="padding-left: 40px;">A rotted pine snag, size indeterminate, bears N. 70 1/2° E., 34.0 ft. dist., with scribe marks MS ML BT visible on decayed blaze.</p>

Dependent Resurvey of a Portion of Mineral Survey No. 319,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET																			
	<p>A rotted cedar stump, 36 ins. diam., bears S. 86° W., 57.0 ft. dist., with no marks visible on open blaze.</p> <p>and bearing trees mkd. by the BLM</p> <p>A cedar, 20 ins. diam., bears S. 36 3/4° E., 10.4 ft. dist., with a healed blaze.</p> <p>A cedar, 18 ins. diam., bears N. 85 3/4° W., 39.7 ft. dist., with a healed blaze.</p> <p>and bearing trees mkd. by the Josephine County Surveyor's Office</p> <p>A cedar, 12 ins. diam., bears S. 11 1/4° W., 39.3 ft. dist., with scribe marks CS CR NO 3 B visible on partially healed double blaze.</p> <p>A cedar, 10 ins. diam., bears N. 81 1/4° W., 29.3 ft. dist., with illegible scribe marks visible on partially healed double blaze.</p> <p>From this cor., a point established by person(s) unknown, for an unknown purpose, bears S. 61° 18' 40" E., 6.41 ft. dist.; monumented with a cedar post, 4 x 4 ins., loosely set, projecting 3 ft. above the ground, in a collar of stone, and was not utilized for control in this survey.</p>																		
	<p>S. 88° 36' 38" W., on line 3-4 of Marshall Quartz Claim, Mineral Survey No. 319.</p>																		
150.03	<p>Intersect the N. and S. center line of the SW 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td></td> <td>W</td> <td></td> </tr> <tr> <td>ML</td> <td> </td> <td>MS 319</td> </tr> <tr> <td colspan="3" style="border-top: 1px solid black;"></td> </tr> <tr> <td></td> <td>S</td> <td>22</td> </tr> <tr> <td></td> <td>W</td> <td></td> </tr> <tr> <td></td> <td>2021</td> <td></td> </tr> </table> </div>		W		ML		MS 319					S	22		W			2021	
	W																		
ML		MS 319																	
	S	22																	
	W																		
	2021																		
1459.03	<p>Corner No. 4 of Marshall Quartz Claim, Mineral Survey No. 319, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 2007, recorded in C.S. Book 10, page 151; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, in a collar of stone, with brass cap mkd.</p>																		

Dependent Resurvey of a Portion of Mineral Survey No. 319,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p style="text-align: center;">COUNTY SURVEYOR T 33 S R 5 W MS 319</p> <div style="text-align: center;">  </div> <p style="text-align: center;">2007</p> <p>from which the remains of the original bearing trees</p> <p>A ponderosa pine, 21 ins. diam., bears N. 45° E., 17.5 ft. dist., with illegible scribe marks visible on partially healed blaze.</p> <p>A roothole bears N. 88 1/2° W., 12.5 ft. dist., alongside of which is an uprooted, rotted, ponderosa pine stump, size indeterminate, with scribe marks BT visible on decayed blaze.</p> <p>and a bearing tree mkd. by the BLM</p> <p>A ponderosa pine, 16 ins. diam., bears S. 13 1/2° W., 8.4 ft. dist., with a healed blaze.</p> <p>and a bearing tree mkd. by the Josephine County Surveyor's Office</p> <p>A fir, 14 ins. diam., bears S. 21 1/2° E., 13.8 ft. dist., with a healed double blaze.</p>
	<p>N. 1° 42' 55" W., on line 4-1 of Marshall Quartz Lode, Mineral Survey No. 319.</p>
274.30	<p>Intersect the E. and W. center line of the SW 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;">  </div>
292.52	<p>The middle lode cor. on line 4-1 of Marshall Quartz Claim, Mineral Survey No. 319, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 2007, recorded in C.S. Book 10, page 154; monumented with an iron post, 2 ins. diam., firmly set, projecting 11 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>COUNTY SURVEYOR T 33 S R 5 W MS 319 MLW 2007</p> </div>

**Dependent Resurvey of a Portion of Mineral Survey No. 319,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p>from which the remains of an original bearing tree</p> <p>A rotted ponderosa pine stump, size indeterminate, bears N. 76° W., 94.0 ft. dist., with scribe marks BT visible on open blaze.</p> <p>and bearing trees mkd. by the BLM and mkd. again by the Josephine County Surveyor's Office</p> <p>A ponderosa pine, 29 ins. diam., bears S. 54° E., 35.4 ft. dist., with no marks visible on partially healed double blaze.</p> <p>A fir, 11 ins. diam., bears S. 79° W., 34.5 ft. dist., with a healed double blaze.</p> <hr/> <p>N. 1° 38' 57" W., beginning new measurement.</p>
296.24	<p>Corner No. 1 of Marshall Quartz Claim, Mineral Survey No. 319.</p> <hr/> <p align="center">Dependent Resurvey of a Portion of Mineral Survey No. 789, T. 33 S., R. 5 W., Willamette Meridian, Oregon</p> <hr/> <p align="center">Restoring the 1916 survey by Horace C. Hall and the 2010-11 resurvey by Arthur R. Rambo</p> <hr/> <p>From Corner No. 1 of G. & A. Lode, Mineral Survey No. 789, monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, in a collar of stone, with brass cap and accessories as described in the official record of the 2010-11 survey by Rambo.</p> <p>From this cor., the 1/4 sec. cor. of secs. 22 and 23, bears S. 81° 37' 19" W., 359.65 ft. dist., hereinbefore described.</p> <p>N. 44° 49' 31" W., on line 1-2 of G. & A. Lode, Mineral Survey No. 789.</p>
507.43	<p>Intersect the line bet. secs. 22 and 23, hereinbefore described.</p>
598.81	<p>Corner No. 2 of G. & A. Lode, Mineral Survey No. 789, monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, in a collar of stone, with brass cap and accessories as described in the official record of the 2010-11 survey by Rambo.</p> <hr/> <p>S. 40° 27' 40" W., on line 2-3 of G. & A. Lode, Mineral Survey No. 789.</p>
627.05	<p>Intersect the E. and W. center line of sec. 22.</p> <p>Drive an iron rod, 30 ins. long, 5/8 in. diam., 27 ins. in the ground, with aluminum cap mkd.</p>

**Dependent Resurvey of a Portion of Mineral Survey No. 789,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
835.95	<div data-bbox="828 289 1015 415" style="text-align: center;"> </div> <p>Corner No. 3 of G. & A. Lode, Mineral Survey No. 789, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 1979, recorded in C.S. Book 7, page 119; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p align="center">COUNTY SURVEYOR 3 - 789 G. A. 1979</p> <p>from which bearing trees mkd. by the BLM and mkd. again by the Josephine County Surveyor's Office</p> <p style="padding-left: 40px;">An oak, 9 ins. diam., bears S. 41 3/4° E., 9.1 ft. dist., with a healed double blaze.</p> <p style="padding-left: 40px;">An oak, 7 ins. diam., bears N. 69 1/4° W., 20.3 ft. dist., with a healed double blaze.</p> <p>and a bearing tree mkd. by the Josephine County Surveyor's Office</p> <p style="padding-left: 40px;">An oak, 8 ins. diam., bears N. 27° W., 5.6 ft. dist., with illegible scribe marks visible on partially healed double blaze.</p> <p>Found the original stone, 12 x 12 x 24 ins., alongside the iron post, with no marks visible, and buried alongside the iron post.</p> <hr/> <p>S. 33° 24' 36" W., on line 3-4 of G. & A. Lode, Mineral Survey No. 789.</p>
665.73	<p>Corner No. 4 of G. & A. Lode, Mineral Survey No. 789, on line 1-2 of the Portland Lode, Mineral Survey No. 789, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 1979, recorded in C.S. Book 7, page 121; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p align="center">COUNTY SURVEYOR 4 - 789 G. A. 1979</p> <p>from which bearing trees mkd. by the BLM and mkd. again by the Josephine County Surveyor's Office</p>


**Dependent Resurvey of a Portion of Mineral Survey No. 789,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p>A fir, 30 ins. diam., bears S. 61 3/4° E., 8.8 ft. dist., with a healed double blaze.</p> <p>A madrone, 15 ins. diam., bears S. 79 1/4° W., 8.2 ft. dist., with illegible scribe marks visible on partially healed double blaze.</p> <p>and a bearing tree mkd. by the Josephine County Surveyor's Office</p> <p>A fir, 20 ins. diam., bears S. 86 1/4° W., 26.2 ft. dist., with a healed double blaze.</p> <p>Found the original stone, 8 x 8 x 24 ins., alongside the iron post, with no marks visible, and buried alongside the iron post.</p> <hr/> <p>N. 47° 48' 40" W., on a portion of line 2-1 of Portland Lode, Mineral Survey No. 789.</p>
281.19	<p>Corner No. 1 of Portland Lode, identical with Corner No. 1 of Josephine Lode, both part of Mineral Survey No. 789, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 1979, recorded in C.S. Book 7, page 121, and again in 2015, recorded in C.S. Book 12, page 29; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">COUNTY SURVEYOR J - 1 - 789 P - 1 - 789 1979</p> <p>from which an original bearing tree</p> <p>A cedar, 19 ins. diam., bears N. 31 1/2° E., 16.1 ft. dist., with a healed blaze and a spike at the base on left side center.</p> <p>and a bearing tree mkd. by the BLM and mkd. again by the Josephine County Surveyor's Office in 1979</p> <p>A cedar, 13 ins. diam., bears S. 71 1/2° W., 7.3 ft. dist., with a healed double blaze and a spike at the base on right side center.</p> <p>and bearing trees mkd. by the Josephine County Surveyor's Office in 1979</p> <p>A cedar, 16 ins. diam., bears S. 66 1/2° E., 20.0 ft. dist., with a healed double blaze and a spike at the base on left side center.</p> <p>A cedar, 16 ins. diam., bears S. 50 3/4° W., 31.5 ft. dist., with scribe marks 789 BT visible on partially healed double blaze and a spike at the base on right side center.</p>

**Dependent Resurvey of a Portion of Mineral Survey No. 789,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p>Found the original stone, 6 x 10 x 24 ins., alongside the iron rod, with chisel marks P-1 789 visible, and buried alongside the iron post.</p> <hr/> <p>N. 47° 27' 02" W., on line 1-2 of Josephine Lode, Mineral Survey No. 789.</p>
209.69	<p>Intersect the N. and S. center line of the SE 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 21 ins. in the ground, with aluminum cap mkd.</p> <div data-bbox="846 625 980 835" style="text-align: center;"> </div>
559.65	<p>Corner No. 2 of Josephine Lode, Mineral Survey No. 789, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 1979, recorded in C.S. Book 7, page 122; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.</p> <p align="center">COUNTY SURVEYOR J - 2 - 789 1979</p> <p>from which the remains of an original bearing tree</p> <p style="padding-left: 40px;">A fir snag, 39 ins. diam., bears South, 2.5 ft. dist., with a healed blaze. (Record, the cor. is set against the N. side of the tree)</p> <p>and a bearing tree mkd. by the BLM and mkd. again by the Josephine County Surveyor's Office</p> <p style="padding-left: 40px;">A cedar, 29 ins. diam., bears N. 47 1/4° W., 18.4 ft. dist., with illegible scribe marks visible on partially healed double blaze.</p> <p>and a bearing tree mkd. by the Josephine County Surveyor's Office</p> <p style="padding-left: 40px;">A fir, 37 ins. diam., bears N. 88 3/4° W., 18.6 ft. dist., with a healed double blaze.</p> <hr/> <p>S. 41° 44' 11" W., on line 2-3 of Josephine Lode, Mineral Survey No. 789.</p>
1511.65	<p>Corner No. 3 of Josephine Lode, Mineral Survey No. 789, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 1979, recorded in C.S. Book 7, page 123; from original evidence no longer in existence; monumented with an</p>

Dependent Resurvey of a Portion of Mineral Survey No. 789,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

<p>FEET</p>	<p>iron post, 1 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">COUNTY SURVEYOR J - 3 - 789 1979</p> <p>from which bearing trees mkd. by the BLM and mkd. again by the Josephine County Surveyor's Office</p> <p style="padding-left: 40px;">A fir, 30 ins. diam., bears N. 64 3/4° E., 31.5 ft. dist., with a healed double blaze and a spike at the base on left side center.</p> <p style="padding-left: 40px;">A fir, 36 ins. diam., bears S. 35 1/2° W., 15.6 ft. dist., with a healed double blaze and a spike at the base on right side center.</p> <p>and a bearing tree mkd. by the Josephine County Surveyor's Office</p> <p style="padding-left: 40px;">A fir, 9 ins. diam., bears S. 9 1/2° E., 13.8 ft. dist., with a healed double blaze and a spike at the base on left side center.</p> <hr/>
<p>61.56</p>	<p>S. 47° 59' 43" E., on line 3-4 of Josephine Lode, Mineral Survey No. 789.</p> <p>Intersect the E. and W. center line of the SE 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 23 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;">  </div>
<p>562.17</p>	<p>Corner No. 4 of Josephine Lode, identical with Corner No. 4 of Portland Lode, both part of Mineral Survey No. 789, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 1979, recorded in C.S. Book 7, page 123; from original evidence no longer in existence; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 11 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">COUNTY SURVEYOR P - 4 - 789 J - 4 - 789 1979</p> <p>from which a bearing tree mkd. by the BLM</p> <p style="padding-left: 40px;">A fir, 41 ins. diam., bears S. 64 1/4° W., 39.4 ft. dist., with a healed blaze. Add scribe marks X at breast height and BT at the base on new blazes and drive a Mag Nail at the base on right side center.</p>

**Dependent Resurvey of a Portion of Mineral Survey No. 789,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p>and a bearing tree mkd. by the BLM and mkd. again by the Josephine County Surveyor's Office</p> <p>A cedar, 33 ins. diam., bears N. 75 3/4° W., 12.6 ft. dist., with a healed double blaze.</p>
247.11	<p>S. 47° 45' 53" E., on line 4-3 of Portland Lode, Mineral Survey No. 789.</p> <p>Intersect the N. and S. center line of the SW 1/4 of the SE 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 21 ins. in the ground, with aluminum cap mkd.</p> <div data-bbox="841 722 1024 932" style="text-align: center;"> </div>
488.94	<p>Intersect the E. and W. center line of the SW 1/4 of the SE 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <div data-bbox="792 1115 1024 1268" style="text-align: center;"> </div>
595.07	<p>Corner No. 3 of Portland Lode, Mineral Survey No. 789, perpetuated by the BLM during an administrative survey in 1978; subsequently perpetuated by the Josephine County Surveyor's Office in 1979, recorded in C.S. Book 7, page 122, and again in 2015, recorded in C.S. Book 12, page 24; from original evidence no longer in existence; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p align="center">COUNTY SURVEYOR P - 3 - 789 1979</p> <p>from which a bearing tree of unknown origin, reported by the BLM and the Josephine County Surveyor's Office</p> <p>A cedar, 16 ins. diam., bears S. 4 1/2° E., 11.8 ft. dist., with illegible scribe marks visible on partially healed blaze and a spike at the base on right side center.</p>

Dependent Resurvey of a Portion of Mineral Survey No. 789,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>and a bearing tree mkd. by the BLM</p> <p>A cedar, 6 ins. diam., bears S. 48 1/2° E., 21.7 ft. dist., with no marks visible on partially healed blaze and a spike at the base of the blaze.</p> <p>and the remains of bearing trees mkd. by the Josephine County Surveyor's Office</p> <p>A ponderosa pine, 28 ins. diam., bears S. 71° E., 30.3 ft. dist., with a healed double blaze and a spike at the base on right side center.</p> <p>A fir, 15 ins. diam., bears S. 49 1/2° E., 26.3 ft. dist., with a healed double blaze and a spike at the base on left side center.</p>
94.43	<p>N. 41° 52' 44" E., on line 3-2 of Portland Lode, Mineral Survey No. 789.</p> <p>Intersect the E. and W. center line of the SW 1/4 of the SE 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div data-bbox="792 961 1031 1115" data-label="Diagram"> </div>
610.01	<p>Intersect the N. and S. center line of the SE 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <div data-bbox="797 1297 982 1507" data-label="Diagram"> </div>
977.58	<p>Intersect the E. and W. center line of the SE 1/4 of sec. 22.</p> <p>Drive an iron rod, 24 ins. long, 5/8 in. diam., 23 ins. in the ground, with aluminum cap mkd.</p> <div data-bbox="776 1686 1015 1839" data-label="Diagram"> </div>

**Dependent Resurvey of a Portion of Mineral Survey No. 789,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

<p>FEET 1509.29</p>	<p>Corner No. 2 of Portland Lode, Mineral Survey No. 789, on line 4-5 of G. & A. Lode, Mineral Survey No. 789, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 1979, recorded in C.S. Book 7, page 120, and again in 2015, recorded in C.S. Book 12, page 27; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p align="center">COUNTY SURVEYOR P - 2 - 789 1979</p> <p>from which a bearing tree mkd. by the BLM and mkd. again by the Josephine County Surveyor's Office in 2015</p> <p style="padding-left: 40px;">A fir, 18 ins. diam., bears N. 19 1/2° E., 21.3 ft. dist., with a healed double blaze and a spike at the base on right side center.</p> <p>and bearing trees mkd. by the Josephine County Surveyor's Office in 1979</p> <p style="padding-left: 40px;">A cedar, 15 ins. diam., bears S. 74° E., 12.0 ft. dist., with a healed double blaze and a spike at the base on right side center.</p> <p style="padding-left: 40px;">A cedar, 22 ins. diam., bears N. 46° W., 49.9 ft. dist., with a healed double blaze and a spike at the base on left side center.</p> <p>Found the original stone, 10 x 10 x 24 ins., with no marks visible, alongside the iron post, and buried alongside the iron post.</p> <hr/> <p>S. 47° 08' 32" E., on a portion of line 4-5 of G. & A. Lode, Mineral Survey No. 789.</p>
<p>124.45</p>	<p>Corner No. 5 of G. & A. Lode, Mineral Survey No. 789, perpetuated by the BLM during an administrative survey in 1978; and subsequently perpetuated by the Josephine County Surveyor's Office in 1979, recorded in C.S. Book 7, page 120; monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p align="center">COUNTY SURVEYOR 5 - 789 G. A. 1979</p> <p>from which an original bearing tree</p> <p style="padding-left: 40px;">A fir, 17 ins. diam., bears S. 57 1/4° W., 29.0 ft. dist., with a healed blaze. (Record, S. 54° 52' W.)</p> <p>and bearing trees mkd. by the Josephine County Surveyor's Office</p> <p style="padding-left: 40px;">A cedar, 30 ins. diam., bears S. 0 1/2° W., 24.4 ft. dist., with a healed double blaze.</p>

**Dependent Resurvey of a Portion of Mineral Survey No. 789,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	A fir, 24 ins. diam., bears S. 43 1/2° W., 45.9 ft. dist., with a healed double blaze.
	N. 37° 06' 24" E., on line 5-6 of G. & A. Lode, Mineral Survey No. 789.
588.23	Corner No. 6 of G. & A. Lode, Mineral Survey No. 789, monumented with an iron post, 1 1/2 ins. diam., firmly set, projecting 9 ins. above the ground, with brass cap and accessories as described in the official record of the 2010-11 survey by Rambo.
	N. 47° 19' 47" E., on line 6-1 of G. & A. Lode, Mineral Survey No. 789.
393.68	Intersect the line bet. Secs. 22 and 23, hereinbefore described.
878.94	Corner No. 1 of G. & A. Lode, Mineral Survey No. 789.
<p>Dependent Resurvey of Subdivision of Section Lines of Section 21, T. 33 S., R. 5 W., Willamette Meridian, Oregon</p>	
<p>Restoring the 1977-80 subdivision by Lynn M. Roseberry</p>	
From the 1/4 sec. cor. of secs. 21 and 22, hereinbefore described.	
N. 89° 55' 16" W., on the E. and W. center line of sec. 21.	
1334.83	The center E 1/16 sec. cor. of sec. 21, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.
$\begin{array}{c} \text{E } 1/16 \\ \text{C} \text{-----} \text{C} \\ \text{S } 21 \\ 1977 \end{array}$	
from which bearing trees reported by Roseberry	
A fir, 15 ins. diam., bears N. 61° E., 5.9 ft. dist., with a healed blaze.	
A fir, 19 ins. diam., bears S. 16° W., 17.8 ft. dist., with a healed blaze.	
1324.43	N. 0° 10' 10" W., on the N. and S. center line of the NE 1/4 of sec. 21. The NE 1/16 sec. cor. of sec. 21, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.

**Dependent Resurvey of Subdivision of Section Lines of Section 21,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	<p align="center">NE 1/16 S 21 1977</p> <p>from which bearing trees reported by Roseberry</p> <p style="padding-left: 40px;">A fir, 17 ins. diam., bears S. 20 1/2° E., 38.0 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A fir, 21 ins. diam., bears N. 62° W., 14.9 ft. dist., with a healed blaze.</p> <hr/> <p>From the N 1/16 sec. cor. of secs. 21 and 22, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <p align="center">N 1/16 S 21 S 22 1977</p> <p>from which bearing trees reported by Roseberry</p> <p style="padding-left: 40px;">A fir, 12 ins. diam., bears S. 35° E., 11.9 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A fir, 32 ins. diam., bears N. 64° W., 45.5 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">N. 89° 46' 52" W., on the E. and W. center line of the NE 1/4 of sec. 21.</p>
1346.40	<p>The NE 1/16 sec. cor. of sec. 21.</p> <hr/> <p align="center">Subdivision of Section 2, T. 33 S., R. 5 W., Willamette Meridian, Oregon</p> <hr/> <p>From the 1/4 sec. cor. of secs. 2 and 11, reported by Nickerson in 1986-89; perpetuated by Quimby, PLS No. 1654, in 2015, filed in the Douglas County Surveyor's Office under M166-39; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <p align="center">T 33 S R 5 W S 2 1/4 ——— S 11 1974</p> <p>from which bearing trees reported by Nickerson</p> <p style="padding-left: 40px;">A fir, 43 ins. diam., bears N. 27 1/2° E., 35.0 ft. dist., with a healed blaze and illegible scribe marks visible on bark. (Original)</p> <p style="padding-left: 40px;">A fir, 22 ins. diam., bears N. 52° E., 19.8 ft. dist., with a healed double blaze.</p>

**Subdivision of Section 2,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p>A fir, 40 ins. diam., bears S. 41° W., 29.0 ft. dist., with a healed blaze. (Original)</p> <p>and a bearing tree mkd. by Quimby</p> <p>A fir, 16 ins. diam., bears N. 19 1/4° W., 23.3 ft. dist., with a healed blaze. N. 0° 11' 54" E., on the N. and S. center line of sec. 2.</p>
2614.29	<p>The center 1/4 sec. cor. of sec. 2, established by Irving, Douglas County Deputy Surveyor, in 1930; perpetuated by DeGroot, PLS No. 1941, in 2000; utilized by Quimby PLS No. 1654, in 2015, filed in the Douglas County Surveyor's Office M166-39; verified utilizing the data from the private survey records referenced and the measurements of this survey; and is accepted as the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, with top flush with the surface of the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W C 1/4 S 2 1999 PLS 1941</p> <p>from which the remains of bearing trees mkd. by Irving</p> <p>A rotted fir stump, 40 ins. diam., bears S. 88° E., 59.8 ft. dist., with no marks visible on open blaze.</p> <p>A fir, 37 ins. diam., bears N. 87 1/2° W., 23.0 ft. dist., with no marks visible on open blaze.</p> <p>and accessories established by DeGroot</p> <p>A fir, 17 ins. diam., bears N. 27° E., 26.5 ft. dist., with a healed double blaze.</p> <p>A fir, 24 ins. diam., bears S. 25 3/4° E., 40.2 ft. dist., with a healed double blaze.</p> <p>An iron rod, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, bears S. 26° 11' 52" W., 24.95 ft. dist., with yellow plastic cap mkd. BTS ENG.SURV.</p> <p>An iron rod, 5/8 in. diam., firmly set, with top 6 ins. below the surface of the ground, bears N. 25° 41' 57" W., 25.00 ft. dist., with yellow plastic cap mkd. BTS ENG.SURV.</p> <p>The iron pipe set by Irving was not recovered.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 08' 33" W., beginning new measurement.</p>

**Subdivision of Section 2,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET 2735.86	<p>The 1/4 sec. cor. of sec. 2 only, on the N. bdy. of the Tp.</p> <hr/> <p style="text-align: center;">Subdivision of Section 4, T. 33 S., R. 5 W., Willamette Meridian, Oregon</p> <hr/> <p>From the 1/4 sec. cor. of secs. 3 and 4.</p> <p>S. 89° 28' 25" W., on the E. and W. center line of sec. 4.</p>
2729.91	<p>Point selected for a Witness Point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p style="margin: 0;">WP C ——— C S 4 2022</p> </div> <p>from which</p> <p style="padding-left: 40px;">A fir, 14 ins. diam., bears S. 40 1/4° E., 27.8 ft. dist., mkd. WP S4 BT.</p> <p style="padding-left: 40px;">A fir, 6 ins. diam., bears S. 51° W., 17.5 ft. dist., mkd. X at breast height and BT at the base.</p>
5408.78	<p>The 1/4 sec. cor. of secs. 4 and 5.</p> <hr/> <p style="text-align: center;">Subdivision of Section 9, T. 33 S., R. 5 W., Willamette Meridian, Oregon</p> <hr/> <p>From the 1/4 sec. cor. of secs. 9 and 16.</p> <p>N. 0° 59' 19" E., on the N. and S. center line of sec. 9.</p>
1342.89	<p>Point for the center S 1/16 sec. cor. of sec. 9. Not monumented.</p> <p>From this point, a point established as the center S 1/16 sec. cor. of sec. 9 by the BLM during an administrative survey in 1977, bears N. 8° 35' 03" W., 3.69 ft. dist. This point was established without federal or state authority and was not utilized for control in the course of this survey; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 5 ins. above the ground, from which bearing trees mkd. by the BLM</p> <p style="padding-left: 40px;">A fir, 12 ins. diam., bears N. 75° E., 8.2 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A fir, 12 ins. diam., bears S. 32 1/2° E., 23.3 ft. dist., with a healed blaze.</p>

Subdivision of Section 9,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
2685.78	<p>Point for the center 1/4 sec. cor. of sec. 9, at intersection with the E. and W. center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W C 1/4 S 9 2021</p> <p>from which</p> <p style="padding-left: 40px;">A fir, 36 ins. diam., bears N. 40 1/2° E., 34.2 ft. dist., mkd. C 1/4 S9 BT.</p> <p style="padding-left: 40px;">A fir, 14 ins. diam., bears N. 56 1/4° W., 45.7 ft. dist., mkd. X at breast height and BT at the base.</p> <p>From this cor., a point established as the center 1/4 sec. cor. of sec. 9 by the BLM during an administrative survey in 1977, bears N. 0° 09' 53" W., 4.66 ft. dist. This point was established without federal or state authority and was not utilized for control in the course of this survey; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 7 ins. above the ground, in a collar of stone, from which the remains of bearing trees mkd. by the BLM</p> <p style="padding-left: 40px;">A rotted fir stump, size indeterminate, bears N. 22 3/4° E., 15.4 ft. dist., no marks visible.</p> <p style="padding-left: 40px;">A rotted fir stump, 29 ins. diam., bears S. 0 1/2° E., 9.6 ft. dist., with a healed blaze.</p> <p>Remove the iron rod and deposit inside the stainless steel post.</p> <p>Also from this cor., a point established by person(s) unknown, for an unknown purpose, bears S. 0° 21' 13" E., 35.92 ft. dist.; monumented with an iron pipe, 1/2 in. diam., loosely set, projecting 20 ins. above the ground, in a collar of stone, and was not utilized for control in the course of this survey.</p>
5372.06	<p>The 1/4 sec. cor. of secs. 4 and 9, reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, in a mound of stone, 2 1/2 ft. base, to the top, with a brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W S 4 1/4 ——— S 9 1980</p> <p>from which bearing trees reported by Roseberry</p> <p style="padding-left: 40px;">A fir, 58 ins. diam., bears N. 45° E., 3.3 ft. dist., with a healed blaze. (Original)</p>

Subdivision of Section 9,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>A madrone, 14 ins. diam., bears S. 4° W., 13.9 ft. dist., with no marks visible on open and rotted blaze.</p> <p>A madrone, 14 ins. diam., bears N. 70° W., 27.1 ft. dist., with a healed blaze.</p>
	<p>From the 1/4 sec. cor. of secs. 9 and 10.</p>
	<p>N. 89° 55' 26" W., on the E. and W. center line of sec. 9.</p>
2676.50	<p>The center 1/4 sec. cor. of sec. 9.</p>
3361.11	<p>Point for the center E-W 1/64 sec. cor. of sec. 9. Not monumented.</p> <p>From this cor., a point erroneously established as the center E-W 1/64 sec. cor. of sec. 9 by Lawrence, PE No. 1543, in 1953 bears S. 0° 39' 39" E., 25.11 ft. dist. This point was established using improper procedures and was not accepted for the cor. or utilized for control in the course of this survey; monumented with an iron pipe, 3/4 in. diam., firmly set, projecting 12 ins. above the ground, from which a bearing tree mkd. by Lawrence</p>
	<p>A cedar, 27 ins. diam., bears N. 20 1/2° W., 16.9 ft. dist., with a healed blaze.</p>
4045.72	<p>Point for the center W 1/16 sec. cor. of sec. 9.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>W 1/16</p> <p>C ————— C</p> <p>S 9</p> <p>2021</p> </div>
	<p>from which bearing trees mkd. by the BLM during an administrative survey in 1977</p>
	<p>A fir, 17 ins. diam., bears N. 30 1/2° E., 6.2 ft. dist., with a healed blaze. Add scribe marks CW 1/16 S9 BT on new blaze and drive a Mag Nail at the base on right side center.</p>
	<p>A black oak, 22 ins. diam., bears N. 57° W., 9.4 ft. dist., with a healed blaze. Add scribe marks CW 1/16 S9 BT on new blaze and drive a Mag Nail at the base on right side center.</p>
	<p>From this cor., a point erroneously established as the center W 1/16 sec. cor. of sec. 9 by Lawrence, PE No. 1543, in 1953 bears S. 10° 15' 30" E., 16.08 ft. dist. This point was established using improper procedures and was not accepted for the cor. or utilized for control in the course of this survey; monumented with an iron pipe, 3/4 in. diam., firmly set, projecting 12 ins. above the ground, from which a bearing tree mkd. by Lawrence</p>

Subdivision of Section 9,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>A black oak, 16 ins. diam., bears N. 86 1/4° W., 31.5 ft. dist., with a healed blaze.</p> <p>Also from this cor., a point established as the center W 1/16 sec. cor. of sec. 9 by the BLM during an administrative survey in 1977, bears N. 6° 56' 50" W., 2.11 ft. dist. This point was established without federal or state authority and was not utilized for control in the course of this survey; monumented with an iron rod, 5/8 in. diam., firmly set, with top flush with the surface of the ground.</p> <p>Remove the iron rod and deposit inside the stainless steel post.</p>
5414.94	<p>The 1/4 sec. cor. of secs. 8 and 9.</p> <hr/>
	<p>From the W 1/16 sec. cor. of secs. 9 and 16.</p> <p>N. 0° 15' 51" E., on the N. and S. center line of the SW 1/4 of sec. 9.</p>
1344.27	<p>Point for the SW 1/16 sec. cor. of sec. 9, at intersection with the E. and W. center line of the SW 1/4.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">SW 1/16 S 9 2021</p> <p>from which</p> <p>A cedar, 9 ins. diam., bears S. 82 3/4° W., 8.1 ft. dist., mkd. SW 1/16 S9 BT.</p> <p>A cedar, 7 ins. diam., bears N. 30 1/2° W., 11.9 ft. dist., mkd. X at breast height and BT at the base.</p> <p>From this cor., a point established as the SW 1/16 sec. cor. of sec. 9 by the BLM during an administrative survey in 1977, bears N. 27° 04' 37" E., 4.24 ft. dist. This point was established without federal or state authority and was not utilized for control in the course of this survey; monumented with an iron rod, 5/8 in. diam., firmly set, with top flush with the surface of the ground, from which bearing trees mkd. by the BLM</p> <p>A madrone, 27 ins. diam., bears N. 2° E., 169.2 ft. dist., no marks visible.</p> <p>A fir, 38 ins. diam., bears N. 15 1/4° W., 121.7 ft. dist., with a healed blaze.</p> <p>Remove the iron rod and deposit inside the stainless steel post.</p>
2686.13	<p>The center W 1/16 sec. cor. of sec. 9.</p> <hr/>

**Subdivision of Section 9,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	<p>From the center S 1/16 sec. cor. of sec. 9.</p> <p>N. 89° 53' 14" W., on the E. and W. center line of the SW 1/4 of sec. 9.</p>
1352.32	<p>The SW 1/16 sec. cor. of sec. 9.</p>
2715.53	<p>The S 1/16 sec. cor. of secs. 8 and 9.</p>
<hr/> <p>Subdivision of Section 12, T. 33 S., R. 5 W., Willamette Meridian, Oregon</p> <hr/>	
2610.44	<p>From the 1/4 sec. cor. of secs. 12 and 13.</p> <p>N. 2° 56' 40" E., on the N. and S. center line of sec. 12.</p> <p>Point for the center 1/4 sec. cor. of sec. 12, at intersection with the E. and W. center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W C 1/4 S 12 2021</p> <p>from which</p> <p style="padding-left: 40px;">A fir, 13 ins. diam., bears S. 34° E., 23.9 ft. dist., mkd. C 1/4 S12 BT.</p> <p style="padding-left: 40px;">A fir, 15 ins. diam., bears S. 85 1/2° W., 20.5 ft. dist., mkd. X at breast height and BT at the base.</p>
5294.96	<p>The 1/4 sec. cor. of secs. 1 and 12, reported by Roseberry in 1970, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W S 1 1/4 ——— S 12 1966</p> <p>from which the remains of bearing trees reported by Roseberry</p> <p style="padding-left: 40px;">A fir, 16 ins. diam., bears N. 3° E., 12.5 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A fir snag, 17 ins. diam., bears N. 43° E., 14.0 ft. dist., with no marks visible on open blaze. (Original) (Record, 15.2 ft.)</p>

Subdivision of Section 12,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	<p>A fir, 16 ins. diam., bears S. 5° W., 26.3 ft. dist., with a healed blaze. (Record, 27.7 ft.)</p> <p>A fir, 16 ins. diam., bears S. 39° W., 9.2 ft. dist., with a healed blaze. (Original)</p> <hr/> <p>From the 1/4 sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp., reported by Roseberry in 1977-80, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, in a mound of stone, 3 ft. base, to the top, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W 1/4 R 4 W S 12 S 7 1980</p> <p>from which bearing trees reported by Roseberry</p> <p>A cedar, 9 ins. diam., bears N. 79 1/2° E., 12.0 ft. dist., with scribe mark S visible on partially open blaze. (Original) (Record, N. 73° E., 12.5 ft.)</p> <p>A fir, 34 ins. diam., bears S. 10° W., 25.7 ft. dist., with a healed blaze. (Record, S. 21 1/2° W.)</p> <p>S. 89° 49' 41" W., on the E. and W. center line of sec. 12.</p>
2660.26	The center 1/4 sec. cor. of sec. 12.
4065.02	<p>Point for the center W 1/16 sec. cor. of sec. 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">W 1/16 C ——— C S 12 2021</p> <p>from which</p> <p>A yew, 18 ins. diam., bears N. 66° E., 15.9 ft. dist., mkd. CW 1/16 S12 BT.</p> <p>A fir, 16 ins. diam., bears S. 32 1/2° W., 18.1 ft. dist., mkd. CW 1/16 S12 BT.</p>
5469.78	The 1/4 sec. cor. of secs. 11 and 12, reported by Nickerson in 1986-89, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd.

**Subdivision of Section 12,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	T 33 S R 5 W 1/4 S 11 S 12 1974
	from which the remains of bearing trees reported by Nickerson A cedar, 31 ins. diam., bears S. 77° E., 18.8 ft. dist., with a healed blaze. A fir snag, 27 ins. diam., bears S. 54° E., 17.8 ft. dist., with a healed blaze. (Original) A cedar, 28 ins. diam., bears N. 57 1/2° W., 94.7 ft. dist., with a healed blaze. A rotted cedar snag, size indeterminate, bears N. 22° W., 21.8 ft. dist., no marks visible. (Original)
	<hr/> From the W 1/16 sec. cor. of secs. 12 and 13. N. 1° 22' 13" E., on the N. and S. center line of the SW 1/4 of sec. 12.
2624.60	The center W 1/16 sec. cor. of sec. 12.
	<hr/> N. 1° 21' 38" E., on the N. and S. center line of the NW 1/4 of sec. 12.
2687.31	The W 1/16 sec. cor. of secs. 1 and 12, reported by Roseberry in 1970, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd.
	S 1 W 1/16 ——— S 12 1970
	from which bearing trees reported by Roseberry A fir, 17 ins. diam., bears N. 27° E., 19.8 ft. dist., with a healed blaze. A fir, 15 ins. diam., bears S. 48° W., 42.6 ft. dist., with a healed blaze.
	<hr/> Subdivision of Section 22, T. 33 S., R. 5 W., Willamette Meridian, Oregon <hr/>
	From the 1/4 sec. cor. of secs. 22 and 27. N. 0° 19' 59" W., on the N. and S. center line of sec. 22.

Subdivision of Section 22,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
658.07	<p>Point for the center S-S 1/64 sec. cor. of sec. 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S 22 C-S-S 1/64 2021</p> <p>from which</p> <p style="padding-left: 40px;">A cedar, 4 ins. diam., bears N. 81 1/2° E., 7.8 ft. dist., mkd. X at breast height and BT at the base.</p> <p style="padding-left: 40px;">A cedar, 10 ins. diam., bears N. 58 1/4° W., 34.0 ft. dist., mkd. CSS 1/64 S22 BT.</p>
1316.14	Point for the center S 1/16 sec. cor. of sec. 22. Not monumented.
2632.28	<p>Point for the center 1/4 sec. cor. of sec. 22, at intersection with the E. and W. center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W C 1/4 S 22 2021</p> <p>from which</p> <p style="padding-left: 40px;">A cedar, 4 ins. diam., bears N. 11 1/4° E., 26.7 ft. dist., mkd. X at breast height and BT at the base.</p> <p style="padding-left: 40px;">A cedar, 11 ins. diam., bears S. 77 1/2° W., 20.7 ft. dist., mkd. C 1/4 S22 BT.</p>
5253.38	<p>The 1/4 sec. cor. of secs. 15 and 22, reported by Aanrud in 1968; perpetuated by Hoffine, PLS No. 2291, in 2007; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W S 15 1/4 ——— S 22 1968</p> <p>from which a bearing tree reported by Aanrud</p>

**Subdivision of Section 22,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	
	<p>A fir, 22 ins. diam., bears S. 36 1/2° E., 17.8 ft. dist., with a healed blaze. (Original)</p> <p>and a bearing tree mkd. by Hoffine</p> <p>A fir, 16 ins. diam., bears N. 44 1/2° E., 39.4 ft. dist., with a healed blaze.</p> <hr/>
	<p>From the 1/4 sec. cor. of secs. 22 and 23.</p> <p>N. 89° 59' 52" W., on the E. and W. center line of sec. 22.</p>
473.24	Intersect line 2-3 of G. & A. Lode, Mineral Survey No. 789, hereinbefore described.
1338.59	Point for the center E 1/16 sec. cor. of sec. 22. Not monumented.
2677.18	The center 1/4 sec. cor. of sec. 22.
4013.72	Point for the center W 1/16 sec. cor. of sec. 22. Not monumented.
5350.26	The 1/4 sec. cor. of secs. 21 and 22.
	<hr/> <p>From the E 1/16 sec. cor. of secs. 22 and 27.</p> <p>N. 0° 03' 49" W., on the N. and S. center line of the SE 1/4 of sec. 22.</p>
661.27	Point for the center S-SE 1/64 sec. cor. of sec. 22. Not monumented.
1047.66	Intersect line 3-2 of Portland Lode, Mineral Survey No. 789, hereinbefore described.
1322.54	Point for the SE 1/16 sec. cor. of sec. 22, at intersection with the E. and W. center line of the SE 1/4. Not monumented.
2261.03	Intersect line 1-2 of Josephine Lode, Mineral Survey No. 789, hereinbefore described.
2645.08	The center E 1/16 sec. cor. of sec. 22.
	<hr/> <p>From the S 1/16 sec. cor. of secs. 22 and 23.</p> <p>N. 89° 43' 17" W., on the E. and W. center line of the SE 1/4 of sec. 22.</p>
1086.82	Intersect line 3-2 of Portland Lode, Mineral Survey No. 789, hereinbefore described.
1332.50	The SE 1/16 sec. cor. of sec. 22.
1998.75	Point for the center W-SE 1/64 sec. cor. of sec. 22. Not monumented.

Subdivision of Section 22,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
2551.97	Intersect line 3-4 of Josephine Lode, Mineral Survey No. 789, hereinbefore described.
2665.00	The center S 1/16 sec. cor. of sec. 22.
	<hr/> <p>From the W-E 1/64 sec. cor. of secs. 22 and 27.</p> <p>N. 0° 11' 53" W., on the N. and S. center line of the SW 1/4 of the SE 1/4 of sec. 22.</p>
659.67	<p>Point for the SW-SE 1/64 sec. cor. of sec. 22, at intersection with the E. and W. center line of the SW 1/4 of the SE 1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S 22 SW-SE 1/64 2021</p> <p>from which</p> <p style="padding-left: 40px;">A fir, 11 ins. diam., bears N. 1 1/2° E., 24.9 ft. dist., mkd. X at breast height and BT at the base.</p> <p style="padding-left: 40px;">A fir, 20 ins. diam., bears S. 39° E., 27.4 ft. dist., mkd. SW SE 1/64 S22 BT.</p>
820.93	Intersect line 4-3 of Portland Lode, Mineral Survey No. 789, hereinbefore described.
1319.34	The center W-SE 1/64 sec. cor. of sec. 22.
	<hr/> <p>From the center S-SE 1/64 sec. cor. of sec. 22.</p> <p>N. 89° 34' 57" W., on the E. and W. center line of the SW 1/4 of the SE 1/4 of sec. 22.</p>
344.61	Intersect line 3-2 of Portland Lode, Mineral Survey No. 789, hereinbefore described.
486.23	Intersect line 4-3 of Portland Lode, Mineral Survey No. 789, hereinbefore described.
664.73	The SW-SE 1/64 sec. cor. of sec. 22.
1329.46	The center S-S 1/64 sec. cor. of sec. 22.
	<hr/>

Subdivision of Section 22,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
	From the W 1/16 sec. cor. of secs. 22 and 27.
	N. 0° 12' 06" W., on the N. and S. center line of the SW 1/4 of sec. 22.
659.46	Point for the center S-SW 1/64 sec. cor. of sec. 22. Not monumented.
1073.80	Intersect line 3-4 of Marshall Quartz Lode, Mineral Survey No. 319, hereinbefore described.
1318.92	Point for the SW 1/16 sec. cor. of sec. 22, at intersection with the E. and W. center line of the SW 1/4. Not monumented.
1667.11	Intersect line 1-2 of Marshall Quartz Lode, Mineral Survey No. 319, hereinbefore described.
2637.84	The center W 1/16 sec. cor. of sec. 22.
<hr/>	
	From the center S 1/16 sec. cor. of sec. 22.
	S. 89° 52' 57" W., on the E. and W. center line of the SW 1/4 of sec. 22.
669.82	Point for the center E-SW 1/64 sec. cor. of sec. 22. Not monumented.
1196.65	Intersect line 2-3 of Marshall Quartz Lode, Mineral Survey No. 319, hereinbefore described.
1339.64	The SW 1/16 sec. cor. of sec. 22.
2655.57	Intersect line 4-1 of Marshall Quartz Lode, Mineral Survey No. 319, hereinbefore described.
2679.25	The S 1/16 sec. cor. of secs. 21 and 22.
<hr/>	
	From the E-W 1/64 sec. cor. of secs. 22 and 27.
	N. 0° 16' 04" W., on the N. and S. center line of the SE 1/4 of the SW 1/4 of sec. 22.
658.76	Point for the SE-SW 1/64 sec. cor. of sec. 22, at intersection with the E. and W. center line of the SE 1/4 of the SW 1/4.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, in a collar of stone, with brass cap mkd.
	S 22 SE-SW 1/64 2021
	from which

**Subdivision of Section 22,
T. 33 S., R. 5 W., Willamette Meridian, Oregon**

FEET	<p>A cedar, 7 ins. diam., bears S. 25 1/2° W., 12.0 ft. dist., mkd. X at breast height and BT at the base.</p> <p>A fir, 11 ins. diam., bears N. 33 1/4° W., 22.1 ft. dist., mkd. X at breast height and BT at the base.</p>
1317.53	<p>The center E-SW 1/64 sec. cor. of sec. 22.</p> <hr/> <p>From the center S-S 1/64 sec. cor. of sec. 22.</p> <p>S. 89° 49' 22" W., on the E. and W. center line of the SE 1/4 of the SW 1/4 of sec. 22.</p>
670.59	<p>The SE-SW 1/64 sec. cor. of sec. 22.</p>
1341.18	<p>The center S-SW 1/64 sec. cor. of sec. 22.</p> <hr/> <p style="text-align: center;">Subdivision of Section 26, T. 33 S., R. 5 W., Willamette Meridian, Oregon</p> <hr/> <p>From the 1/4 sec. cor. of secs. 26 and 35, reported by Gawron et al., in 1965-67, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W S 26 1/4 ——— S 35 1966</p> <p>from which bearing trees reported by Gawron et al.</p> <p>A fir, 29 ins. diam., bears N. 5° E., 13.2 ft. dist., with a healed blaze.</p> <p>A fir, 48 ins. diam., bears S. 70° E., 73.9 ft. dist., with no marks visible on open blaze. (Original)</p> <p>A fir, 37 ins. diam., bears S. 71° W., 7.3 ft. dist., with a healed blaze.</p> <p>N. 0° 38' 00" E., on the N. and S. center line of sec. 26.</p>
1330.35	<p>The center S 1/16 sec. cor. of sec. 26, established by Nickerson, PLS No. 1649, in 1978; and is accepted as the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, with top 8 ins. below the surface of the gravel road, from which a bearing tree mkd. by Nickerson</p> <p>A fir, 23 ins. diam., bears S. 64 3/4° W., 41.9 ft. dist., with a healed blaze. Add scribe marks CS 1/16 S26 BT on new blaze and drive a Mag Nail at the base on right side center.</p>

Subdivision of Section 26,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
2573.90	<p>The 1/4 sec. cor. of secs. 23 and 26.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 25 and 26, reported by Simon in 1995-96, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T 33 S R 5 W 1/4 S 26 S 25 1974</p> <p>from which bearing trees reported by Simon</p> <p style="padding-left: 40px;">A fir, 33 ins. diam., bears S. 18 1/4° E., 13.9 ft. dist., with a healed blaze. (Original)</p> <p style="padding-left: 40px;">A fir, 20 ins. diam., bears S. 75° W., 23.4 ft. dist., with a healed blaze.</p> <p>N. 88° 24' 15" W., on the E. and W. center line of sec. 26.</p>
2683.96	<p>The center 1/4 sec. cor. of sec. 26.</p> <hr/> <p>N. 88° 26' 38" W., beginning new measurement.</p>
1354.36	<p>The center W 1/16 sec. cor. of sec. 26, established by Nickerson, PLS No. 1649, in 1978; and is accepted as the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, from which bearing trees mkd. by Nickerson</p> <p style="padding-left: 40px;">A fir, 22 ins. diam., bears S. 29 1/2° E., 34.1 ft. dist., with a healed blaze. Add scribe marks CW 1/16 S26 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p style="padding-left: 40px;">A cedar, 18 ins. diam., bears N. 23° W., 6.3 ft. dist., with a healed blaze. Add scribe marks X at breast height and BT at the base on new blazes and drive a Mag Nail at the base on right side center.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <p style="text-align: center;">W 1/16 C ——— C S 26 2021</p> <hr/> <p>N. 88° 24' 14" W., beginning new measurement.</p>

Subdivision of Section 26,
T. 33 S., R. 5 W., Willamette Meridian, Oregon

FEET	
1354.17	<p>The 1/4 sec. cor. of secs. 26 and 27.</p> <hr/> <p>From the center W 1/16 sec. cor. of sec. 26.</p> <p>N. 0° 15' 07" E., on the N. and S. center line of the NW 1/4 of sec. 26.</p>
1304.76	<p>The NW 1/16 sec. cor. of sec. 26, established by Nickerson, PLS No. 1649, in 1978; and is accepted as the cor.; monumented with an iron rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, from which bearing trees mkd. by Nickerson</p> <p style="padding-left: 40px;">A cedar, 21 ins. diam., bears N. 20 1/2° E., 42.6 ft. dist., with a healed blaze. Add scribe marks X at breast height and BT at the base on new blazes and drive a Mag Nail at the base on right side center.</p> <p style="padding-left: 40px;">A fir, 27 ins. diam., bears N. 50° W., 49.0 ft. dist., with a healed blaze. Add scribe marks NW 1/16 S26 BT on new blaze and drive a Mag Nail at the base on right side center.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, directly over the iron rod, with brass cap mkd.</p> <p style="text-align: center;">NW 1/16 S 26 2021</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 15' 37" E., beginning new measurement.</p>
1288.06	<p>The W 1/16 sec. cor. of secs. 23 and 26.</p> <hr/> <p>From the center N 1/16 sec. cor. of sec. 26.</p> <p>N. 87° 42' 08" W., on the E. and W. center line of the NW 1/4 of sec. 26.</p>
1363.40	<p>The NW 1/16 sec. cor. of sec. 26.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 87° 41' 55" W., beginning new measurement.</p>
1374.35	<p>The N 1/16 sec. cor. of secs. 26 and 27.</p> <hr/>