

6-1-52

$\frac{1}{4}$ corner 4-5, T29S, R5W,
as set by proportional
measurement.

At a point on Section Line
between 4 + 5; 2782' South
of the NW cor 4 and
2737' North of the SW
cor of Sec. 4, I drove
a 1" x 30" I.P. for $\frac{1}{4}$ cor
section 4 + 5

from which

A W.O. 30" diam. bears S70W,
45.0' dist. mkd. $\frac{1}{4}$ S S, B.T.

A W.O. 10" diam. bears S28°W,
57.5' dist. mkd. $\frac{1}{4}$ S B.T.

Creek bears West 80.0'
dist.

An East-West fence
runs 10' South of Corner.


Corner lies along South edge
of old road in opening.

Witness:

Geo. & Dennis Vaughn.

(OVER)

44/53^{3,2}
C.S. F. No. 11/53

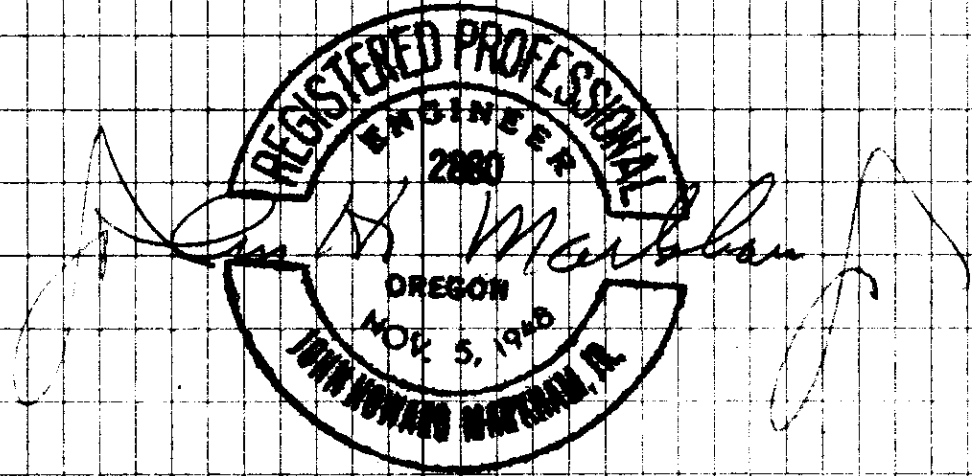

The line between 4 & 5
runs N 7°30' W (Var. 20°00')

Work done for Stomax Hbr Co.

**FILED
RECEIVED**

JUN 3 1952

**COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.**