

LANE COUNTY RESTORED CORNER

Index 2239

Corner Center  $\frac{1}{4}$  Corner to Section 36

Twp. 22 S R. 4 W

From original G. L. O. field notes, dated \_\_\_\_\_

EVIDENCE FOUND: \_\_\_\_\_, 19\_\_\_\_

Corner \_\_\_\_\_

Witness \_\_\_\_\_

Marks \_\_\_\_\_


From reestablishment field notes, dated \_\_\_\_\_

EVIDENCE FOUND: \_\_\_\_\_, 19\_\_\_\_

Corner \_\_\_\_\_

Witness \_\_\_\_\_

Marks \_\_\_\_\_

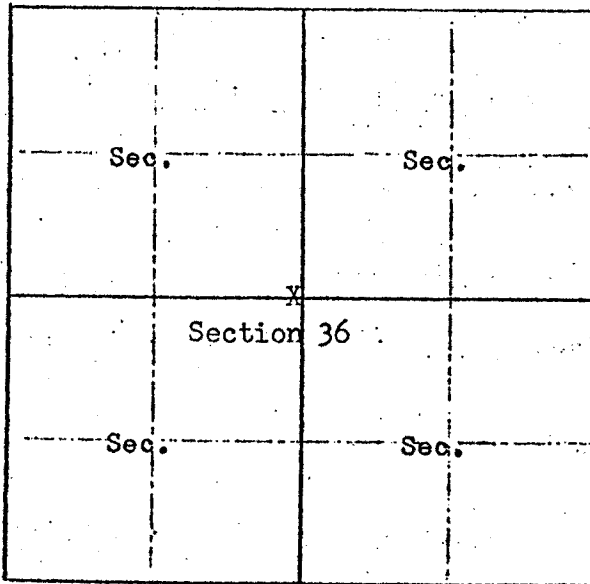

RETRACEMENT NOTES: Set Stake 4" by 4" by 36" for center of Section 36.

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Gilbert A. Gardner  
Signature

C.S. 41/223  
(for W. A. Woodard Lbr. Co.)  
Title

\_\_\_\_\_  
Date

Douglas County Surveyor's Office

CS53/1-46

85-028-01