

SURVEY BY SEEK, INC.  
FOR MOORE MILL AND LUMBER COMPANY  
To Establish a Portion of the Exterior Boundaries  
Of Section 8, T30S, R8W, W.M., Douglas County, Oregon

The survey was initiated at the corner to Sections 5, 6, 7, and 8, T30S, R8W, which is a brass cap with accessories as noted in the County Surveyor's records. Thence the traverse was begun on a due south bearing. At 2640 feet the 1/4 corner between Sections 7 and 8 was searched for but not found. The traverse was continued south to the corner to Sections 7, 8, 17, and 18, which is a brass cap with accessories as noted in the records of the County Surveyor. The true bearing and length of this line was determined to be  $S0^{\circ} 25' 28''W$ , 5195.13 feet. At proportionate distance of 2597.57 feet,  $S0^{\circ} 25' 29''W$  of the corner to Sections 5, 6, 7, and 8, the 1/4 corner between Sections 7 and 8 was established. A 1" in diameter by 30" galvanized iron pipe was set at the point for the corner from which an 8" in diameter White Fir bears  $N36^{\circ} 08' 12''W$ , 8.4 feet, marked 1/4 S 7 BT; and an 8" diameter White Fir bears  $N87^{\circ} 33' 43''E$ , 7.5 feet.

Beginning at the corner to Sections 5, 6, 7, and 8 the traverse was continued east. At 2640 feet the 1/4 corner between Sections 5 and 8 was searched for but not found. The traverse was continued east to the corner of Sections 4, 5, 8, and 9, which is a brass cap with accessories as noted in the records of the County Surveyor. The true bearing and length of this line was determined to be  $N87^{\circ} 43' 23''E$ , 5236.36 feet. At proportionate distance of 2618.18 feet,  $N87^{\circ} 43' 23'' E$  of the corner to Sections 4, 5, 8, and 9, the 1/4 corner between Sections 5 and 8 was established. A 1" in diameter by 30" galvanized iron pipe was set at the point for the corner from which a 7" White Fir bears  $N38^{\circ} 48' 56'' W$ , 21.09 Feet, marked 1/4 S 5 BT; and an 18" Cedar bears  $S48^{\circ} 41' 14'' E$ , 25.5 feet.


From the corner to Sections 4, 5, 8 and 9 the traverse was continued south. At 2640 feet the 1/4 corner between Sections 8 and 9 was searched for but not found. The traverse was continued south to the corner to Sections 8, 9, 16, and 17 which is marked with a brass cap and accessories as recorded at the County Surveyor's office. The bearing and length of this line was determined to be  $S0^{\circ} 15' 48''W$ , 5209.53 feet. The 1/4 corner between Sections 8 and 9 was set at proportionate distance of 2604.77 feet,  $S0^{\circ} 15' 48''W$  of the corner to Sections 4, 5, 8, and 9. At the point for the corner a 1" in diameter by 30" galvanized iron pipe was set from which a 9" White Fir bears  $N55^{\circ} 54' 11''W$ , 22.3 feet, marked 1/4 S 8 BT; and a 7" White Fir bears  $N42^{\circ} 36' 39''E$ , 29.0 feet, marked 1/4 S 9 BT.

All true lines were blazed. Bearings were determined by Solar observation.

FILED  
RECEIVED 21, 1967

JUL 21 1967

COUNTY SURVEYOR  
DOUGLAS COUNTY, ORE.

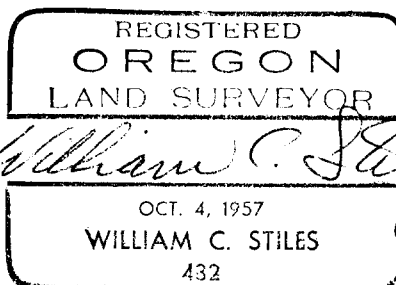

C.S. File 55/44

Map File M34-19