


PUBLIC LAND CORNERS

WEYERHAEUSER COMPANY
 SPRINGFIELD BRANCH

TOWNSHIP 25S RANGE 2W

SECTION 8 CORNER S-1/16 "K"

COUNTY Douglas OREGON

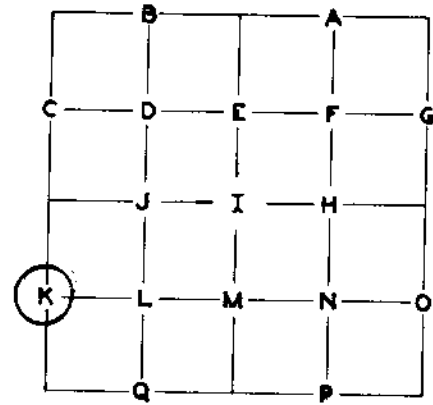

~~XXXXXXXXXXXXXXXXXX~~
 Vern Hosford
 DATE: 1958
 CORNER 1-1/2" x 36" Iron Pipe
Set by Transit Survey
 ACCESSORIES:

	BEARING-	LINKS-	FEET-
30" Hemlock	N52° E		30-2
30" Cedar	N 73° E		30-6

PRESENT CONDITION - (DESCRIBE FULLY -
 USE PAGE 2 IF NEEDED FOR EXPLANATION.)

Found after removing old log

Found 30" Hemlock Stump - Scribing visible.

Found a turned out cedar, logs removed. Scribing not seen, probably removed with butt log. Good for distance and bearing.

Weyerhaeuser SURVEY RECORD
 by Glen McChesney DATE: 7/29/59
 Found Hosford's iron pipe in place and his
 BT's standing with visible scribing.
 Put plates and W nails on:
 30" Cedar N 73° W 30.2 (Hosford BT)
 58" Fir S10° E 22.6

PRESENT CONDITION:

See above
Turned out stump root wad with plate and with W nail down into dirt.

CORNER ~~XXXX~~ pipe as set by Hosford MAG. DECL.: 20°

BEARING AND DISTANCE TO ABOVE IDENTIFIED SURVEY ACCESSORIES:

BEARING-	FEET-	SURVEY-	
N52E	30.2	Hosford	to scribed face
N73W	30.6	"	to root hole
S10°E	22.6	W.Co-1959	" " "

ACCESSORIES ADDED THIS DATE: 7/8/1974

MAGNETIC DECLINATION 20°

	BEARING	FEET	ORIG. B.T.	'W' NAIL	PLATE	BRASS DISC
30" Red Cedar	N18°E	49.5	----	X	X	----
30" Red Cedar Stump	S87°W	18.6	----	X	X	----

IDENTIFIED ON PHOTO:

INFORMATION ON LOCATION OF CORNER AS NOW SET:

GROUND COVER: Vine Maple, Salal - Old Logging

(USING FORM LINES SKETCH TOPOG AT CORNER ON PAGE 2 PLAT)

SLOPE FACES (GIVE BEARING IN DEGREES) N 20 E ON MINUS (-) 30 %

NORTH: - 25% 55' to head of draw drains easterly

FROM CORNER ↓

SOUTH: + 25%

EAST: - 20%

WEST: + 25%

WORK DONE FOR W. CO.

FIELD NOTES IN BOOK:

BY: Glen McChesney DATE: 7/8/1974
Project ENGINEER - ~~XXXXXXXX~~

ASSISTED BY:

COPIES SENT TO:

UNDER THE SUPERVISION OF:

REGISTERED PROFESSIONAL LAND SURVEYOR

Frank O. Williams

DREGON JULY 12, 1966 FRANK O. WILLIAMS 0875

SEAL

PAGE 3

C. S. File No. 58/B

36	31	32	33	34	35	36	31
1	6	5	4	3	2	1	6
12	7	8	9	10	11	12	7
13	18	17	16	15	14	13	18
24	19	20	21	22	23	24	19
25	30	29	28	27	26	25	30
36	31	32	33	34	35	36	31
1	6	5	4	3	2	1	6

WEYERHAEUSER COMPANY

CORNER REFERENCE METHOD CONSISTS OF:

A "W" NAIL DRIVEN THRU THE HOLE IN A BRASS DISC, INTO A NOTCH CUT LOW ON A TREE, STAMPED WITH THE OREGON REGISTERED LAND SURVEYOR OR PROFESSIONAL ENGINEER REGISTRATION NUMBER.

AN EMBOSSED ALUMINUM PLATE, NAILED HEAD HIGH ON SAME TREE WITH 8D ALUMINUM NAILS, WITH DISTANCE AND BEARING FROM THE "W" NAIL TO THE CORNER STAMPED ON IT.

