

T.31S., R.3W.W.M.

EQUATION
P.C. 715+63.90 BK.
P.O.T. 715+63.77 AN

5° CL
Δ-47°53'
T-508.80
L-957.66

Inst. 18" Conc. Culk. 44 ft.
Dr. Exc. 9 Cu. Yds.
Permit to Enter

Inst. 18" Conc. Culk. 44 ft.
Dr. Exc. 11 Cu. Yds.

Inst. 18" Conc. Culk. 96 ft.
Dr. Exc. 12 Cu. Yds.

Inst. 18" Conc. Culk. 40 ft.
Dr. Exc. 5 Cu. Yds.

E.F. Lane & Ruth S. Lane

Const. Spcl. Ditch 100 ft.

Slope Protection
Inst. 12" Conc. Culk. 12 ft.
Dr. Exc. 150 Cu. Yds.

+90 Const. Driveway 40 ft.
Inst. 12" Wood Gate

+150 Const. Driveway 40 ft.
Inst. 12" Wood Gate

Const. Rd. App.
+150 Inst. 12" Wood Gate


COY. CREEK

P.C. 738+59.25

Clarence Miller & Bernadine Miller

H. L. Natensstedt

• Indicates 3/4" Iron pins & 4 x 4 Posts

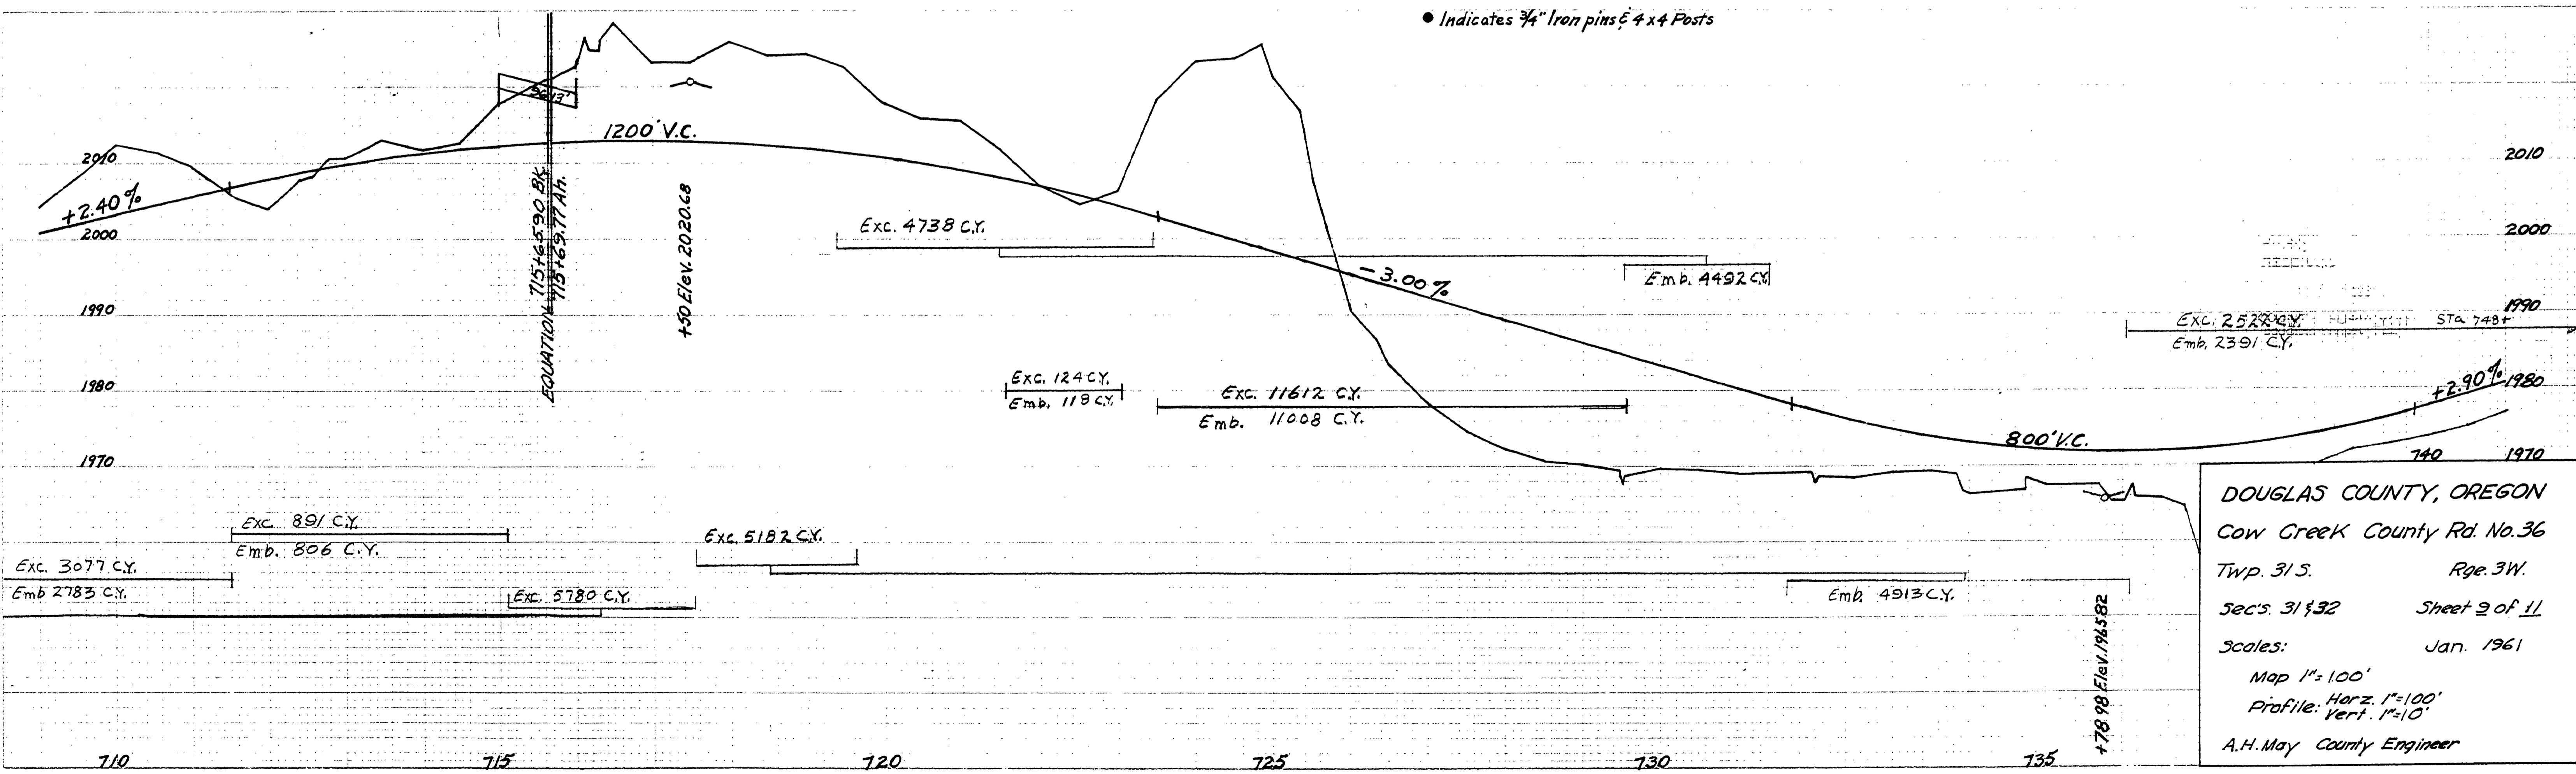

DOUGLAS COUNTY, OREGON
Cow Creek County Rd. No. 36
Twp. 31S. Rge. 31W.
Secs. 31 & 32 Sheet 9 of 11
Scales: Jan. 1961
Map 1"=100'
Profile, Horiz. 1"=100'
Vert. 1"=10'
A.H. May County Engineer

M.P. 13.23-13.30

Co Rd. #36

Jan. 1961
Sheet 9 of 11

13231380