


CURVE TABLE					
CURVE	CHORD BEARING	CHORD LENGTH	RADIUS	CURVE LENGTH	DELTA
C1	S43°38'58"E	24.04'	17.00'	26.70'	89°59'16"
C2	N46°21'02"E	24.04'	17.00'	26.71'	90°00'44"
C3	N43°38'58"W	24.04'	17.00'	26.70'	89°59'16"
C4	S56°44'54"W	13.63'	12.00'	14.50'	69°12'59"
C5	N62°29'06"E	64.74'	50.00'	70.42'	80°41'23"
C6	S45°26'06"E	52.60'	50.00'	55.39'	63°28'13"
C7	S01°13'15"W	25.75'	50.00'	26.04'	29°50'29"
C8	S31°13'43"W	26.03'	50.00'	26.33'	30°10'27"
C9	S63°05'14"W	28.86'	50.00'	29.27'	33°32'36"
C10	N77°53'39"W	37.86'	50.00'	38.83'	44°29'37"
C11	S72°08'43"E	6.82'	12.00'	6.91'	32°59'45"
C12	N46°21'02"E	24.04'	17.00'	26.71'	90°00'44"
C13	N43°38'58"W	24.04'	17.00'	26.70'	89°59'16"
C14	N46°21'02"E	24.04'	17.00'	26.71'	90°00'44"

- LEGEND**
- SET 5/8" x 30" IR w/CAP MARKED "I.E. ENGINEERING" UNLESS OTHERWISE NOTED
 - ◻ SET 5/8" x 30" IR w/ALUMINUM CAP MARKED "I.E. ENGINEERING"
 - 5/8" x 30" IR w/CAP MARKED "I.E. ENGINEERING" IN WATER METER
 - FOUND 5/8" IRON ROD UNLESS OTHERWISE NOTED
 - FOUND 1/2" IRON PIPE UNLESS OTHERWISE NOTED
 - △ CALCULATED POSITION
 - () R1 RECORD AS PER VOL. 20, PG. 16
 - () R2 RECORD AS PER VOL. 20, PG. 56
 - () R3 RECORD AS PER VOL. 21, PG. 24
 - () R4 RECORD AS PER M9-61
 - () R5 RECORD AS PER VOL. 4, PG. 67
 - () R6 RECORD AS PER M128-15

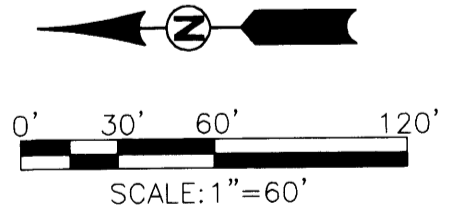

<p>REGISTERED PROFESSIONAL LAND SURVEYOR</p> <p><i>Ronald A. Quimby</i> OREGON JULY 14, 1978 RONALD A. QUIMBY 1854</p> <p>EXPIRES: 12/31/2006</p>	<p>MONT CLAIRE SUBDIVISION, PHASE 6</p> <p>LYING IN THE SE AND SW 1/4 OF SECTION 13 AND THE NE AND NW 1/4 OF SECTION 24, TOWNSHIP 25 SOUTH, RANGE 6 WEST, WILLAMETTE MERIDIAN, DOUGLAS COUNTY, OREGON</p>	
	<p>SURVEYED FOR: AVERY CONSTRUCTION P.O. BOX 277 WINCHESTER, OR 97495</p>	<p>SURVEYED BY: i.e. ENGINEERING 505 SE Main Street Roseburg, Oregon 97470 PHONE (541) 673-0166 FAX (541) 440-9392 iemail@ieengineering.com</p>
<p>SCALE: AS SHOWN</p>	<p>DATE: DEC., 2005</p>	<p>DWG. BY: JAC JOB NO: 1475-16T6 PAGE: 3 OF 3</p>